

CHECK POINT

2560 / 2570 Appliances

Quick Start Guide



1

Power Up Your Check Point Appliance

1. Connect the appliance to the power supply and click the power button.
2. When the appliance is turned on, the Status/Power LED turns red briefly and then blinks blue. When the LED turns solid blue, log in to the appliance.

Note - The LED is red if there is an alert or error.



2

Connect your Check Point appliance to the network

Connect an Ethernet cable from your router LAN port to the WAN port on the appliance front panel. The WAN Link LED on the front panel will light up in green when the connection is established and active.

If you use an external router:


Connect the Ethernet cable to the WAN port on the front panel. The WAN Link LED turns green when the connection is active.



To connect to the appliance

► Option #1 - For appliances with WiFi

1. Use the SSID (WiFi network name) and password printed on the appliance sticker to connect connect to the appliance.

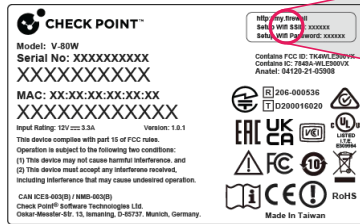

<http://my.firewall>
 Setup With SSID: XXXXXX
 Setup With Password: XXXXXX


Contains FCC ID: TK4WLE300VX
 Contains IC: 7849A-WLE300VX
 Anatel: 04120-21-05508

2. Launch the web browser and enter <http://my.firewall> for First Time Configuration.

Note – The WIFI signal is available for only twelve hours from when the appliance turns on for the first time.

► Option #2 - For all appliance flavors

1. Connect an ethernet cable between your PC/Laptop and one of the LAN ports on the appliance.
2. Launch the Web browser and enter <http://my.firewall> or <https://192.168.1.1:4434> in the address bar.

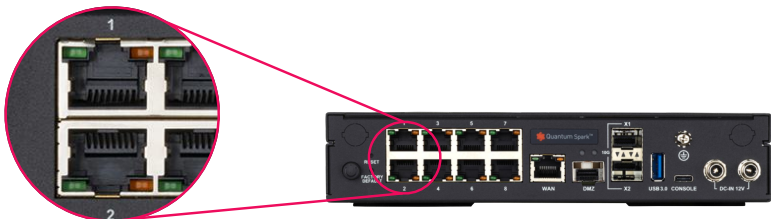


Note – As the appliance does not have a formally signed certificate, you may receive an error message. Click “Continue to this Web site”.

Note – If you use the Firefox Web browser, you will receive a prompt to add an exception to connect.

Click “Add Exception” > “Get Certificate” > “Confirm Security Exception”.

4 Configure your Check Point appliance

After you log in, follow the steps in the First Time Configuration Wizard.

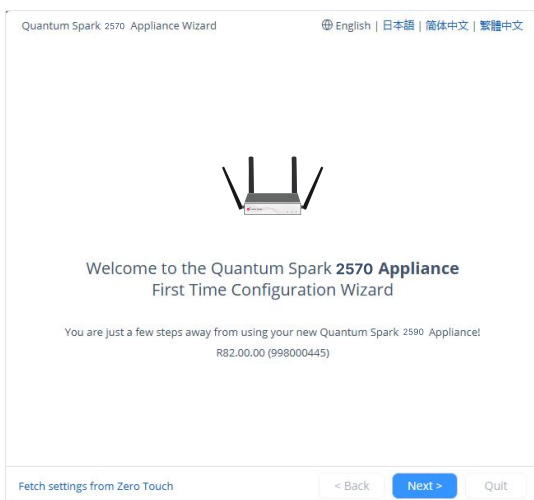

First Time Configuration Wizard - Welcome page

License Activation and Technical Support

The appliance comes with a 30-day trial license.

If you did not activate your purchased license while running the First Time Configuration Wizard (see Step 4), in the WebUI, go to "Home" > "License" and click "Activate".

If the device is not connected to the internet:

1. Go to <http://smbregistration.checkpoint.com> and obtain a License Activation file.
2. Upload the Activation File: Go to Home > License and click Offline.

For technical support:

- Log in to the Check Point User Center
<https://usercenter.checkpoint.com/usercenter/login/cpapp> to monitor your license status, open support tickets and more.
- Contact us by phone, 24/7:
 - +1 972 444 6600 (Americas)
 - +972 3 611 5100 (International)

WatchTower Companion Application for Spark

We highly recommend that you download the Check Point WatchTower app, which lets you configure, monitor, and get security alert notifications on your smartphone.



Additional Instructions

To complete configuring the gateway please refer to

https://sc1.checkpoint.com/documents/Appliances/GSG_T1.2/EN/Default.htm

or simply scan this QR code.

WWW.CHECKPOINT.COM

©2025 Check Point Software Technologies Ltd. All rights reserved.

Check Point and the Check Point logo are trademarks or registered trademarks of Check Point Software Technologies Ltd. or its affiliates. All other product names mentioned herein are trademarks or registered trademarks of their respective owners. The products described in this document are protected by U.S. Patent No. 5,606,668, 5,835,726, 6,496,935, 6,873,988, and 6,850,943 and may be protected by other U.S. Patents, foreign patents, or pending applications.