



QUANTUM

CHECK POINT

QUANTUM FORCE

19000 & 29000 SERIES APPLIANCES

Quick Start Guide



Scan the QR code to open the home page



CHECK POINT™



WARNING! Before you begin the appliance installation, read all the safety instructions. Search for *Quantum Force 19000 & 29000 Appliances Getting Started Guide* or scan this QR code:



Latest Software: We recommend that you install the most recent software release to stay up-to-date with the latest functional improvements, stability fixes, security enhancements, and protection against new and evolving attacks.


Thank you for choosing the Check Point 19000 & 29000 Series Security Appliance, part of the Check Point Infinity consolidated architecture. You are now minutes away from setting up the most advanced security platform designed to prevent the most sophisticated threats today and in the future.

Should you have any questions about your purchase, please don't hesitate to contact Check Point support services.

1

POWER UP YOUR CHECK POINT APPLIANCE

Connect the power cables to the power ports on the appliance rear panel and plug them into power outlets. The machine is powered on automatically after connecting the power cords.

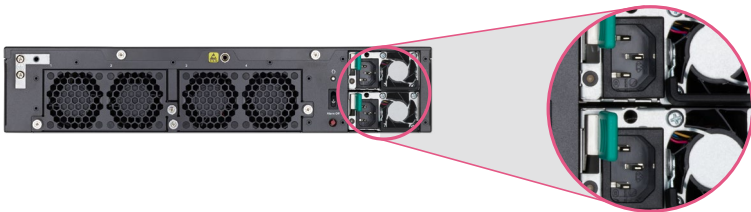


2

SET UP YOUR APPLIANCE

Select one of these options:

OPTION #1 - USE YOUR MOBILE DEVICE


1. Pull out the service tag on the appliance.
2. Scan the QR code on the tag to interactively set up your appliance.
3. Follow the online instructions that guide you through the set up steps.

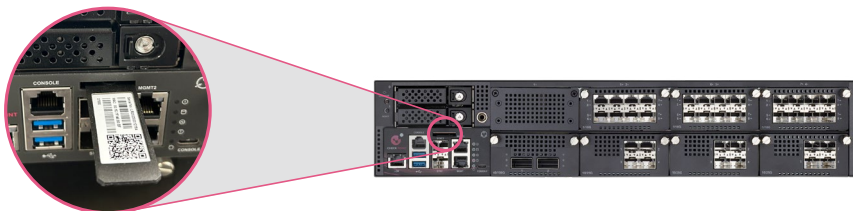

OPTION #2 - USE YOUR PC

Connect Your PC for Initial Setup

Initial setup must be done from a PC connected to the appliance's management interface via the included Ethernet cable. The management interface is marked as MGMT on the appliance front panel.

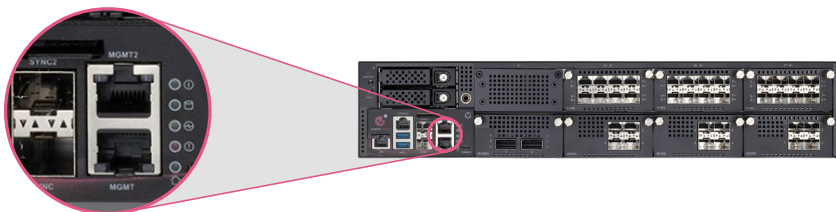

Windows 8 & 10 & 11 configuration

1. Right-click a **network** adapter to assign an IP address and click **Properties**.
2. Select Internet Protocol Version 4 (TCP/IPv4) and click the **Properties** button.
3. In the IP address field, enter **192.168.1.2**.
4. In the Subnet mask field, enter **255.255.255.0**.

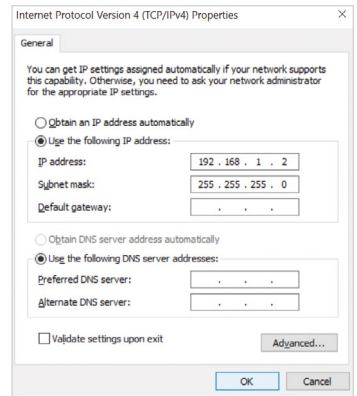


Figure 1
Internet Protocol (TCP/IP) Properties

5. Leave the **Default gateway** and **DNS settings** fields empty.
 6. Click **OK** and close the dialog boxes.
- After completing the initial connection, the First Time Configuration Wizard guides you through the process of configuring the appliance.

Configure Your appliance

1. Launch the Web browser and enter **https://192.168.1.1** in the address bar.
Note – You might receive a certificate error page due to a known, unresolved browser conflict. Click **Continue to this Web site**.
2. Log in with the default system administrator login name/password, **admin/admin**, and click **Login**.

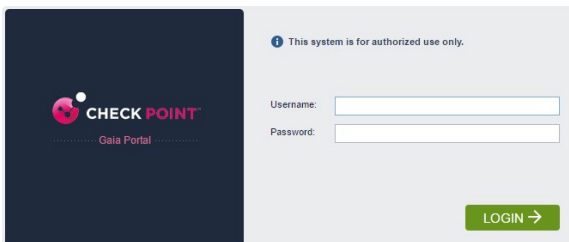


Figure 2
Appliances Login Page

- The First Time Configuration Wizard will appear automatically (Fig. 3).
- The wizard will guide you through the connection setup process. Fill in the parameters as required.

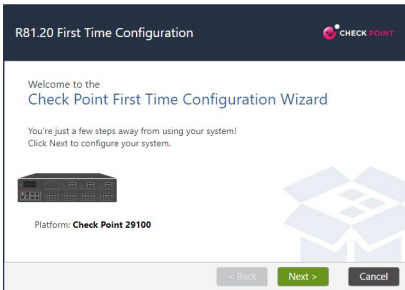


Figure 3

First Time Configuration Wizard – Welcome Page



For additional information regarding setting up your appliance, search for *Quantum Force 19000 & 29000 Appliances Getting Started Guide* or scan this QR code:



For more information, visit the Check Point appliance Support page. Search for *Check Point Quantum Force 19000 & 29000 Appliances* or scan this QR code:



3

TECHNICAL SUPPORT

For further information about the appliance, search for *Check Point User Center*: <https://usercenter.checkpoint.com/usercenter/login/cpapp>

For technical assistance, contact Check Point 24 hours a day, seven days a week at:

+1 972-444-6600 (Americas)

+972 3-611-5100 (International)

WELCOME TO THE FUTURE OF CYBER SECURITY

CLOUD • MOBILE • THREAT PREVENTION



WWW.CHECKPOINT.COM

©2023-2024 Check Point Software Technologies Ltd. All rights reserved.

Check Point and Check Point logo are trademarks or registered trademarks of Check Point Software Technologies Ltd. or its affiliates. All other product names mentioned herein are trademarks or registered trademarks of their respective owners. The products described in this document are protected by U.S. Patent No. 5,606,668, 5,835,726, 6,496,935, 6,873,988, and 6,850,943 and may be protected by other U.S. Patents, foreign patents, or pending applications.