



Check Point
SOFTWARE TECHNOLOGIES LTD.

CHECK POINT

SMART-1™ 405/410 APPLIANCE

Quick Start Guide



CHECK POINT
INFINITY



WARNING! Before you begin with the appliance installation, read all the safety instructions. Search for *Smart-1 405/410 Appliance Getting Started Guide*.
<http://downloads.checkpoint.com/dc/download.htm?ID=55885>



Latest Software: We recommend that you install the most recent software release to stay up-to-date with the latest functional improvements, stability fixes, security enhancements, and protection against new and evolving attacks.

Thank you for choosing the Check Point Smart-1 405/410 Security Management Appliance, part of the Check Point Infinity consolidated architecture. You are now minutes away from setting up the most advanced security platform designed to prevent the most sophisticated threats today and in the future.

Should you have any questions about your purchase, please don't hesitate to contact Check Point support services.

1

POWER UP YOUR CHECK POINT APPLIANCE

- Connect the power cable to the power port on the Smart-1 appliance rear panel and plug it into a power outlet.
- Turn the power on.



2

CONNECT YOUR PC FOR INITIAL SETUP

- Initial setup must be done from a PC connected to the appliance's management interface via the included Ethernet cable. Management interface is marked as MGMT on the appliance front panel.



Windows 7, 8, and 10 configuration:

- Right-click on the **network** adapter you want to assign an IP address and click **Properties**.
Select Internet Protocol Version 4 (TCP/IPv4) and click the **Properties** button.
- In the IP address field, enter **192.168.1.2**.
- In the Subnet mask field, enter **255.255.255.0**.
- Leave the **Default gateway** and **DNS settings** fields empty.
- Click **OK** and close the dialog boxes.
- After completing the initial connection, the First Time Configuration Wizard will guide you through the process of configuring the appliance.

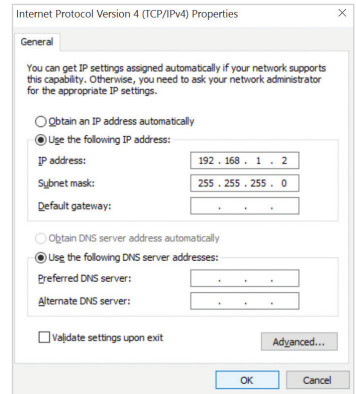


Figure 1
Internet Protocol (TCP/IP) Properties

3

CONFIGURE YOUR APPLIANCE

- Launch the Web browser and enter **https://192.168.1.1** in the address bar.
Note – You might receive a certificate error page due to a known, unresolved browser conflict. Click **Continue to this Web site**.
- Log in with the default system administrator login name/password, **admin/admin**, and click **Login**.

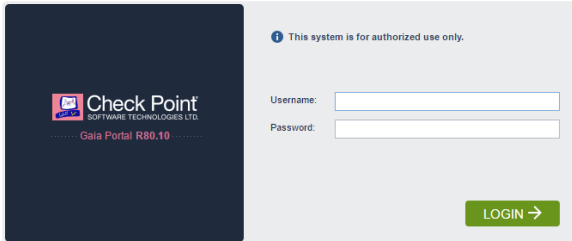


Figure 2
Appliances Login Page

Note – Popups must always be allowed on `https://<appliance_ip_address>`.

- The First Time Configuration Wizard will begin automatically (Fig. 3).
- The wizard will guide you through the connection setup process. Fill in the parameters as required.

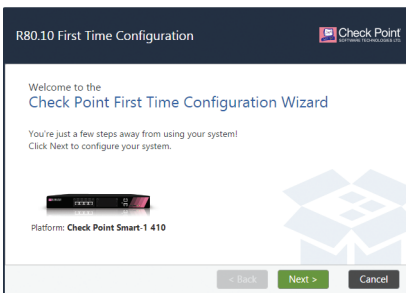


Figure 3
First Time Configuration Wizard – Welcome Page

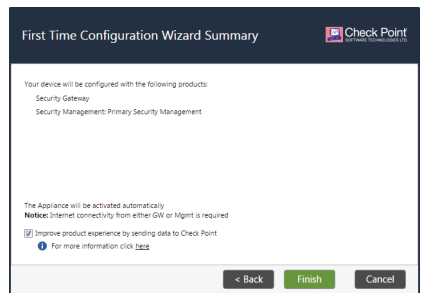


Figure 4
First Time Configuration Wizard – Summary Page



For additional information regarding setting up your appliance, search for *Smart-1 405/410 Appliance Getting Started Guide*
<http://downloads.checkpoint.com/dc/download.htm?ID=55885>



For more information, visit the Check Point appliance Support page. Search for *Check Point Smart-1 405/410 Appliance*.
<http://supportcontent.checkpoint.com/solutions?id=sk117578>

4

TECHNICAL SUPPORT

For further information about the appliance, search for *Check Point User Center*: <https://usercenter.checkpoint.com/usercenter/login/cpapp>

For technical assistance, contact Check Point 24 hours a day, seven days a week at:

+1 972-444-6600 (Americas)

+972 3-611-5100 (International)

WELCOME TO THE FUTURE OF CYBER SECURITY

CLOUD • MOBILE • THREAT PREVENTION



Check Point
SOFTWARE TECHNOLOGIES LTD.

WWW.CHECKPOINT.COM

©2017 Check Point Software Technologies Ltd. All rights reserved.

Check Point and Check Point logo are trademarks or registered trademarks of Check Point Software Technologies Ltd. or its affiliates. All other product names mentioned herein are trademarks or registered trademarks of their respective owners. The products described in this document are protected by U.S. Patent No. 5,606,668, 5,835,726, 6,496,935, 6,873,988, and 6,850,943 and may be protected by other U.S. Patents, foreign patents, or pending applications.

P/N: 707365