



# Check Point 12200 Appliance

Today the enterprise gateway is more than a firewall. It is a security device presented with an ever-increasing number of sophisticated threats. As an enterprise security gateway it must use multiple technologies to control network access, detect sophisticated attacks and provide additional security capabilities like data loss prevention and protection from web-based threats. The proliferation of mobile devices like smartphones and Tablets and new streaming, social networking and P2P applications requires a higher connection capacity and new application control technologies. Finally, the shift towards enterprise private and public cloud services, in all its variations, changes the company borders and requires enhanced capacity and additional security solutions.

Check Point's new appliances combine fast networking technologies with high performance multi-core capabilities—providing the highest level of security without compromising on network speeds to keep your data, network and employees secure. Optimized for the Software Blades Architecture, each appliance is capable of running any combination of Software Blades—providing the flexibility and the precise level of security for any business at every network location by consolidating multiple security technologies into a single integrated solution.

Each Check Point Appliance supports the Check Point 3D security vision of combining policies, people and enforcement for unbeatable protection and is optimized for enabling any combination of the following Software Blades: (1) Firewall, (2) VPN, (3) IPS, (4) Application Control, (5) Mobile Access, (6) DLP, (7) URL Filtering, (8) Antivirus, (9) Anti-spam, (10) Anti-Bot, (11) Identity Awareness and (12) Advanced Networking & Clustering.

## OVERVIEW

The Check Point 12200 Appliance is a datacenter-grade platform ideally suited for securing advanced internal networks and large networks as a perimeter gateway. Its Multi-core security technology and high port density provide superior price performance on key investment criteria such as price-per-port and price-per-GB, all in a one rack unit (1RU) security appliance.

The 12200 Appliance's flexible modular interface design supports eight onboard 1 Gigabit copper Ethernet ports and with one expansion slot, an additional four or eight 1 Gigabit copper Ethernet ports, two or four 1 Gigabit fiber Ethernet ports or two or four 10 Gigabit fiber Ethernet ports.

With 738 SPU Units, the 12200 Appliance offers superior performance for its class with a firewall throughput of 15 Gbps and IPS throughput of 8 Gbps.

## KEY FEATURES

- 738 SecurityPower™
- 15 Gbps of firewall throughput
- 8 Gbps of IPS throughput
- High port density with up to 16 ports
- Optional power supplies and HDD
- Lights-Out-Management

## KEY BENEFITS

- Datacenter-grade appliance optimized for multiple Software Blades performance
- All-inclusive security appliance
- Simplifies administration with a single integrated management console
- Extensible Software Blade Architecture
- Ensures data security for remote access and site-to-site communications

## GATEWAY SOFTWARE BLADES


	12207	12208	12209	12210
Firewall	■	■	■	■
IPsec VPN	■	■	■	■
Identity Awareness	■	■	■	■
Mobile Access (5 users)	■	■	■	■
Advanced Networking & Clustering	■	■	■	■
IPS	■	■	■	■
Application Control	■	■	*	■
DLP	*	■	*	*
URL Filtering	*	*	■	■
Antivirus	*	*	■	■
Anti-spam	*	*	*	■
Anti-Bot	*	*	■	*

\* Optional



## 12200

- ① One network card expansion slot
- ② Lights Out Management card
- ③ 8 x 10/100/1000Base-T
- ④ Two USB ports for ISO installation
- ⑤ Console port RJ45
- ⑥ Graphic LCD display for management IP address and image management
- ⑦ One AC power supply
- ⑧ Second redundant hot-swappable AC power supply (optional)
- ⑨ 4 GB RAM upgrade (optional)
- ⑩ 500 GB hard drive
- ⑪ Second hot-swappable 500 GB RAID-1 hard drive (optional)
- ⑫ Slide rails

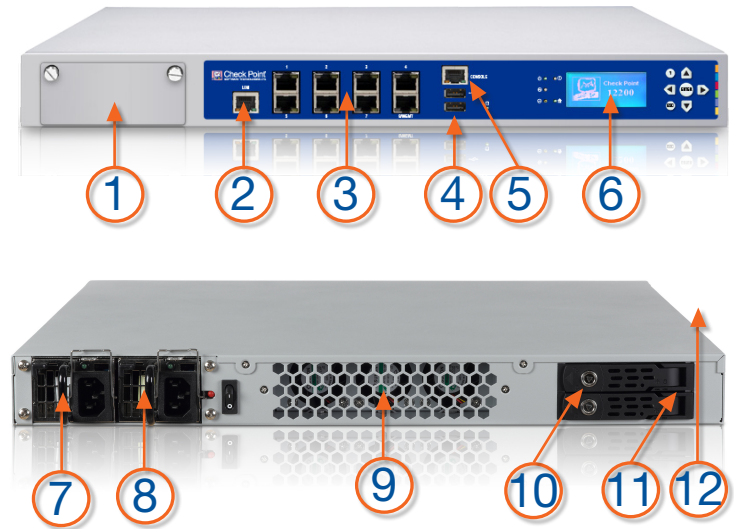

## SECURITYPOWER™

Until today security appliance selection has been based upon selecting specific performance measurements for each security function, usually under optimal lab testing conditions and using a security policy that has one rule. Today customers can select security appliances by their SecurityPower™ ratings which are based on real-world customer traffic, multiple security functions and a typical security policy.

SecurityPower is a new benchmark that measures the capability and capacity of an appliance to perform multiple advanced security functions (Software Blades) such as IPS, DLP and Application Control in real world traffic conditions. This provides an effective metric to better predict the current and future behavior of appliances under security attacks and in day-to-day operations. Customer SecurityPower Unit (SPU) requirements, determined using the Check Point Appliance Selection Tool, can be matched to the SPU ratings of Check Point Appliances to select the right appliance for their specific requirements.

## BUSINESS CONTINUITY, RELIABILITY AND EXTENSIBILITY

The Check Point 12200 appliance delivers business continuity and serviceability through features such as hot-swappable redundant power supplies, hot-swappable redundant hard disk drives (RAID) and an advanced LOM card for out-of-band management. Combined together, these features ensure a greater degree of business continuity and serviceability when these appliances are deployed in customer's networks.

## INTEGRATED SECURITY MANAGEMENT

The appliance can either be managed locally with its available integrated security management or via central unified management. Using local management, the

appliance can manage itself and one adjacent appliance for high availability purposes.

## REMOTE PLATFORM MANAGEMENT AND MONITORING

A Lights-Out-Management (LOM) card provides out-of-band remote management to remotely diagnose, start, restart and manage the appliance from a remote location. Administrators can also use the LOM web interface to remotely install an OS image from an ISO file.

## GAiA – THE UNIFIED SECURITY OS

Check Point GAiA™ is the next generation Secure Operating System for all Check Point appliances, open servers and virtualized gateways. GAiA combines the best features from IPSO and SecurePlatform into a single unified OS providing greater efficiency and robust performance. By upgrading to GAiA, customers will benefit from improved appliance connection capacity and reduced operating costs. With GAiA, customers will gain the ability to leverage the full breadth and power of all Check Point Software Blades. GAiA secures IPv4 and IPv6 networks utilizing the Check Point Acceleration & Clustering technology and it protects the most complex network environments by supporting dynamic routing protocols like RIP, OSPF, BGP, PIM (sparse and dense mode) and IGMP. As a 64-Bit OS, GAiA increases the connection capacity of select appliances.

GAiA simplifies management with segregation of duties by enabling role-based administrative access. Furthermore, GAiA greatly increases operation efficiency by offering Automatic Software Updates. The intuitive and feature-rich Web interface allows for instant search of any commands or properties. GAiA offers full compatibility with IPSO and SecurePlatform command line interfaces, making it an easy transition for existing Check Point customers.



## TECHNICAL SPECIFICATIONS

Base Configuration
8 x 10/100/1000Base-T RJ45 ports
One network card expansion slot
4 GB memory
1 x 500GB HDD
One AC power supply
LOM card
Slide rails (22" to 32")
Network Expansion Options (1 slot)
4 x 10/100/1000Base-T RJ45 ports
8 x 10/100/1000Base-T RJ45 ports
2 x 1000Base-F SFP ports
4 x 1000Base-F SFP ports
2 x 10GBase-F SFP ports
4 x 10GBase-F SFP ports
4 x 10/100/1000Base-T Fail-Open NIC
4 x 1000Base-F SX or LX Fail-Open NIC
2 x 10GBase-F SR or LR Fail-Open NIC
Max Configuration
16 x 10/100/1000Base-T RJ45 ports
8 x 10/100/1000Base-T RJ45 + 4 x 1000Base-F SFP ports
8 x 10/100/1000Base-T RJ45 + 4 x 10GBase-F SFP+ ports
2 x 500 GB HDD RAID-1
12 GB memory
Two redundant hot-swappable power supplies
Performance
738 SecurityPower <sup>1</sup>
15 Gbps of firewall throughput, 1518 byte UDP
2.5 Gbps of VPN throughput, AES-128
8 Gbps of IPS throughput Default IPS profile
2.5 Gbps of IPS throughput Recommended IPS profile
1.7 (default) / 5 (max) million concurrent connections
90,000 connections per second

<sup>1</sup> SecurityPower: A metric to measure appliance performance based on real world traffic given the deployed software blades. Find the right appliance for your performance and security needs.

Network Connectivity
IPv4 and IPv6
1024 VLANs
256 VLANs per interface
802.3ad passive and active link aggregation
Layer 2 (transparent) and Layer 3 (routing) mode
High Availability
Active/Active - L3 mode
Active/Passive - L3 mode
Session synchronization for firewall and VPN
Session failover for routing change
Device failure detection
Link failure detection
ClusterXL or VRRP
Virtual Systems
Max VSs: 20 (w/4GB), 50 (w/12GB)
Dimensions
Enclosure:1RU
Standard: 17.25 x 16.14 x 1.73 in.
Metric: 438 x 410 x 44 mm
Weight: 7.6 kg (16.76 lbs.)
Power Requirements
AC Input Voltage: 110-240V
Frequency: 47-63Hz
Single Power Supply Rating: 275 W
Power Consumption Maximum: 121 W
Maximum Thermal Output: 412.9 BTU
Operating Environmental Conditions
Temperature: 32° to 104°F / 0° to 40°C
Humidity: 20%- 90% (non-condensing)
Storage Conditions
Temperature: -4° to 158°F / -20° to 70°C
Humidity: 5% to 95% @60°C
Certifications
Safety: CB, UL/cUL, CSA, TUV, NOM, CCC, IRAM, PCT/GoST
Emissions: FCC, CE, VCCI, C-Tick, CCC, ANATEL, KCC
Environmental: RoHS



## SOFTWARE BLADE PACKAGES SPECIFICATIONS

Base Systems <sup>1</sup>	SKU
12200 Appliance with 7 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control blades). Bundled with local management for up to 2 gateways.	CPAP-SG12207
12200 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades). Bundled with local management for up to 2 gateways.	CPAP-SG12208
12200 Appliance with 9 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, URL Filtering, Antivirus and Anti-Bot Security blades); bundled with local management for up to 2 gateways	CPAP-SG12209
12200 Appliance with 10 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Antivirus, and Email Security blades). Bundled with local management for up to 2 gateways.	CPAP-SG12210
Software Blades Packages <sup>1</sup>	SKU
Check Point Extended Security Software Blades Package for 1 year for 12200 appliance (including IPS, URL Filtering, Application Control, Antivirus, Email Security, and DLP blades).	CPSB-ESEC-6B-12200-1Y
Check Point UTM+ Software Blades Package for 1 year for 12200 appliance (including IPS, URL Filtering, Application Control, Antivirus, and Email Security blades)	CPSB-UTMP-5B-12200-1Y
Check Point Threat Prevention Software Blades Package for 1 year for 12200 (including IPS, Anti-Bot, URL Filtering and Antivirus blades)	CPSB-TPRV-4B-12200-1Y
Check Point Extended Threat Protection Software Blades Package for 1 year for 12200 (including Application Control and IPS blades)	CPSB-ETPR-2B-12200-1Y
Check Point DLP+ Software Blades Package for 1 year for 12200 appliance (including IPS, Application Control, and DLP)	CPSB-DLPP-3B-12200-1Y
Check Point Web Control Software Blades Package for 1 year for 12200 (including Application Control and URL Filtering blades)	CPSB-WBCL-2B-12200-1Y
Check Point Anti-Malware Package for 1 year for 12200 (including Anti-Bot and AV blades)	CPSB-ABAV-2B-12200-1Y
Additional Software Blades <sup>1</sup>	SKU
Check Point Mobile Access Blade for up to 200 concurrent connections	CPSB-MOB-200
Data Loss Prevention Blade for 1 year (for 500 to 1,500 users, up to 50,000 mails per hour and max throughput of 1.5 Gbps)	CPSB-DLP-1500-1Y
Check Point IPS blade for 1 year	CPSB-IPS-M-1Y
Check Point Application Control blade for 1 year	CPSB-APCL-M-1Y
Check Point URL Filtering blade for 1 year	CPSB-URLF-M-1Y
Check Point Antivirus Blade for 1 year	CPSB-AV-M-1Y
Check Point Anti-Spam & Email Security Blade for 1 year	CPSB-ASPM-1Y
Check Point Anti-Bot Blade for 1 year - for mid appliances and pre-defined systems	CPSB-ABOT-M-1Y

<sup>1</sup>SKUs for 2 and 3 years are available, see the online Product Catalog.

## VIRTUAL SYSTEMS PACKAGES

Description	SKU
50 Virtual Systems package	CPSB-VS-50
50 Virtual Systems package for HA/VSLs	CPSB-VS-50-VSLs
25 Virtual Systems package	CPSB-VS-25
25 Virtual Systems package for HA/VSLs	CPSB-VS-25-VSLs
10 Virtual Systems package	CPSB-VS-10
10 Virtual Systems package for HA/VSLs	CPSB-VS-10-VSLs



**ACCESSORIES**

<b>Interface Cards and Transceivers</b>	<b>SKU</b>
4 Port 10/100/100 Base-T RJ45 interface card	CPAC-4-1C
8 Port 10/100/100 Base-T RJ45 interface card	CPAC-8-1C
4 Port 1000Base-F SFP interface card. Requires additional 1000Base SFP transceiver modules per interface port	CPAC-4-1F
SFP transceiver module for 1G fiber ports – long range (1000Base-LX) for CPAC-4-1F	CPAC-TR-1LX
SFP transceiver module for 1G fiber ports – short range (1000Base-SX) for CPAC-4-1F	CPAC-TR-1SX
2 Port 10GBase-F SFP+ interface card. Requires an additional 10GBase SFP+ transceiver per interface port	CPAC-2-10F
4 Port 10GBase-F SFP+ interface card. Requires an additional 10GBase SFP+ transceiver per interface port	CPAC-4-10F
SFP+ transceiver module for 10G fiber ports – long range ( 10GBase-LR) for CPAC-2-10F, CPAC-4-10F	CPAC-TR-10LR
SFP+ transceiver module for 10G fiber ports – short range ( 10GBase-SR) for CPAC-2-10F, CPAC-4-10F	CPAC-TR-10SR
<b>Bypass Card</b>	<b>SKU</b>
2 Port 10GE short-range Fiber Bypass (Fail-Open) Network interface card (10000Base-SR)	CPAC-2-10FSR-BP
2 Port 10GE long-range Fiber Bypass (Fail-Open) Network interface card (10000Base-LR)	CPAC-2-10FLR-BP
4 Port 1GE short-range Fiber Bypass (Fail-Open) Network interface card (1000Base-SX)	CPAC-4-1FSR-BP
4 Port 1GE long-range Fiber Bypass (Fail-Open) Network interface card (1000Base-LX)	CPAC-4-1FLR-BP
4 Port 1GE copper Bypass (Fail-Open) Network interface card (10/100/1000 Base-T)	CPAC-4-1C-BP
<b>Spares and Miscellaneous</b>	<b>SKU</b>
4GB RAM Memory upgrade for 12200 appliances	CPAC-RAM4GB
Additional/replacement AC Power Supply for 12200 appliance	CPAC-PSU-12200
Additional/replacement 500G Hard Disk Drive for 12200 appliance	CPAC-HDD-500G-12200
Replacement parts kit (including 1 Hard Disk Drive, and one Power Supply) for 12200 appliance	CPAC-SPARES-12200
Slide RAILS for 4000 and 12000 Appliances (22"-32")	CPAC-RAILS
Extended Slide Rails for 4000 and 12000 Appliances (26"-36")	CPAC-RAILS-EXT

**CONTACT CHECK POINT**
**Worldwide Headquarters**

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

**U.S. Headquarters**

959 Skyway Road, Suite 300, San Carlos, CA 94070 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com