



Safe@Office 1000N Series

Proven network security
for small business

Security Gateways

Small Business—Safe@Office 1000N Series

OVERVIEW

Check Point Safe@Office® UTM appliances deliver proven, cost effective and best-in-class security-right out of the box! These simple, all-in-one appliances allow small businesses to deploy comprehensive security quickly and easily. Safe@Office appliances integrate firewall, IPS, anti-malware, URL Filtering and more. Safe@Office appliances integrate with the Security Management Portal, which features an intuitive Web-based user interface and uses robust and resilient architecture to support the management of up to tens of thousands of Check Point Safe@Office gateways.

AVAILABLE MODELS

There are four models available in the Safe@Office 1000N Series:

- 1000N (wired-only connectivity)
- 1000NW (includes 802.11b/g/n wireless)
- 1000N ADSL (wired-only connectivity with ADSL WAN port)
- 1000NW ADSL (802.11b/g/n wireless with ADSL WAN port)


BASE CONFIGURATION

- LAN Switch: 4 ports of 10/100/1000 Mbps
- WAN Port: 1 10/100/1000 Mbps (non-ADSL models)
or 1 RJ-11 ADSL port (ADSL models)
- DMZ/WAN2 Port: 1 10/100 Mbps
- 802.11b/g/n wireless (on wireless models)
- Console (serial) port
- USB Ports:
 - 2 (1000NW, 1000N ADSL)
 - 1 (1000NW ADSL)
 - 0 (1000N)
- SFP Port:
 - 1 (1000N ADSL)
 - 0 (other models)
- ExpressCard 3G Modem Slot:
 - 1 (ADSL models)
 - 0 (non-ADSL models)
- Wall mounting kit


BENEFITS

- Integrates enterprise-class Firewall, IPS, VPN, URL Filtering, Anti-malware and Messaging Security
- Simple Wizard-based interface allows fast and easy deployment—without the need for IT resources
- Robust 3G connectivity ensures reliable connectivity
- Built-in support for latest 802.11n WiFi standard (NW models)
- Support for ADSL annex A or B (ADSL models)
- Gigabit Firewall performance and multi-Gigabit port-density for increased bandwidth demands
- High availability and load balancing for business continuity and service availability



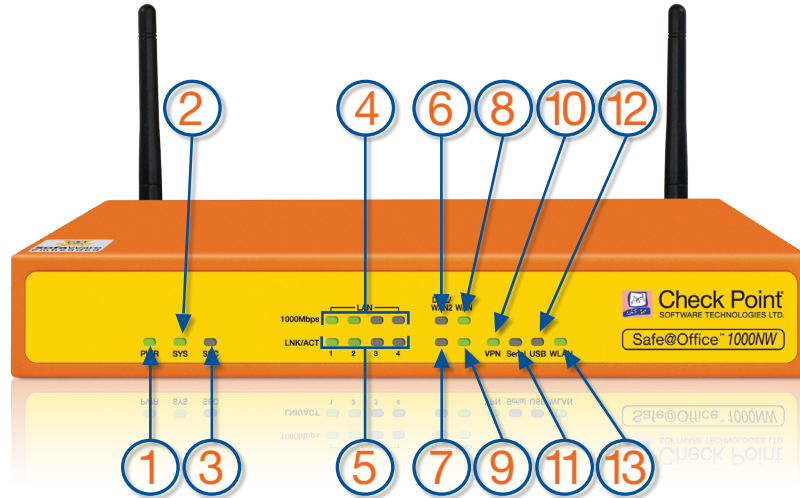

1. Power indicator
2. System status indicator
3. Security status indicator
4. 1000Mbps status light for LAN ports
5. Link activity lights for LAN ports
6. 1000Mbps status light for DMZ/WAN2 port
7. Link activity light for DMZ/WAN2 port
8. 1000Mbps status light for WAN port (non-ADSL models), data activity light for DSL WAN port (ADSL models)
9. Link activity light for WAN port (non-ADSL models), link status light for DSL WAN port (ADSL models)
10. VPN status light
11. Serial port activity light
12. USB activity light
13. WLAN activity light

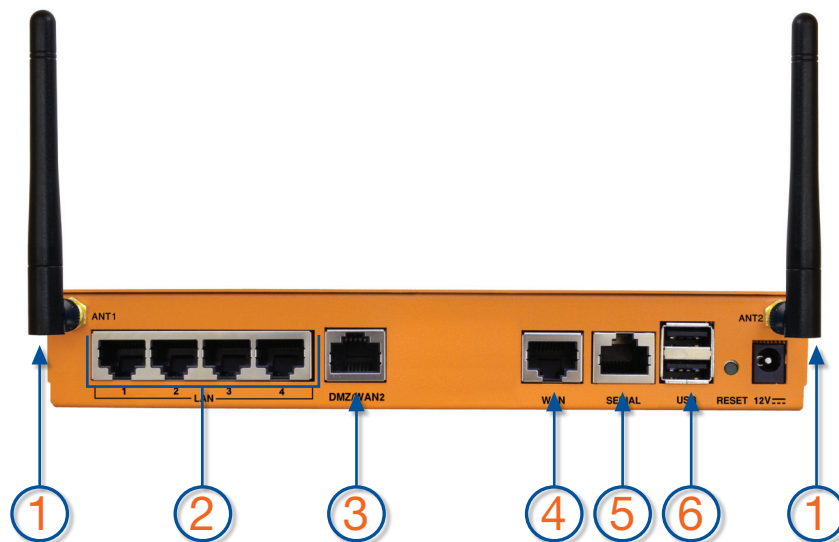

1. WLAN antennas (on wireless models)
2. 10/100 LAN ports
3. 10/100 DMZ/WAN2 port
4. 10/100 WAN port (RJ-11 DSL port on ADSL models)
5. Serial port
6. USB port(s) (on wireless and ADSL models)

Note: Ports vary based on model. Safe@Office 1000NW shown.

TECHNICAL SPECIFICATIONS

LAN/WAN/DMZ/USB Support

- 10/100/1000 Base-T (10/100/1000 Mbps Ethernet)
- 802.11b/g/n LAN (on wireless models)
- 3G modems via USB connection
- ADSL Modem (on ADSL Models): ADSL2, ADSL2+, T.1413 G.DMT (G.992.1) G.Lite (G.992.2) ANNEX A (ADSL over POTS), ANNEX B (ADSL over ISDN)

Performance

- Number of Concurrent Users: 25/unlimited
- Firewall: 1000 Mbps
- VPN: 200 Mbps

Dimensions

- Standard: 7.87 x 1.3 x 4.80 in. (wired models), 7.87 x 1.3 x 4.87 in. (wireless models)
- Metric: 200 x 33 x 122mm
- Weight: 1.45kg (3.197 lbs)

Power Requirements

- AC Input Voltage: 100-240V
- Frequency: 50/60Hz
- AC Input Current Maximum: 1.0A

Environment Operating Conditions

- Temperature: 0°C ~ 40°C (operation)
- Altitude: 10,000 ft / 3048m
- Humidity: 10%-90% (non-condensing)

Environment Non-Operating Conditions

- Temperature: -5°C ~ 80°C
- Humidity: Up to at least 95% (non-condensing)

Compliance

- Regulatory Compliance: FCC Part 15 Class B, CE, UL, EMC, RF, Safety
- Environmental Standards: RoHS, WEEE

Note: Performance data represents the maximum capabilities of the systems as measured under optimal testing conditions.

CONTACT CHECK POINT

Worldwide Headquarters

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

U.S. Headquarters

800 Bridge Parkway, Redwood City, CA 94065 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com