



Hybrid Mesh Network Security

07 September 2026

THREAT PREVENTION

R82.10

Administration Guide



Check Point Copyright Notice

© 2025 - 2026 Check Point Software Technologies Ltd.

All rights reserved. This product and related documentation are protected by copyright and distributed under licensing restricting their use, copying, distribution, and decompilation. No part of this product or related documentation may be reproduced in any form or by any means without prior written authorization of Check Point. While every precaution has been taken in the preparation of this book, Check Point assumes no responsibility for errors or omissions. This publication and features described herein are subject to change without notice.

RESTRICTED RIGHTS LEGEND:

Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 and FAR 52.227-19.

TRADEMARKS:

Refer to the [Copyright page](#) for a list of our trademarks.

Refer to the [Third Party copyright notices](#) for a list of relevant copyrights and third-party licenses.

Important Information



Latest Software

We recommend that you install the most recent software release to stay up-to-date with the latest functional improvements, stability fixes, security enhancements and protection against new and evolving attacks.



Certifications

For third party independent certification of Check Point products, see the [Check Point Certifications page](#).



Check Point R82.10

For more about this release, see the R82.10 [home page](#).



Latest Version of this Document in English

Open the latest version of this [document in a Web browser](#).
Download the latest version of this [document in PDF format](#).



Feedback

Check Point is engaged in a continuous effort to improve its documentation.
[Please help us by sending your comments](#).

Revision History

Date	Description
04 May 2026	Updated <i>"Exception Rules" on page 137</i>
05 April 2026	Updated <i>"Configuring Anti-Bot & Advanced DNS Settings" on page 77</i>
24 March 2026	Updated <i>"Configuring Autonomous Threat Prevention" on page 293</i>
19 March 2026	Updated <i>"Threat Prevention Policy Insights " on page 282</i>
12 March 2026	Updated <i>"Configuring Anti-Bot & Advanced DNS Settings" on page 77</i>
22 February 2026	Added <i>"Maximum Security for Anti-Virus and Anti-Bot" on page 88</i>
14 January 2026	Updated <i>"Threat Prevention Profiles" on page 53</i>
6 January 2026	Updated <i>"Threat Prevention Policy Insights " on page 282</i>
29 December 2025	First release of this document

Table of Contents

About This Guide	24
The Check Point Threat Prevention Solution	25
Threat Prevention Components	25
IPS	26
Anti-Bot & Advanced DNS	27
Anti-Virus	28
SandBlast	29
Threat Emulation	29
Threat Extraction	30
Zero Phishing	31
Custom Threat Prevention	34
Getting Started with Custom Threat Prevention	35
Using Cloud Emulation	38
Disabling the Threat Prevention Blades	42
Monitoring	42
The Threat Prevention Policy	43
Workflow for Creating a Threat Prevention Policy	43
Assigning Administrators for Threat Prevention	43
To Learn More about Policy Packages	43
Threat Prevention Policy Layers	44
Action Enforcement in Multiple-Layered Security Policies	44
Creating a New Policy Layer	46
Threat Prevention Layers in Pre-R80 Gateways	47
Threat Prevention Rule Base	47
Parts of the Rules	47
Number (No.)	47
Name	48

Protected Scope	48
Traffic Direction and Interface Type Settings	48
Using Protected Scope with SPAN and TAP Configurations	49
Limitations and Troubleshooting	49
Protection	50
Action	50
Threat Prevention Track Options	51
Install On	51
Concurrent Install Policy	52
Threat Prevention Profiles	53
Introducing Profiles	53
Optimized Protection Profile Settings	54
Profiles Pane	54
Creating Profiles	56
Cloning Profiles	57
Editing Profiles	57
Deleting Threat Prevention Profiles	58
Viewing Changes to a Threat Prevention Profile	58
Assigning Profiles to Security Gateways	59
Configuring the Threat Prevention Profile and Rules	60
Configuring Mail Settings	60
General	60
Use Case	62
Exceptions	62
Signed Email Attachments	64
MIME Nesting	64
Configuring IPS Profile Settings	65
Additional Activation Fields	66
Updates	66
Pre-R80 Settings	67

Configuring IPS Protections for Custom Threat Prevention	67
Protection Browser	67
Exporting the IPS Protections View	68
Protection Types	69
Browsing IPS Protections	69
Updating IPS Protections	70
Scheduling IPS Updates	71
Reverting to an Earlier IPS Protection Package	71
Reviewing New Protections	71
Activating Protections	72
Activating Protections for All Profiles	72
Editing Protections for a Specific Profile	72
Removing Activation Overrides	73
Editing Core IPS Protections	74
IPS Protections Follow Up	74
Manually Marking Protections for Follow Up	75
Automatically Marking New Protections for Follow Up	75
Configuring Anti-Bot & Advanced DNS Settings	77
Configure Advanced DNS Settings	77
Configuring a Malware DNS Trap	78
Malware Prevention Using IP and Port Indicators	80
Known Limitations	80
How to Enable Malware Prevention Using IP and Port Indicators	80
How to Disable Malware Prevention Using IP and Port Indicators	81
Troubleshooting	83
Configuring Anti-Virus Settings	85
Enabling Archive Scanning	87
Additionally Supported Protocols for Anti-Virus	88
Maximum Security for Anti-Virus and Anti-Bot	88
Improved Behavior	89

The Threat Emulation Solution	90
Getting Started with Threat Emulation	90
Using Cloud Emulation	91
ThreatCloud Emulation	92
Threat Emulation Analysis Locations	93
Local or Remote Emulation	93
Selecting the Threat Emulation Deployment	95
Inline Deployments	96
Monitor (SPAN/TAP) Deployments	96
Threat Emulation Deployments with a Mail Transfer Agent	97
Configuring Threat Emulation Settings on the Security Profile	98
Threat Emulation General Settings	99
Threat Emulation Environment	101
Threat Emulation Advanced Settings	101
Selecting an Emulation connection handling mode when Threat Extraction is disabled	102
Selecting an Emulation connection handling mode when Threat Extraction is enabled	102
Use Case	103
Configuring Threat Emulation location	103
Configuring Threat Emulation on the Security Gateway - Custom Threat Prevention	105
Changing the Analysis Location	105
Setting the Activation Mode	106
Optimizing System Resources	106
Managing Images for Emulation	108
Additionally Supported Protocols for Threat Emulation	108
Configuring Advanced Threat Emulation Settings - Custom Threat Prevention	110
Updating Threat Emulation	110
Updating Threat Emulation Images Manually	111
Fine-Tuning the Threat Emulation Appliance	111

Configuring the Emulation Limits	111
Changing the Size of the Local Cache	112
Configuring Threat Extraction Settings	114
Threat Extraction General Settings	114
Threat Extraction Advanced Settings	117
Scenario 1: Excluding senders from scanning	118
Scenario 2: Allowing digitally signed emails without scanning	119
Scenario 3: Changing the Extraction Method	119
Configuring Threat Extraction on the Security Gateway - Custom Threat Prevention	120
Threat Extraction and Endpoint Security	121
Configuring Threat Extraction in a Cluster	121
Threat Extraction Statistics	122
Using the Gateway CLI	122
Storage of Original Files	124
Backup to External Storage	125
Configuring Zero Phishing Settings - Custom Threat Prevention	127
Configuring Zero Phishing UserCheck Settings	128
Configuring Zero Phishing Exceptions	128
Configuring Zero Phishing on the Security Gateway	129
Accessibility	129
Zero Phishing enforcement for HTTPS traffic based on SNI	129
HTML Smuggling Protection	131
Activating HTML Smuggling Protection	131
Disabling the HTML Smuggling Protection	131
HTML Smuggling Allow List	132
Threat Prevention Protections Browser	132
Threat Prevention Policy Insights	133
Supported Environments	133
Limitations	133

Prerequisites	134
Activating Threat Prevention Policy Insights	134
Types of Insights	134
Managing Threat Prevention Policy Insights	135
Confidence Level	135
Severity	135
Available Actions	135
Filtering Insights	136
Exception Rules	137
Disabling a Protection on One Server	138
Creating an Exception for a Specific Protection, Site, File or Blade	139
Creating Exceptions from Logs or Events	143
Exception Groups	144
Creating Exception Groups	145
Configuring Advanced Threat Prevention Settings	147
Threat Prevention Engine Settings - Custom Threat Prevention	147
Fail Mode	147
Check Point Online Web Service	148
Connection Unification	149
Configuring Anti-Bot Whitelist	150
Selecting Emulation File Types	150
Configuring Advanced Engine Settings for Threat Extraction	150
Snort Signature Support	152
Importing SNORT Protection Rules to the Security Management Server	152
Deleting SNORT Protection Rules from the Security Management Server	153
Importing SNORT Protection Rules to the Multi-Domain Server	154
Deleting SNORT Protection Rules from the Multi-Domain Server	156
Action on SNORT Protection Rules	157
Alternative Methods to add and delete SNORT Protection Rules	159
Adding SNORT Rules	159

Deleting SNORT Protections	161
Creating SNORT Rule Files	162
Supported SNORT Syntax	163
Unsupported SNORT Syntax	165
SSL Services	167
Optimizing IPS - Custom Threat Prevention	168
Troubleshooting IPS on a Security Gateway	168
Managing Performance Impact	168
Adaptive IPS	168
Tuning Protections	170
IPS Policy Settings	170
Focus on High Severity Protections	170
Focus on High Confidence Level Protections	170
Focus on Low Performance Impact Protections	170
Using the Allow List	171
Configuring Threat Prevention Settings on VSX Gateways	173
Configuring the Security Gateway as a Mail Transfer Agent	178
Enabling Mail Transfer Agent	178
Disabling Mail Transfer Agent	183
Deploying MTA in Backward Compatibility Mode	184
MTA Engine Updates	185
Monitoring MTA	186
ICAP	190
Security Gateway as ICAP Client	193
Use Cases	193
Limitations	193
ICAP Decisions	193
Example Data Flow in the Request Modification (REQMOD) Mode	194
Example Data Flow in Server Response Modification (RESPMOD) Mode	196
Limitations	197

ICAP Client Functionality	198
ICAP Client User Disclaimer	200
Getting Started with ICAP Client	201
Configuring ICAP Client in VSX mode	203
The ICAP Client Configuration File	205
Example of the ICAP Client Configuration File	218
Advanced ICAP Client Configuration	222
Configuring Additional ICAP Response Headers for Enforcement	223
Description	223
Default HTTP Response X-Headers	223
Additional HTTP Response X-Headers	228
Configuring the Additional HTTP Response X-Headers	230
Configuring Additional HTTPS Status Code, which ICAP Client Sends in RESPMOD	233
Description	233
Configuring the HTTP Server Status Codes	233
Configuring Connection Timeout for ICAP Connections	236
Description	236
Configuring the Connection Timeout	236
Additional Information	236
Configuring ICAP Client Data Trickling Parameters	238
Description	238
Trickle from the Start mode	238
Trickle at the End mode	238
Notes about Data Trickling on Check Point Security Gateways	239
Configuring ICAP Client Data Trickling	240
The Security Gateway as an ICAP Server	242
ICAP Server Actions	242
ICAP Server Workflow	243
Getting Started with ICAP Server	245

Related Configuration on the ICAP Client	251
Use Case	251
Monitoring Threat Prevention - Custom Threat Prevention	254
Log Sessions	254
Using the Log View	254
Viewing Threat Prevention Rule Logs	256
Predefined Queries	256
Creating Custom Queries	256
Selecting Criteria from Grid Columns	257
Manually Entering Query Criteria	257
Selecting Query Fields	257
Packet Capture	258
Advanced Forensics Details	259
Threat Analysis in the Logs & Events View	259
Views	260
Reports	261
Log Fields	261
How to Investigate Threat Prevention Events	261
Threat Prevention Scheduled Updates - Custom Threat Prevention	262
Introduction to Scheduled Updates	262
Configuring Threat Prevention Scheduled Updates	262
Checking Update Status	263
Turning Off IPS Automatic Updates on a Gateway	264
IPS Updates Use Cases	264
SSH Deep Packet Inspection - Custom Threat Prevention	266
SSH DPI Architecture	266
Enabling SSH Deep Packet Inspection on the Security Gateway	266
Disabling SSH Deep Packet Inspection on the Security Gateway	267
Viewing SSH DPI Status	267
Configuring SSH Deep packet Inspection	267

SSH Deep Packet Inspection Settings	270
Client Authorization (authorization by keys - without passwords)	271
Cluster	271
Troubleshooting	272
Debugging	272
The Check Point ThreatCloud - Custom Threat Prevention	274
Configuring Check Point ThreatCloud on a Gateway	275
Check Point ThreatCloud Network	276
Troubleshooting - Custom Threat Prevention	277
Troubleshooting the Threat Extraction Blade	277
Troubleshooting Threat Emulation	281
Using MTA with ClusterXL	281
Configuring Postfix for MTA	281
Problems with Email Emulation	282
Troubleshooting IPS for a Security Gateway	282
Threat Prevention Policy Insights	282
Supported Environments	283
Limitations	283
Prerequisites	283
Activating Threat Prevention Policy Insights	283
Types of Insights	284
Managing Threat Prevention Policy Insights	284
Confidence Level	285
Severity	285
Available Actions	285
Filtering Insights	285
Autonomous Threat Prevention	287
Getting Started with Autonomous Threat Prevention	289
Monitoring	289
Autonomous Threat Prevention Profiles	289

Configuring Autonomous Threat Prevention	293
Limitations	293
Configuration	293
Deployment	295
File Protections	296
Settings	297
Sanitized File Settings	297
Advanced Settings	297
Clearing NGTX Expiration Alerts in SmartConsole	297
Configuring Threat Emulation on the Security Gateway - Autonomous Threat Prevention	299
Preparing for Local or Remote Emulation	299
Changing the Analysis Location	299
Setting the Activation Mode	300
Optimizing System Resources	301
Managing Images for Emulation	302
Configuring Threat Extraction on the Security Gateway - Autonomous Threat Prevention	303
Threat Extraction and Endpoint Security	303
Configuring Threat Extraction in a Cluster	304
Threat Extraction Statistics	304
Using the Security Gateway CLI	304
Storage of Original Files	306
Backup to External Storage	307
Configuring Zero Phishing Settings in Autonomous Threat Prevention	309
Zero Phishing and Unclassified Sites	311
Zero Phishing Exceptions	311
Zero Phishing enforcement for HTTPS traffic based on SNI	312
HTML Smuggling Protection	313
Activating HTML Smuggling Protection	314
Disabling the HTML Smuggling Protection	314

HTML Smuggling Allow List	314
Configuring Advanced Threat Prevention Settings	315
Threat Prevention Engine Settings - Autonomous Threat Prevention	315
Fail Mode	315
Check Point Online Web Service	317
Connection Unification	318
Configuring Anti-Bot Whitelist	318
File Type Support for Threat Emulation and Threat Extraction	318
Optimizing IPS - Autonomous Threat Prevention	318
Managing Performance Impact	319
Adaptive IPS	319
Configuring Advanced Threat Emulation Settings - Autonomous Threat Prevention	321
Updating Threat Emulation	321
Updating Threat Emulation Images Manually	322
Fine-Tuning the Threat Emulation Appliance	322
Configuring the Emulation Limits	323
Changing the Size of the Local Cache	323
Threat Prevention Scheduled Updates - Autonomous Threat Prevention	324
Introduction to Scheduled Updates	324
Configuring Threat Prevention Scheduled Updates	324
Checking Update Status	325
Turning Off IPS Automatic Updates on a Gateway	326
IPS Updates Use Cases	326
SSH Deep Packet Inspection - Autonomous Threat Prevention	327
SSH DPI Architecture	327
Enabling SSH Deep Packet Inspection on the Security Gateway	328
Disabling SSH Deep Packet Inspection on the Security Gateway	328
Viewing SSH DPI Status	328
Configuring SSH Deep packet Inspection	329
SSH Deep Packet Inspection Settings	331

Client Authorization (authorization by keys - without passwords)	332
Cluster	332
Troubleshooting	333
Debugging	333
The Check Point ThreatCloud - Autonomous Threat Prevention	334
Configuring Check Point ThreatCloud on a Gateway	335
Check Point ThreatCloud Network	336
Autonomous Threat Prevention Overview Section	337
Monitoring Threat Prevention - Autonomous Threat Prevention	339
Log Sessions	339
Using the Log View	340
Predefined Queries	342
Creating Custom Queries	342
Selecting Criteria from Grid Columns	343
Manually Entering Query Criteria	343
Selecting Query Fields	343
Packet Capture	344
Advanced Forensics Details	344
Threat Analysis in the Logs & Events View	345
Views	345
Reports	346
Log Fields	347
How to Investigate Threat Prevention Events	347
Troubleshooting - Autonomous Threat Prevention	347
Troubleshooting the Threat Extraction Blade	347
Troubleshooting IPS for a Security Gateway	350
Common Features in Custom Threat Prevention and Autonomous Threat Prevention	351
Using Anti-Spam and Mail	352
Introduction to Anti-Spam and Mail Security	352

Mail Security Overview	352
Anti-Spam	353
Adaptive Continuous Download	353
Configuring Anti-Spam	353
Configuring a Content Anti-Spam Policy	353
Configuring an IP Reputation Policy	354
Configuring a Block List	355
Configuring Anti-Spam SMTP	356
Configuring Anti-Spam POP3	357
Configuring Network Exceptions	357
Configuring an Allow List	358
Selecting a Customized Server	358
Bridge Mode and Anti-Spam	359
Configuring a Disclaimer	359
Anti-Spam Logging and Monitoring	360
Threat Prevention API	361
What is the Threat Prevention Web API?	361
Using the Local Threat Extraction Web API	361
HTTPS Inspection	363
Limitations	363
Intercepting HTTPS Connections	364
Outbound HTTPS Inspection	364
Inbound HTTPS Inspection	365
Getting Started with HTTPS Inspection	366
HTTPS Inspection Policy	367
Configuring HTTPS Inspection Policy	369
HTTPS Inspection Policy Enforcement	370
Working with Inbound CA Certificates	371
Assigning a Server Certificate for Inbound HTTPS Inspection	371
Configuring HTTPS Inspection on the Security Gateway	372

HTTPS Inspection Deployment View	375
Working with Outbound CA Certificates	376
Creating an Outbound CA Certificate	376
Importing an Outbound CA Certificate	377
Exporting and Deploying the Generated CA Certificate	379
Deploying Certificates using Group Policy	380
Exporting a Certificate from one Security Management Server to Another	380
Working with Trusted CAs for Outbound HTTPS Inspection	382
HTTPS Inspection Global Settings	384
Fail Mode	384
Categorization Mode	384
Server Validations	385
Certificate Blocking	386
Bypass Allow Lists	387
Session Logs	387
Other	388
Intermediate CA	388
Bypass Under Load Logging	388
HTTPS Inspection Statistics View	389
Configuration	389
Viewing HTTPS Inspection Statistics	389
SNI support for Site Categorization	391
HTTPS Inspection on Non-Standard Ports	391
Inspection of TLS v1.3 Traffic	391
Inspection of HTTP/3 protocol (RFC 9114)	392
Limitations	392
Using HTTPS/3 the in a Rule Base	392
Monitoring the HTTP/3 inspection	393
Configuring Threat Indicators	398
Importing Threat Indicator Files through SmartConsole	399

Importing External Custom Intelligence Feeds	401
Importing External Custom Intelligence Feeds in CLI	402
Feed's Resource	402
'ioc_feeds' CLI Commands for Managing External Custom Intelligence Feeds	403
CSV Check Point and STIX Formats	408
Custom CSV Format	413
Snort Format	415
Snort Rule Syntax	415
Supported SNORT Syntax	416
Unsupported SNORT Syntax	418
SSL Services	419
Importing External Custom Intelligence Feeds in SmartConsole	421
Watch the video	423
UserCheck in the Threat Prevention Policy	424
Configuring UserCheck	426
UserCheck Interaction Objects for Threat Prevention Software Blades	430
UserCheck Interaction Action Types	430
Default UserCheck Interaction Objects for Threat Prevention	431
Creating New UserCheck Interaction Objects for Threat Prevention	431
Selecting "Approved" and "Cancel" UserCheck Messages	436
Send Email Notifications in Plain Text	437
Localizing and Customizing the UserCheck Portal	439
Send Email Notifications in Plain Text	439
Localizing and Customizing the UserCheck Portal	440
Cyber Attack View - Gateway	441
Main Screen - SmartConsole	442
Main Screen - SmartView	444
Default Query	446
Default widgets	447
Editing the View and Widgets	448

Working with Widgets	451
Infected Hosts	453
Description	453
Drill-Down View	453
Available Widgets	454
Widget Query	455
Best Practices	455
Timeline of Infected Hosts	457
Description	457
Widget Query	457
Attacks Allowed By Policy	458
Users that Received Malicious Emails (Attacks Allowed By Policy)	459
Description	459
Drill-Down View	459
Available Widgets	459
Widget Query	461
Best Practices	461
Hosts that Downloaded Malicious Files (Attacks Allowed By Policy)	462
Description	462
Drill-Down View	462
Available Widgets	463
Widget Query	463
Best Practices	464
Directly Targeted Hosts (Attacks Allowed By Policy)	465
Description	465
Drill-Down View	465
Available Widgets	465
Widget Query	467
Best Practices	468
Host Scanned by Attackers (Attacks Allowed By Policy)	470

Description	470
Drill-Down View	470
Available Widgets	470
Widget Query	471
Best Practices	472
Hosts that Accessed Malicious Sites (Attacks Allowed By Policy)	473
Description	473
Drill-Down View	473
Available Widgets	473
Widget Query	474
Best Practices	474
Attacks Prevented By Policy	476
Users that Received Malicious Emails (Prevented Attacks)	477
Description	477
Drill-Down View	477
Available Widgets	478
Widget Query	479
Best Practices	479
Hosts that Downloaded Malicious Files (Prevented Attacks)	481
Description	481
Drill-Down View	481
Available Widgets	481
Widget Query	482
Best Practices	483
Directly Targeted Hosts (Prevented Attacks)	484
Description	484
Drill-Down View	484
Available Widgets	485
Widget Query	486
Best Practices	487

Host Scanned by Attackers (Prevented Attacks)	488
Description	488
Drill-Down View	488
Available Widgets	488
Widget Query	489
Best Practices	490
Hosts that Accessed Malicious Sites (Prevented Attacks)	491
Description	491
Drill-Down View	491
Available Widgets	491
Widget Query	492
Best Practices	492
SandBlast Threat Emulation	494
Description	494
Drill-Down View	494
Available Widgets	494
Widget Query	496
Cyber Attack Timeline	497
Description	497
Widget Query	497
MITRE ATT&CK	498
Configuring Threat Emulation Logs with MITRE ATT&CK Data	498
MITRE Logs	499
MITRE ATT&CK in SmartView	500
MITRE ATT&CK Best Practices	502
Log Fields	504
Command Line Reference	505
Working with Kernel Parameters	506
Kernel Debug	507
Glossary	508

About This Guide

There are two ways to configure Threat Prevention:

- Custom Threat Prevention - In Custom Threat Prevention, you create your own Security Policy and configure the policy rules manually.
- Autonomous Threat Prevention - Autonomous Threat Prevention includes pre-defined security profiles. When you select a security profile, the Security Policy is created automatically.

You can install either Autonomous Threat Prevention or Custom Threat Prevention on each gateway, but not both.

This guide is divided into three chapters:

- Custom Threat Prevention configuration ([*"Custom Threat Prevention" on page 34*](#)).
- Autonomous Threat Prevention configuration ([*"Autonomous Threat Prevention" on page 287*](#)).
- Common configuration - which includes configurations that are common for both Custom Threat Prevention and Autonomous Threat Prevention ([*"Common Features in Custom Threat Prevention and Autonomous Threat Prevention" on page 351*](#)

The Check Point Threat Prevention Solution

Threat Prevention Components

To challenge today's malware landscape, Check Point's comprehensive Threat Prevention solution offers a multi-layered, pre- and post-infection defense approach and a consolidated platform that enables enterprise security to detect and block modern malware.

These Threat Prevention protections are available:

- **IPS**

A complete IPS cyber security solution, for comprehensive protection against malicious and unwanted network traffic, which focuses on application and server vulnerabilities, as well as in-the-wild attacks by exploit kits and malicious attackers.

- **Anti-Bot & Advanced DNS**

Post-infection detection of bots on hosts. Prevents bot damages by blocking bot C&C (Command and Control) communications. The Anti-Bot & Advanced DNS protection is continuously updated from ThreatCloud, a collaborative network to fight cybercrime. The Anti-Bot and Advanced DNS blade discovers infections by correlating multiple detection methods.

- **Anti-Virus**

Pre-infection detection and blocking of malware at the gateway. The Anti-Virus protection is continuously updated from ThreatCloud. It detects and blocks malware by correlating multiple detection engines before users are affected.

- **SandBlast**

Protection against infections from undiscovered exploits, zero-day and targeted attacks using:

Threat Emulation

This innovative solution quickly inspects files and runs them in a virtual sandbox to discover malicious behavior. Discovered malware is prevented from entering the network. The Emulation service reports to the ThreatCloud and automatically shares the newly identified threat information with other customers.

Threat Extraction

Protection against incoming malicious content. The extraction capability removes exploitable content, including active content and embedded objects, reconstructs files to eliminate potential threats, and promptly delivers sanitized content to users to maintain business flow. To remove possible threats, Threat Extraction creates a safe copy of the file, while it inspects the original file for potential threats.

Zero Phishing

Zero Phishing prevents unknown zero-day and known phishing attacks on websites in real-time, by utilizing industry leading Machine-Learning algorithms and patented inspection technologies.

Each protection is unique. When combined, they supply a strong Threat Prevention solution. Data from malicious attacks are shared between the Threat Prevention protections and help to keep your network safe. For example, the signatures from threats that Threat Emulation identifies are added to the ThreatCloud for use by the other Threat Prevention protections.

IPS

The IPS protection delivers complete and proactive intrusion prevention. It delivers 1,000s of signatures, behavioral and preemptive protections. It gives another layer of security on top of Check Point Firewall technology. IPS protects both clients and servers, and lets you control the network usage of certain applications. The hybrid IPS detection engine provides multiple defense layers, which allows it excellent detection and prevention capabilities of known threats and in many cases future attacks as well. It also allows unparalleled deployment and configuration flexibility and excellent performance.

Elements of Protection

The IPS protection includes:

- Detection and prevention of specific known exploits
- Detection and prevention of vulnerabilities, including both known and unknown exploit tools, for example protection from specific CVEs
- Detection and prevention of protocol misuse which in many cases indicates malicious activity or potential threat. Examples of commonly manipulated protocols are HTTP, SMTP, POP, and IMAP
- Detection and prevention of outbound malware communications
- Detection and prevention of tunneling attempts. These attempts may indicate data leakage or attempts to circumvent other security measures such as web filtering

- Detection, prevention or restriction of certain applications which, in many cases, are bandwidth consuming or may cause security threats to the network, such as Peer to Peer and Instant Messaging applications
- Detection and prevention of generic attack types without any pre-defined signatures, such as Malicious Code Protector

Check Point constantly updates the library of protections to stay ahead of emerging threats.

Capabilities of IPS

The unique capabilities of the Check Point IPS engine include:

- Clear, simple management interface
- Reduced management overhead by using one management console for all Check Point products
- Integrated management with SmartConsole
- Easy navigation from business-level overview to a packet capture for a single attack
- #1 security coverage for Microsoft and Adobe vulnerabilities
- Resource throttling so that high IPS activity does not impact other Threat Prevention functionality
- Complete integration with Check Point configuration and monitoring tools in SmartConsole, to let you take immediate action based on IPS information

For example, some malware can be downloaded by a user unknowingly when he browses to a legitimate web site, also known as a drive-by-download. This malware can exploit a browser vulnerability to create a special HTTP response and sending it to the client. IPS can identify and block this type of attack even though the firewall may be configured to allow the HTTP traffic to pass.

Anti-Bot & Advanced DNS

A bot is malicious software that can infect your computer. It is possible to infect a computer when you open attachments that exploit a vulnerability, or go to a web site that results in a malicious download.

When a bot infects a computer, it does the following

- Takes control of the computer and neutralizes its Anti-Virus defenses. It is not easy to find bots on your computer; they hide and change how they look to Anti-Virus software.

- Connects to a C&C (Command and Control center) for instructions from cyber criminals. The cyber criminals, or bot herders, can remotely control it and instruct it to do illegal activities without your knowledge. Your computer can do one or more of these activities:
 - Steal data (personal, financial, intellectual property, organizational)
 - Send spam
 - Attack resources (Denial of Service Attacks)
 - Consume network bandwidth and reduce productivity

One bot can often create multiple threats. Bots are frequently used as part of **Advanced Persistent Threats** (APTs) where cyber criminals try to damage individuals or organizations.

The Anti-Bot & Advanced DNS Software Blade detects and prevents these bot and botnet threats. A botnet is a collection of compromised and infected computers.

The Anti-Bot Software Blade uses these procedures to identify bot infected computers

- Identify the C&C addresses used by criminals to control bots

These web sites are constantly changing and new sites are added on an hourly basis. Bots can attempt to connect to thousands of potentially dangerous sites. It is a challenge to know which sites are legitimate and which are not.
- Identify the communication patterns used by each botnet family

These communication fingerprints are different for each family and can be used to identify a botnet family. Research is done for each botnet family to identify the unique language that it uses. There are thousands of existing different botnet families and new ones are constantly emerging.
- Identify bot behavior

Identify specified actions for a bot such as, when the computer sends spam or participates in DoS attacks.

After the discovery of bot infected machines, the Anti-Bot & Advanced DNS Software Blade blocks outbound communication to C&C sites based on the Rule Base. This neutralizes the threat and makes sure that no sensitive information is sent out.

Anti-Virus

Malware is a major threat to network operations that has become increasingly dangerous and sophisticated. Examples include worms, blended threats (combinations of malicious code and vulnerabilities for infection and dissemination) and trojans.

The Anti-Virus protection scans incoming and outgoing files to detect and prevent these threats, and provides pre-infection protection from malware contained in these files. The Anti-Virus protection is also supported by the Threat Prevention API (see ["Threat Prevention API " on page 361](#)).

The Anti-Virus protection

- Identifies malware in the organization using the ThreatSpect engine and ThreatCloud repository:
 - Prevents malware infections from incoming malicious files types (Word, Excel, PowerPoint, PDF, etc.) in real-time. Incoming files are classified on the gateway and the result is then sent to the ThreatCloud repository for comparison against known malicious files, with almost no impact on performance.
 - Prevents malware download from the internet by preventing access to sites that are known to be connected to malware. Accessed URLs are checked by the gateway caching mechanisms or sent to the ThreatCloud repository to determine if they are permissible or not. If not, the attempt is stopped before any damage can take place.
- Uses the ThreatCloud repository to receive binary signature updates and query the repository for URL reputation and Anti-Virus classification.

SandBlast

Cyber-threats continue to multiply and now it is easier than ever for criminals to create new malware that can easily bypass existing protections. On a daily basis, these criminals can change the malware signature and make it virtually impossible for signature-based products to protect networks against infection. To get ahead, enterprises need a multi-faceted prevention strategy that combines proactive protection that eliminates threats before they reach users. With Check Point's Threat Emulation and Threat Extraction technologies, SandBlast provides zero-day protection against unknown threats that cannot be identified by signature-based technologies.

Threat Emulation

Threat Emulation gives networks the necessary protection against unknown threats in web downloads and e-mail attachments. The Threat Emulation engine picks up malware at the exploit phase, before it enters the network. It quickly quarantines and runs the files in a virtual sandbox, which imitates a standard operating system, to discover malicious behavior before hackers can apply evasion techniques to bypass the sandbox.

Threat Emulation receives files through these methods of delivery

- E-mail attachments transferred using the SMTP or SMTPS protocols
- Web downloads

- Files sent to Threat Emulation through the Threat Prevention API (see ["Threat Prevention API " on page 361](#))
- Files transferred using FTP and SMB protocols
- E-mail attachments transferred using the IMAP protocol

When emulation is done on a file

- The file is opened on more than one virtual computer with different operating system environments.
- The virtual computers are closely monitored for unusual and malicious behavior, such as an attempt to change registry keys or run an unauthorized process.
- Any malicious behavior is immediately logged and you can use Prevent mode to block the file from the internal network.
- The cryptographic hash of a new malicious file is saved to a database and the internal network is protected from that malware.
- After the threat is caught, a signature is created for the new (previously unknown) malware which turns it into a known and documented malware. The new attack information is automatically shared with Check Point ThreatCloud to block future occurrences of similar threats at the gateway.

If the file is found not to be malicious, you can download the file after the emulation is complete.

To learn more about Threat Emulation (see ["The Threat Emulation Solution" on page 90](#)).

Threat Extraction

Threat Extraction is supported on R77.30 and higher.

Threat Extraction extracts potentially malicious content from files before they enter the corporate network. To remove possible threats, the Threat Extraction does one of these two actions:

- Extracts exploitable content out of the file, or
- Creates a safe copy of the file by converting it to PDF

Threat Extraction receives files through these methods of delivery

- E-mail attachments received through the Mail Transfer Agent (see ["Configuring the Threat Prevention Profile and Rules" on page 60](#))
- Web downloads (see ["Configuring Threat Extraction Settings" on page 114](#))
- Files sent to Threat Extraction through the Threat Prevention API (see ["Threat Prevention API " on page 361](#))

Threat Extraction delivers the reconstructed file to users and blocks access to the original suspicious version, while Threat Emulation analyzes the file in the background. This way, users have immediate access to content, and can be confident they are protected from the most advanced malware and zero-day threats.

Threat Emulation runs in parallel to Threat Extraction for version R80.10 and above.

Examples for exploitable content in Microsoft Office Suite Applications and PDF files

- Queries to databases where the query contains a password in the clear
- Embedded objects
- Macros and JavaScript code that can be exploited to propagate viruses
- Hyperlinks to sensitive information
- Custom properties with sensitive information
- Automatic saves that keep archives of deleted data
- Sensitive document statistics such as owner, creation and modification dates
- Summary properties
- PDF documents with:
 - Actions such as launch, sound, or movie URIs
 - JavaScript actions that run code in the reader's Java interpreter
 - Submit actions that transmit the values of selected fields in a form to a specified URL
 - Incremental updates that keep earlier versions of the document
 - Document statistics that show creation and modification dates and changes to hyperlinks
 - Summarized lists of properties

Zero Phishing

Zero Phishing is a new technology and a Threat Prevention protection introduced in R81.20.

Zero Phishing prevents unknown zero-day and known phishing attacks on websites in real-time, by utilizing industry leading Machine-Learning algorithms and patented inspection technologies.

Phishing attacks continue to play a dominant role in the digital threat landscape, which is becoming more mature and sophisticated. Most cyber-attacks start with a phishing attempt.

The Check Point Zero Phishing protection scans the web traffic on the Security Gateway and sends it to the Check Point Cloud for scanning. This way, the Zero Phishing protection prevents access to the most sophisticated phishing websites, both known and completely unknown (zero-day phishing websites).

Because the protection is initiated on the network Security Gateway, the protection is browser-agnostic and platform-agnostic and it does not depend on an email security solution.

Protections usually provided by endpoint or email solutions are now available through the Security Gateway, with no need to install and maintain clients on any device.

When you enable Zero Phishing, you must set a Fully Qualified Domain Name (FQDN). The FQDN is resolved to the IP address of the Security Gateway, establishing a channel for script-to-gateway interaction. When activating Zero Phishing, a specialized script is seamlessly integrated into client traffic streams. This script plays a pivotal role in the protection from malicious phishing pages. To facilitate effective communication between the integrated script and the Security Gateway, a deliberate configuration process is necessary

The Zero Phishing protection uses two main engines:

- 1. Real-time phishing prevention based on URLs**

The engine prevents both known and unknown zero-day phishing attacks, by analyzing various features on the URL in real-time. The engine sends the URL information to the URL-reputation cloud service to perform the analysis. For example: brand similarity, non-ASCII characters and time of registration.

Using Machine-Learning, the risk is calculated and URLs are classified as phishing and blocked.

- 2. In-browser Zero Phishing**

The Security Gateway performs patented Java Script injection to scan HTML forms when they are loaded on the browser (including dynamic forms).

When the end-user clicks the input fields in the form, all HTML components are scanned in real-time, and the information is sent to the Check Point Zero Phishing cloud service for AI-based analysis.

The risk is calculated and the phishing site is blocked accordingly.

**Notes:**

- If both Browse Security and Zero Phishing protections are active for the same user, the Browse Security protection takes precedence over the Zero Phishing protection.
- Zero Phishing is supported on VSX, ClusterXL in High Availability and Load Sharing modes.
- Site scanning in Internet Explorer is not supported.
- JavaScript injection for HTTP 2.0 connections is not supported.
- In-browser Zero Phishing for mirrored traffic is not supported.
- When the Security Gateway is configured as the HTTP/HTTPS Proxy in the "Non Transparent" mode, internal users must have a direct access to the UserCheck Portal on the Security Gateway. In their web-browsers, internal users must add the FQDN of the Zero Phishing Portal to the Proxy Bypass List.

Custom Threat Prevention

Custom Threat Prevention lets you plan your policy independently based on the needs of your organization. With Custom Threat Prevention, you create your own Security Policy and configure the policy rules manually. If you prefer to create your Threat Prevention policy automatically and not manually, see ["Autonomous Threat Prevention" on page 287](#).

Getting Started with Custom Threat Prevention

You can configure Threat Prevention to provide the exact level of protection that you need, or you can decide to use the out-of-the-box configuration:

1. Enable Custom Threat Prevention Software Blades on the Security Gateway / Cluster object.

Enabling the Anti-Virus Software Blade

Starting from R82, the Anti-Virus Software Blade is enabled by default on each new Security Gateway and Cluster object. To disable this feature and for more information, see [sk182106](#).

If you disabled the default activation of Anti-Virus, you can enable Anti-Virus manually by following this procedure:

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The General Properties window opens.
2	In the General Properties > Network Security tab, select Anti-Virus . The Anti-Bot and Anti-Virus First Time Activation window opens.
3	Select the activation mode: ▪ According to the Anti-Bot and Anti-Virus policy - Enables the Anti-Virus Software Blade and uses the Anti-Virus profile settings in the Threat Prevention policy. ▪ Detect only - Packets are allowed, but the traffic is logged according to the settings in the Threat Prevention Rule Base.
4	Click OK .

Enabling the Anti-Bot & Advanced DNS Software Blade

Starting from R82, the Anti-Bot & Advanced DNS Software Blade is enabled by default on new Security Gateway and Cluster objects. To disable this feature and for more information, see [sk182106](#).

If you disable the default activation of Anti-Bot & Advanced DNS, you can enable Anti-Bot & Advanced DNS manually by following this procedure:

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The General Properties window opens.
2	In the General Properties > Network Security tab, select Anti-Bot . The Anti-Bot and Anti-Virus First Time Activation window opens.
3	Select the activation mode: ▪ According to the Anti-Bot and Anti-Virus policy - Enables the Anti-Bot Software Blade and uses the Anti-Bot profile settings in the Threat Prevention policy. ▪ Detect only - Packets are allowed, but the traffic is logged according to the settings in the Threat Prevention Rule Base.
4	Click OK .

Enabling the IPS Software Blade

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The General Properties window opens.
2	In the General Properties > Network Security tab, select IPS .
3	Follow the steps in the wizard that opens.
4	Click OK .
5	Click OK in the General Properties window.

Enabling the Threat Emulation Software Blade

Starting from R82.10, Threat Emulation is enabled by default on new Security Gateway and Cluster objects. The default emulation location is the ThreatCloud Emulation Service. For more information, see [sk182106](#).

You can select not to enable Threat Emulation by default during the creation of the new Security Gateway or Cluster object. In this case, you can enable Threat Emulation manually at a later time by following this procedure:

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The Gateway Properties window opens.
2	In the General Properties > Network Security tab, select SandBlast Threat Emulation.  Note - When you enable Threat Emulation, the wizard automatically gives you the option to enable Threat Extraction.
3	Select the Emulation Location: ▪ ThreatCloud Emulation Service ▪ Locally on this Threat Emulation appliance ▪ Other Threat Emulation appliances
4	Click Next.
5	The Activate Threat Extraction window opens. To enable the Threat Extraction blade, keep this check box selected: Clean potentially malicious parts from files (Threat Extraction). If you do not want to activate Threat Extraction, clear this check box.
5	Click Next. The Summary page opens.  Note - If you selected the Emulation Location as Locally on this Threat Emulation appliance or Other Threat Emulation appliances, and you want to share Threat Emulation information with ThreatCloud, select Share attack information with ThreatCloud.
6	Click Finish to enable Threat Emulation (and if selected, Threat Extraction), and then close the First Time Configuration Wizard.
7	Click OK. The Gateway Properties window closes.

- Note** - When a trial license is installed on the Security Gateway, a green "V" incorrectly appears next to the Threat Emulation Software Blade (in SmartConsole, go to the **Gateways & Servers** view > right-click the Security Gateway / Cluster object > click **Monitor**) > the **Device and License Information** window opens > **Device Status** > **Threat Emulation**). To see the correct license status, go to the **License Status** tab in the **Device and License Information** window.

Using Cloud Emulation

The Security Gateway sends files to the Check Point ThreatCloud for emulation over a secure TLS connection. The emulation in the ThreatCloud is identical to emulation in the internal network, but it uses only a small amount of CPU, RAM, and disk space on the Security Gateway. The ThreatCloud is always up-to-date with all available operating system environments.

- Best Practice** - For ThreatCloud emulation, make sure that the Security Gateway has internet connectivity. Make sure that the DNS and proxy settings are configured correctly in **Global Properties**.

Enabling the Threat Extraction Software Blade

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The General Properties window opens.
2	In the General Properties > Network Security tab, select Threat Extraction . Note - In a ClusterXL High Availability environment, enable Threat Extraction only once for the cluster object.

Notes:

- When you enable Threat Extraction, web download scan is automatically enabled.
- For Threat Extraction to scan e-mail attachments, configure the Security Gateway as a Mail Transfer Agent (MTA) (see ["Configuring the Security Gateway as a Mail Transfer Agent" on page 178](#)).
- For Threat Extraction API support, in the Security Gateway Properties, go to **Threat Extraction** > **Web API** > **Enable API**.

Enabling the Zero Phishing Software Blade

Starting from R82.10, Zero Phishing is enabled by default on new Security Gateway and Cluster objects. To disable this feature and for more information, see [sk182106](#).

If you disabled automatic activation of Zero Phishing, you can enable Zero Phishing manually by following this procedure:

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The General Properties window opens.
2	In the General Properties > Network Security tab, select Zero Phishing . The Zero Phishing First Time Configuration Wizard opens
3	In the FQDN Configuration window, select one of these two options for In-Browser Zero Phishing: Use automatic settings (recommended) When you enable Zero Phishing with the automatic settings, a new interface is created in the Security Gateway infrastructure in Gaia, called <code>tp_dummy</code> or <code>tp_dummy_X</code> (for VSX). This is a dummy interface which is intentionally isolated from external access. This interface has a constant IP address and allows Zero Phishing clients to communicate with the Security Gateway. When automatic settings are used, the client communicates with the Security Gateway using the FQDN <code>:zero-phishing.iaas.checkpoint.com</code>. Automatic configuration additionally resolves the challenge of private network accessibility that arises during the inspection of HTTP pages for customers who manually added an FQDN which resolves to an IP address within the private address space. Gateway FQDN (Fully Qualified Domain Name) If you select this option, make sure that the FQDN is registered in the DNS records of your DNS server.
4	The Zero Phishing Software Blade is now active.
5	Install both the Access Control and the Threat Prevention policies.

 Notes:

- Make sure that Zero Phishing portal is configured to work on a public IP address. For more information, see [sk178769](#).
- To ensure that the configuration was applied successfully, visit this page both with HTTP and HTTPS:
http://zp-demo.com/verification/zphi_check.html
https://zp-demo.com/verification/zphi_check.html
 If the test is successful, this message appears: **In-Browser Zero Phishing feature is working properly.**
- Clients must have direct access to the Zero Phishing FQDN. If you use the Security Gateway as a non-transparent proxy, you must configure the clients to add Zero Phishing FQDN to the proxy bypass.

2. Optional: Create your Custom Threat Prevention profiles based on the default Custom Threat Prevention profiles.

See *"Threat Prevention Profiles" on page 53*.

3. Optional: Configure advanced Threat Prevention settings:

- **Security Gateway / Cluster** object - Settings for Threat Prevention Software Blades and features.
- **Security Policies** view > **Threat Prevention** > **Exceptions**.
- **Security Policies** view > **Threat Prevention** > click **Custom Policy** > refer to the **Custom Policy Tools** section.
- **Security Policies** view > **HTTPS Inspection**.
- **Manage & Settings** view > **Blades** > **Threat Prevention** > **Advanced Settings**.
- **Security Gateway / each Cluster Member** command line - Configuration commands and files (for example, for SSH Deep Inspection).

4. Configure the Custom Threat Prevention policy.

Procedure

If the default rule is not enough for your environment, configure the required rules. See *"Configuring the Threat Prevention Profile and Rules" on page 60*.

When you enable one of the Threat Prevention Software Blades, a predefined rule is added to the Rule Base. The rule defines that all traffic for all network objects, regardless of who opened the connection (the protected scope value equals any, see *"Protected Scope" on page 48*) is inspected for all protections according to the **Optimized** profile (see *"Profiles Pane" on page 54*). By default, logs are generated and the rule is installed on all Security Gateways that use a Threat Prevention Software Blade.

Name	Protected Scope	Action	Track	Install On
Out-of-the-box Threat Prevention policy	*Any	Optimized	Log Packet Capture	*Policy Targets

 Notes:

- The **Optimized** profile is installed by default (see ["Optimized Protection Profile Settings" on page 54](#)).
- The **Protection / Site** column is used only for protection exceptions (see ["Protection" on page 50](#)).

The result of this rule (according to the **Optimized** profile) is that:

- When an attack meets the below criteria, the protections are set to **Prevent** mode
 - **Confidence Level** - Medium or above
 - **Performance Impact** - Medium or lower
 - **Severity** - Medium or above
- When an attack meets the below criteria, the protections are set to **Detect** mode
 - **Confidence Level** - Low
 - **Performance Impact** - Medium or above
 - **Severity** - Medium or above

5. Install the Custom Threat Prevention policy.

Procedure

The Custom Threat Prevention Software Blades have a dedicated Threat Prevention policy.

You can install this policy separately from the policy installation of the Access Control Software Blades.

Install only the Threat Prevention policy to minimize the performance impact on the Security Gateways.

Step	Instructions
1	From the Global toolbar, click Install Policy . The Install Policy window opens showing the installation targets (Security Gateways).

Step	Instructions
2	Select Threat Prevention .
3	Select the Install Mode: Install on each selected gateway independently Install the policy on the selected Security Gateways without reference to the other targets. A failure to install policy on one Security Gateway does not affect policy installation on other Security Gateways. If the Security Gateway is a Cluster Member, install the policy on all members. The Security Management Server makes sure that it can install the policy on all members before it installs the policy on one of them. If the policy cannot be installed on one of the members, policy installation fails for all of them. Install on all selected gateways, if it fails do not install on gateways of the same version Install the policy on all installation targets. If the policy fails to install on one of the Security Gateways, the policy is not installed on other targets of the same version.
4	Click OK .

 **Note** - Most traffic is HTTPS rather than HTTP. Therefore, to maximize the effectiveness of the Threat Prevention Software Blades, we recommend to also enable HTTPS Inspection. See ["HTTPS Inspection" on page 363](#)

Disabling the Threat Prevention Blades

When you disable all the Threat Prevention Software Blades on a Security Gateway object, you must click the **Install Policy** button and then click the **Uninstall Threat Prevention Policy** link.

Monitoring

Use the **Logs & Events** view in to show logs related to Threat Prevention traffic. Use the logs and events data to better understand the use of these Software Blades in your environment and create an effective Rule Base. You can update the Rule Base directly from the **Logs & Events** view. You can add more exceptions that prevent or detect specific protections or have different tracking settings. For more information, see the [R82.10 Logging and Monitoring Administration Guide](#).

The Threat Prevention Policy

Workflow for Creating a Threat Prevention Policy

Threat Prevention lets you customize profiles that meet the needs of your organization.

Ideally, you might want to set all protections to Prevent in order to protect against all potential threats. However, to let your gateway processes focus on handling the most important traffic and report only the most concerning threats, you need to determine the most effective way to apply the Threat Prevention settings.

When you define a new Threat Prevention profile, you can create a Threat Prevention Policy which activates only the protections that you need and prevents only the attacks that most threaten your network.

This is the high-level workflow to create and deploy a Threat Prevention policy

Step	Instructions
1	Enable the Threat Prevention Software Blades on the Security Gateways.
2	Update the IPS database and Malware database with the latest protections.
3	Optional: Create Policy Packages.
4	Optional: For each Policy Package, create Threat Prevention Policy Layers. Note - For each Policy Layer, configure a Threat Prevention Rule Base with the Threat Prevention profile as the <i>Action</i> of the rule.
5	Install the Threat Prevention policy.

Assigning Administrators for Threat Prevention

You can control the administrator Threat Prevention permissions with a customized Permission Profile. The customized profile can have different Read/Write permissions for Threat Prevention policy, settings, profiles and protections.

To Learn More about Policy Packages

To learn more about Policy Packages, see the [R82.10 Security Management Administration Guide](#).

Threat Prevention Policy Layers

You can create a Threat Prevention Rule Base with multiple Policy Layers. Policy Layers help you organize your Rule Base to best suit your organizational needs. You can divide the Policy Layers by services or networks. Each Policy Layer calculates its action separately from the other Layers. In case of one Layer in the policy package, the rule enforced is the first rule matched. In case of multiple Layers:

- If a connection matches a rule in only one Layer, then the action enforced is the action in that rule.
- When a connection matches rules in more than one Layer, the gateway enforces the strictest action and settings.

 **Important** - When the Threat Prevention blades run in MTA mode, the gateway enforces the automatic MTA rule, which is created when MTA is enabled on the gateway.

Action Enforcement in Multiple-Layered Security Policies

These examples show which action the Security Gateway enforces when a connection matches rules in more than one Policy Layers.

Example 1

The Layers "IPS" and "Threat Prevention" are pre-defined.

	IPS Layer	Threat Prevention Layer
Rule matched	Rule 3	Rule 1
Profile action	Prevent	Detect

Enforced action: Prevent

Example 2

The Layers "IPS" and "Threat Prevention" are pre-defined.

	IPS Layer	Threat Prevention Layer
Rule matched	Rule 3	Rule 1
Profile action	Prevent	Detect
Exception for protection X	Inactive	-

Enforced action for protection X: Detect

Example 3

These Layers are user-defined.

	Data Center Layer	Corporate LAN Layer
Rule matched	Rule 3	Rule 1
Profile action	Prevent	Detect
Override for protection X	Detect	-
Exception for protection X	Inactive	-

Exception is prior to override and profile action. Therefore, the action for the Data Center Layer is Inactive.

The action for the Corporate LAN Layer is Detect.

Enforced action for protection X: Detect.

Example 4

These Layers are user-defined.

	Data Center Layer	Corporate LAN Layer
Rule matched	Rule 3	Rule 1
Profile action	Deep Scan all files	Process specific file type families: Inspect doc files and Drop <code>rtf</code> files.

Enforced action: Deep Scan doc files and Drop `rtf` files.

Example 5

MIME nesting level and Maximum archive scanning time

The strictest action is:

Allow combined with the maximum nesting level/scanning time,

OR

Block combined with the minimum nesting level/scanning time,

OR

If both Block and Allow are matched, the enforced action is Block.

Example 6

This example is for UserCheck.

These Layers are user-defined.

The first Layer with the strictest action is enforced.

Enforced Action: Prevent with UserCheck Page B.

	HR Layer	Finance Layer	Data Center Layer 3
Rule matched	Rule 3	Rule 1	Rule 4
Profile action	Detect	Prevent	Prevent
Configured page	Page A	Page B	Page C

Creating a New Policy Layer

This section explains how to create a new Threat Prevention Policy Layer. You can configure reuse of Threat Prevention Policy Layers in different Policy Packages, and set different administrator permissions per Threat Prevention Layer.

To create a new Threat Prevention Layer

Step	Instructions
1	In SmartConsole, go to Security Policies > Threat Prevention .
2	Right-click Policy and select Edit Policy .
3	In the General tab, go to Threat Prevention and click the + sign.
4	Select New Layer . The New Threat Prevention Layer window opens.
5	Enter the Layer Name.
6	Optional: In the General tab, in the Sharing area, you can configure reuse of the layer in different policy packages. Select Multiple policies and rules can use this layer .
7	In the Permissions tab, select the permission profiles that can edit this layer. Note - There is no need to add permission profiles that are configured to edit all layers.
8	Click OK .

Threat Prevention Layers in Pre-R80 Gateways

In pre-R80 versions, the IPS Software Blade was not part of the Threat Prevention Policy, and was managed separately. In R80.XX versions, the IPS Software Blade is integrated into the Threat Prevention Policy.

When you upgrade SmartConsole to R80.XX from earlier versions, with some Security Gateways upgraded to R80.XX, and other Security Gateways remaining in previous versions:

- For pre-R80 gateways with IPS and Threat Prevention Software Blades enabled, the policy is split into two parallel layers: IPS and Threat Prevention.

To see which Security Gateway enforces which IPS profile, look at the **Install On** column in the IPS Layer.

- R80.XX gateways are managed separately, based on the R80 or higher Policy Layers (see ["Threat Prevention Policy Layers" on page 44](#)).

 **Best Practice** - For better performance, we recommend that you use the **Optimized** profile when you upgrade to R80 or higher from earlier versions.

Threat Prevention Rule Base

Each Threat Prevention Layer contains a Rule Base. The Rule Base determines how the system inspects connections for malware.

The Threat Prevention rules use the Malware database and network objects. Security Gateways that have Identity Awareness enabled can also use Access Role objects as the **Protected Scope** in a rule. The Access Role objects let you easily make rules for individuals or different groups of users.

There are no implied rules in this Rule Base, traffic is allowed or not allowed based on how you configure the Rule Base. For example, A rule that is set to the **Prevent** action, blocks activity and communication for that malware.

Parts of the Rules

The columns of a rule define the traffic that it matches and what is done to that traffic.

Number (No.)

The sequence of rules is important because the first rule that matches traffic according to a protected scope (see ["Protected Scope" on the next page](#)) and profile is applied.

For example, if rules 1 and 2 share the same protected scope and a profile in rule 1 is set to *detect* protections with a medium confidence level and the profile in rule 2 is set to *prevent* protections with a medium confidence level, then protections with a medium confidence level will be *detected* based on rule 1.

Name

1. Give the rule a descriptive name. The name can include spaces.
2. Double-click in the **Name** column of the rule to add or change a name.
3. Click OK.

Protected Scope

Threat Prevention rules include a *Protected Scope* parameter. Threat Prevention inspects traffic to and/or from all objects specified in the **Protected Scope**, even when the specified object did not open the connection. This is an important difference from the **Source** object in Firewall rules, which defines the object that opens a connection.

For example, the Protected Scope includes a Network Object named "MyWebServer". Threat Prevention inspects all files sent to "MyWebServer" for malware threats, even if "MyWebServer" did not open the connection.

Protected Scope objects can be

- Network objects, such as Security Gateways, clusters, servers, networks, IP ranges, and so on. From R80.10, dynamic objects and domain objects are also supported in the Threat Prevention Policy.
- Network object groups
- Updatable objects (from R80.40)
- IP address ranges
- Roles
- Zones
- Data Center

For more details on the various types of objects, see the [R82.10 Security Management Administration Guide](#).

You can set the **Protected Scope** parameter to **Any**. This option lets Threat Prevention inspect traffic based on the direction and interface type as defined by the Profile assigned to the applicable rule. By default, the predefined **Optimized Rule** sets the **Protection Scope** to **Any**.

Traffic Direction and Interface Type Settings

You can configure the traffic direction and Security Gateway interface types that send files to Threat Prevention for inspection. You do this in the **Protected Scope** section of the **Anti-Virus** or **Threat Emulation Settings** window.

The options are

- **Inspect incoming files from:**

Sends **only incoming** files from the specified interface type for inspection. Outgoing files are not inspected. Select an interface type from the list:

- **External** - Inspect incoming files from external interfaces. Files from the DMZ and internal interfaces are not inspected.
- **External and DMZ** - Inspect incoming files from external and DMZ interfaces. Files from internal interfaces are not inspected.
- **All** - Inspect all incoming files from all interface types.

- **Inspect incoming and outgoing files** - Sends all incoming and outgoing files for inspection.

When you select the **Any** option in the **Protected Scope** section of a rule, the traffic direction and interface type are defined by the **Profile** assigned to that rule. If you add objects to the Protected Scope in a rule, files that match these objects are inspected for all connections.

Using Protected Scope with SPAN and TAP Configurations

The default global parameter for SPAN and TAP configuration is set to **inspect all**. You can use these commands to configure the Security Gateway to use the Protected Scope settings for SPAN and TAP with Threat Emulation.

- The "fw ctl set int" command - Changes current **Protected Scope** settings for SPAN and TAP, does not survive reboot
- The `$FWDIR/module/fwkernel.conf` file - This changes the settings after reboot.

Run these commands to set the SPAN port to use the Policy instead of the global default setting (**inspect all**)

```
# fw ctl set int te_handle_span_port_interfaces_according_to_topolgy 1
# echo "te_handle_span_port_interfaces_according_to_topolgy=1" >>
$FWDIR/boot/modules/fwkernel.conf
```

Limitations and Troubleshooting

- If no topology is defined for the Security Gateway interfaces, all traffic is inspected or sent for emulation.
- When you upgrade from R76 or lower, the **Inspect incoming files** option is set to **All** by default.

- When the topology of the interfaces is defined and you are using SPAN or TAP modes, it is possible that some of the connections are not defined correctly.

Protection

The **Protection/Site/File/Blade** column shows the protections for the Threat Prevention policy.

- In **rules**, this field is always set to **n/a** and you cannot change it.
- For **rule exceptions** and **exception groups**, you can set this field to one or more specified protections. See ["Exception Rules" on page 137](#).

Action

Action refers to how traffic is inspected.

- For **rules**, this is defined by the profile. The profile contains the configuration options for different confidence levels and performance impact (see ["Profiles Pane" on page 54](#)).
- For **rule exceptions** and **exception groups**, you can set the action to **Prevent** or **Detect**.

To select a profile for a rule

Step	Instructions
1	Click in the Action column.
2	Select an existing profile from the list, create a new profile, or edit the existing profile.

Threat Prevention Track Options

Tracking options and their description

Track Option	Description
None	Do not generate an alert.
Alert	Generate a log and run a command, such as display a popup window, send an email alert or an SNMP trap alert, or run a user-defined script as defined in the Menu > Global Properties > Log and Alert > Alerts .
Packet Capture	Adds raw IPS, Anti-Virus, Anti-Bot & Advanced DNS, Threat Emulation and Threat Extraction packet data to the Threat Prevention logs. Only blocked packets are added (see "Packet Capture" on page 258).
Forensics	Adds fields to the Threat Prevention logs. The extra information gives you a deeper understanding of an attack (see "Advanced Forensics Details" on page 259).

Install On

1. Select the Security Gateways, on which to install the rule. The default is *All* (all Security Gateways that have a Threat Prevention blade enabled).
2. Put your mouse in the column and a plus sign shows.
3. Click the plus sign to open the list of available Security Gateways and select the applicable Security Gateway.

If you right-click a column in the table, you can add more columns to the table from the list that shows.

Concurrent Install Policy

Starting from R81, one administrator or more can run *different* policy installation tasks on multiple gateways at the same time. In earlier versions, you can only run the *same* policy installation task on multiple gateways at the same time.

Concurrent Install Policy only supports the Access Control and Threat Prevention policies. It does not support the Desktop and QoS policies.

The maximum number of policy installation tasks (of different policies) that can run at the same time is 5. If more than 5 policy installation requests are sent, any request beyond the first 5 gets in a queue.

The running and the queued tasks appear in the **Recent Tasks** window at the bottom left of your screen.

Note - In the first installation, you cannot install both the Access Control and Threat Prevention policies on the same gateway at the same time. You must install one and then the other.

Threat Prevention Profiles

Introducing Profiles

Check Point Threat Prevention provides instant protection based on pre-defined Threat Prevention **Profiles**. You can also configure a custom Threat Prevention profile to give the exact level of protection that the organization needs.

When you install a Threat Prevention policy on the Security Gateways, they immediately begin to enforce IPS protection on network traffic.

A Threat Prevention profile determines which protections are activated, and which Software Blades are enabled for the specified rule or policy.

The protections that the profile activates depend on these factors

- Performance impact of the protection
- Severity of the threat
- Confidence that a protection can correctly identify an attack
- Settings that are specific to the Software Blade

A Threat Prevention profile applies to one or more of the Threat Prevention Software Blades: IPS, Anti-Bot & Advanced DNS, Anti-Virus, Threat Emulation, Threat Extraction, and Zero Phishing.

Profile

A profile is a set of configurations based on these:

- Activation settings (prevent, detect, or inactive) for each confidence level of protections that the ThreatSpect engine analyzes
- IPS settings
- Anti-Bot & Advanced DNS
- Anti-Virus settings
- Threat Emulation settings
- Threat Extraction settings
- Zero Phishing settings
- Indicator configuration

Without profiles, it would be necessary to configure separate rules for different activation settings and confidence levels. With profiles, you get customization and efficiency.

SmartConsole includes these default Threat Prevention profiles

Profile	Description
Optimized	Provides excellent protection for common network products and protocols against recent or popular attacks
Strict	Provides a wide coverage for all products and protocols, with impact on network performance
Basic	Provides reliable protection on a range of non-HTTP protocols for servers, with minimum impact on network performance

Optimized Protection Profile Settings

The **Optimized** profile is activated by default, as it provides excellent security while maintaining good Security Gateway performance.

These are the goals of the Optimized profile, and the settings that achieve those goals

Goal	Parameter	Setting
Apply settings to all the Threat Prevention Software Blades	Blades Activation	Activate the profile for IPS, Anti-Bot & Advanced DNS, Anti-Virus, Threat Emulation, Threat Extraction and Zero Phishing.
Do not have a critical effect on performance	Performance impact	Activate protections that have a <i>Medium or lower</i> effect on performance.
Protect against important threats	Severity	Protect against threats with a severity of <i>Medium or above</i> .
Reduce false-positives	Confidence	Set to <i>Prevent</i> the protections with an attack confidence of <i>Medium or High</i> . Set to <i>Detect</i> the protections with a confidence of <i>Low</i> .

Profiles Pane

The pane shows a list of profiles that were created, their confidence levels, and performance impact settings.

The Profiles pane contains these options

Option	Meaning
New	Creates a new profile.
View	Shows an existing profile.
Edit	Modifies an existing profile.
Clone	Creates a copy of an existing profile.
Delete	Deletes a profile.
Where Used	Shows you reference information for the profile.
Search	Searches for a profile.
Last Modified	Shows who last modified the selected profile, when and on which client.

Performance Impact

Performance impact is how much a protection affects a Security Gateway's performance. Some activated protections may negatively impact connectivity or overall performance. You can configure the Threat Prevention policy so that protections with high performance impact are not set to **Prevent** or **Detect**.

These are the degrees of performance impact

- High or lower
- Medium or lower
- Low or lower
- Very low

Severity

Severity of the threat. Probable damage of a successful attack to your environment.

These are the degrees of severity

- Low or above
- Medium or above
- High or above
- Critical

Activation Settings

Setting	Description
Ask	The Software Blade blocks the file or traffic until the user makes sure that the Security Gateway should send it. The user decides if the file or traffic are allowed or not. The decision itself is logged in the User Response field in the Ask User log.
Prevent	The Software Blade blocks the file or traffic from passing through the Security Gateway. It also logs the traffic, or tracks it, according to configured settings in the Rule Base.
Detect	The Software Blade allows identified file or traffic to pass through the Security Gateway. It also logs the traffic, or tracks it, according to configured settings in the Rule Base.
Inactive	The Software Blade deactivates a protection.

Confidence Level

The confidence level is how confident the Software Blade is that recognized attacks are actually virus or bot traffic. Some attack types are more subtle than others and legitimate traffic can sometimes be mistakenly recognized as a threat. The confidence level value shows how well protections can correctly recognize a specified attack.

Creating Profiles

You can choose from multiple pre-configured Profiles, but not change them. You can create a new profile or clone a profile. When you create a new profile, it includes all the Threat Prevention Software Blades by default.

When HTTPS inspection is enabled on Security Gateway, Threat Emulation, Anti-Bot & Advanced DNS, and Anti-Virus can analyze the applicable HTTPS traffic.

To create a new Threat Prevention profile

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click a profile and select New .

Step	Instructions
4	Configure the settings for the profile.
5	Click OK .
6	Install the Threat Prevention policy.

Cloning Profiles

You can create a clone of a selected profile and then make changes. You cannot change the out-of-the-box profiles: **Basic**, **Optimized**, and **Strict**.

To clone a Threat Prevention profile

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click the profile and select Clone .
4	The Name field shows the name of the copied profile plus _copy .
5	Rename the profile.
6	Click OK .
7	Publish the SmartConsole session.

Editing Profiles

You can change the settings of the Threat Prevention profile according to your requirements.

To edit a profile

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click the profile and select Edit .

Deleting Threat Prevention Profiles

You can delete a profile, but you cannot delete the default Threat Prevention profiles.

To delete a profile

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click the profile, and click Delete . A window opens and shows a confirmation message.
4	Click Yes . If the profile is used by another object, you cannot delete it. The error message is shown in the Tasks window.
5	In SmartConsole, install the policy.

To show the objects that use a profile

Step	Instructions
1	From the Profiles page, select the profile. The Summary page opens.
2	From the Where Used section in the Summary tab, click Where Used . The Where Used window opens and shows the profile.
3	Right-click the rule and select View in policy .

Viewing Changes to a Threat Prevention Profile

You can view the Audit log and see changes that were made to a Threat Prevention profile.

To view the Audit log for a Threat Prevention profile

Step	Instructions
1	In SmartConsole, click Logs & Events .
2	Click the Audit tab, or press CTRL + T , and then click Open Audit Logs View .
3	In Enter search query , enter the name of the profile.

Step	Instructions
4	To refine the search: - Right-click the Object Type column heading and select Add Filter. - Enter Threat Prevention Profile. - Click the filter to add it to the search. - Click OK. The search results are filtered to Threat Prevention profiles.
5	To see more information about the changes to a profile, double-click the Audit log.

Assigning Profiles to Security Gateways

When you enable the IPS Software Blade on a pre-R80 Security Gateway, a default IPS rule is automatically created in the IPS policy layer of the Security Policy. The Action of this rule is set according to the IPS setting of the assigned Threat Prevention Profile. You can change the profile from the **Action** column.

Note - Only the IPS settings from the Threat Prevention Profile apply to the IPS Policy.

To assign a profile to a Security Gateway

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention > Policy > IPS .
2	Click the Action cell, and select the Threat Prevention profile.
3	Install the Access Control policy.

Configuring the Threat Prevention Profile and Rules

Create and manage the policy for the Threat Prevention:

The **Threat Prevention** page shows the rules and exceptions for the Threat Prevention policy. The rules set the Threat profiles for the network objects or locations defined as a protected scope.

Click the **Add Rule** button to get started.

- You can configure the Threat Prevention settings in the Threat Prevention profile for the specified rule.
- To learn about bots and protections, look through the ThreatWiki.

 **Best Practice** - Disable a rule when you work on it. Enable the rule when you want to use it. Disabled rules do not affect the performance of the Gateway. To disable a rule, right-click in the **No** column of the rule and select **Disable**.

Configuring Mail Settings

General

Options

- **Emulate emails for malicious content (requires Threat Emulation)** - When this option and the Threat Emulation blade are enabled, the Threat Emulation blade scans SMTP traffic.
- **Scan emails for viruses (requires Anti-Virus)** - When this option and the Anti-Virus blade are enabled, the Anti-Virus blade scans SMTP traffic.
- **Extract potentially malicious attachments (requires Threat Extraction)** - When this option and the Threat Extraction blade are enabled, the Threat Extraction blade scans SMTP traffic.

Malicious Email Policy on MTA Gateways

In this section you can decide whether to block or allow an email which was found malicious.

If you allow the email, you can select any or all of these options

- **Remove attachments and links** - This option is selected by default. You can replace a link or an attachment found malicious with a neutralized version of the links and attachments. The neutralized email version is sent to the recipient with a customizable template.

Click "Configure" to edit the template

Malicious Attachments - Replaced by a neutralized *txt* file. You can customize the message which the user receives. To add more file-related information to your message, click **Insert Field** (for example: file name or MD5 hash).

Failed to Scan Attachments - If the scanning of the attachment fails and fail mode is set to fail-close, the attachment is replaced with a *txt* attachment. If fail mode is set to fail-open, the original attachment is allowed. To add more file-related information to your message, click **Insert Field** (for example: file name or MD5 hash).

Malicious Links - Replaced by a neutralized link. To add more link-related information to your message, for example, neutralized URL.

- **Add an X-Header to the email** - Tag the email found malicious with an X-Header. The X-Header format is: "X-Check Point-verdict: <verdict >; confidence: <confidence>".

Example

"X-Check Point-verdict: malicious; confidence: high". With this option, you can configure the MTA Next Hop to quarantine all emails with a specific X-Header.

- **Add a prefix to the email subject** - Adds a prefix to the subject of an email found malicious.

Example

You can add a warning message that the email is malicious. Click **Configure** to edit the prefix.

- **Add customized text to the email body** - This option adds a section at the beginning of the email body, based on a customizable template, with an optional placeholder for the verdicts of the links and attachments found malicious or failed to be scanned. The links are given in their neutralized versions, and attachments are only given by file names. Click **Configure** to edit the template.

Send a copy to the following list - This option is available both if you allow or block the malicious email. With this option, the original email (with the malicious attachments and links) is attached to a new email, which contains: the verdict list with the neutralized links and attachment file names, and the SMTP envelope information. You can configure the email content on the gateway. You can use this option for research purposes.

Example

The [Check Point Incident Response Team](#) needs to inquire the emails received in the organization for improved security and protection.

Use Case

The configuration in the **Mail** page lets you block or allow malicious emails. However, you do not want to configure a global decision regarding all malicious emails. You prefer to make a decision per each email separately, on a case-by-case basis. For that purpose, you need to create a system in which Threat Emulation allows the emails, but does not send them to the recipient right away. Instead, it puts them in a container where you can check them and then decide whether to block or allow them.

To configure external quarantine for malicious emails

Step	Instructions
1	Enable MTA on your gateway (see "Configuring the Security Gateway as a Mail Transfer Agent" on page 178).
2	Clone the Profile you wish to configure and rename it.
3	In the new profile, go to Mail > General > Malicious Email Policy on MTA Gateways and select Allow the email .
4	Clear Remove attachments and links .
5	Select Add an X-Header to the email. Note - When you add an X-Header to the email, the rest of the email is kept in the email's original form. The other options: Remove attachments and links , Add a prefix to the email subject and Add customized text to the email body , change the email, and therefore must be cleared.
6	Click OK .
7	Install Policy.

In the **Next Hop** - Configure a rule which quarantines all emails which were marked with an X-Header by the MTA.

You can now see the emails in the Next Hop in their original forms and examine them. After you examine the emails in the Next Hop, you can decide whether to allow or block them.

Exceptions

You can exclude specific email addresses from the Threat Emulation or Threat Extraction protections.

To exclude emails from Threat Emulation

Step	Instructions
1	In Emulation Exceptions , click Configure .
2	In the Recipients section, click the + button to enter one or more emails. Emails and attachments that are sent to these recipients will not be sent for emulation.
3	In the Senders section, click the + button to enter one or more emails. Emails and attachments that are received from these senders will not be sent for emulation. Note - You can use a wildcard character to exclude more than one email address from a domain.
4	Click OK .

Note - If you want to do emulation on outgoing emails, make sure that you set the Protected Scope to **Inspect incoming and outgoing files**.

To exclude emails from Threat Extraction

Step	Instructions
1	In Extraction Exclusion/Inclusion : 1. Select Scan all emails (selected by default) and click Exceptions. 2. Click the + button to exclude specific recipients, users, groups or senders. 3. Select Scan mail only for specific users or groups and click Configure. 4. Click the Add button to exclude specific User Groups, Recipients, or Senders.
2	Click OK .

Examples:

- A *user* is an object that can contain an email address with other details.
- A *group* is an AD group or an LDAP group of users.
- A *recipient* is an email address only.



Important - In the main SmartConsole menu > **Global Properties** > **User Directory**, make sure that you selected **Use User Directory for Security Gateways**.

Signed Email Attachments

Signed emails are not encrypted, but the mail contents are *signed* to authenticate the sender. If the received email differs from the email that was sent, the recipient gets a warning, and the digital signature is no longer valid.

Clean replaces the original attachment with an attachment cleaned of threats, or converts the attachment to PDF form. Both actions invalidate the digital signature. If the attachment does not include active content, the mail remains unmodified and the digital signature valid.

Allow does not change the email. The digital signature remains valid. Select this option to prevent altering digital signatures.

MIME Nesting

This is an optional configuration. In this section, you can configure the maximum number of MIME nesting levels to be scanned (A nesting level is an email within an email). These settings are the same for Anti-Virus, Threat Emulation and Threat Extraction.

- **Maximum MIME nesting is (levels)** - Set the maximum number of levels in the email which the engine scans.
- **When nesting level is exceeded (action on file)** - If there are more MIME nested levels than the configured amount, select to **Block** or **Allow** the email.

Configuring IPS Profile Settings

To configure IPS settings for a Threat Prevention profile

- Important** - To ensure IPS protections are enforced on HTTPS traffic, you must enable HTTPS Inspection in the Security Gateway / Security Cluster object in SmartConsole, with inspection enabled for the respective traffic. See ["HTTPS Inspection" on page 363](#).

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click the profile, and click Edit .
4	From the navigation tree, click IPS > Additional Activation .
5	Configure the customized protections for the profile (see "Additional Activation Fields" on the next page).
6	From the navigation tree, click IPS > Pre-R80 Settings .
7	Configure the settings for newly downloaded IPS protections (see "Updates" on the next page).
8	If you import IPS profiles from a pre-R80 deployment 1. From the navigation tree, click IPS > Pre-R80 Settings. 2. Activate the applicable Client and Server protections (see "Pre-R80 Settings" on page 67). 3. Configure the IPS protection categories to exclude from this profile (see "Pre-R80 Settings" on page 67). Note - These categories are different from the protections in the Additional Activation page.
9	Click OK .
10	Click Install Policy .

Additional Activation Fields

For additional granularity, in the **Additional Activation** section of the **Profile** configuration window, you can select IPS protections to activate and to deactivate. The IPS protections are arranged into tags (categories) such as **Product**, **Vendor**, **Threat Year**, and others, for the ease of search. The Security Gateways enforce activated protections, and do not enforce deactivated protections, regardless of the general profile protection settings.

Activate IPS protections according to the following additional properties - When selected, the categories configured on this page modify the profile's IPS protections.

- **Protections to activate** - The IPS protection categories in this section are enabled on the Security Gateways that use this Threat Prevention profile.
- **Protections to deactivate** - The IPS protection categories in this section are NOT enabled on the Security Gateways that use this Threat Prevention profile.

These categories only filter out or add protections that comply with the Profile settings (Confidence, Severity, Performance in the General Policy page of the Profile).

For example, if a protection is inactive because of its Performance rating, it is not enabled even if its category is in **Protections to activate**.

Updates

There are numerous protections available in IPS. It takes time to become familiar with those that are relevant to your environment. Some are easily configured for basic security and can be safely activated automatically.

In the Threat Prevention profile, you can configure an updates policy for IPS protections that were newly updated. You can do this with the **IPS > Updates** page in the **Profiles** navigation tree.

Select one of these settings for Newly Updated Protections

- **Active - According to profile settings** - Selected by default. Protections are activated according to the settings in the **General** page of the Profile. This is the Check Point recommended configuration.

Set activation as staging mode - Newly updated protections remain in staging mode until you change their configuration. The default action for protections in staging mode is Detect. You can change the action manually in the IPS **Protections** page (see ["Activating Protections" on page 72](#)).

Click **Configure** to exclude specific protections from staging mode.

- **Inactive** - Newly updated protections are not activated

- ★ **Best Practice** - In the beginning, allow IPS to activate protections based on the IPS policy. During this time, you can analyze the alerts that IPS generates and how it handles network traffic, while you minimize the impact on the flow of traffic. Then you can manually change the protection settings to suit your needs.

Pre-R80 Settings

The pre-R80 settings are relevant for the pre-R80 Security Gateways only.

Protections Activation

Activate protections of the following types

- **Client Protections** - Select to activate protections that protect only clients (for example, personal computers).
- **Server Protections** - Select to activate protections that protect only servers.

If a network has only clients or only servers, you can enhance Security Gateway performance by deactivation of protections. If you select Client Protections and Server Protections, all protections are activated, except for those that are:

- Excluded by the options selected here
- Application Controls or Engine Settings
- Defined as Performance Impact - Critical

Excluded Protections Categories

Do not activate protections of the following categories - The IPS protection categories you select here are not automatically activated. They are excluded from the Threat Prevention policy rule that has this profile in the action of the Rule Base.

Configuring IPS Protections for Custom Threat Prevention

Protection Browser

The Protection browser displays the available IPS protection types, along with a summary of key information and usage indicators.

These are some of the default columns in the IPS protections summary table.

Column	Description
Protection	Name of the protection. A description of the protection type appears in the bottom section of the pane.
Industry Reference	International CVE or CVE candidate name associated with the attack.

Column	Description
Performance Impact	Indicates how the protection affects Security Gateway performance. If available, shows an exact figure. Some protections require more resources or apply to common traffic types, which can negatively affect Security Gateways performance. For example, if your Security Gateways experience a heavy traffic load, be cautious about activating High or Critical Performance Impact protections on profiles that affect a large number of mixed (client and server) devices.
Severity	Indicates the probable severity of a successful attack on your environment. You should generally activate protections with Critical or High Severity , unless you are sure that the protections are not needed. For example, if a protection is rated with High Severity and Critical Performance Impact , evaluate its necessity for your environment before activating it.
Confidence Level	Indicates how accurately IPS identifies the attack. A Low Confidence Level increases the chance of false positives, which can lead to connectivity issues, such as blocked applications or disrupted services. Review protections with a Low Confidence Level to troubleshoot these issues and adjust configurations as needed.
Profile_Name	The Action set for the protection in each IPS profile.

To add or remove columns from the IPS Protections view:

Right-click the table header, and select or clear the applicable columns.

To change the display of profile columns:

1. In the top tool bar of the **IPS Protections** view, select **View > Show Profiles**

The **Show Profiles** window opens.

2. Select which profiles to display:
 - **All IPS enabled profiles used in the Custom Threat Prevention policy**, or
 - **Specified IPS enabled profiles** - Select the applicable profiles from the list.

Exporting the IPS Protections View

You can export the **IPS Protections** view to a `CSV` file. SmartConsole exports only the columns that are visible in the **IPS Protections** view at the time of export.

To export the IPS Protections view:

1. Go to **Actions > Export view**.
2. Select a location to save the exported file.

Protection Types

The IPS protections are divided into two main types:

- **Core protections** - These protections are included in the product and are assigned per gateway. They are part of the Access Control policy.
- **ThreatCloud protections** - Updated from the Check Point cloud (see ["Updating IPS Protections" on the next page](#)). These protections are part of the Threat Prevention policy.

Browsing IPS Protections

The **IPS Protections** summary lets you quickly browse all IPS protections and their settings.

To show IPS protections

Step	Instructions
1	In SmartConsole, go to the Security Policies page and select Threat Prevention .
2	In the Custom Policy Tools section, click IPS Protections .

You can search the **IPS Protections** page by protection name, engine, or by any information type that is shown in the columns.



Note - Check Point does not support JA3 and JA4 profiling technologies.

To filter the protections

Step	Instructions
1	From the IPS Protections window, click the Filter icon. The Filters pane opens and shows IPS protections categories.

Step	Instructions
2	To add more categories 1. Click the Add filter button. A window opens and shows the IPS protections categories. 2. Click the category. The category is added to the Filters pane.
3	Click one or more filters to apply to the IPS protections.
4	To show all suggested filters in a category, click View All .

To sort the protections list by information

Click the column header of the information you want.

Updating IPS Protections

Check Point constantly develops and improves its protections against the latest threats. You can immediately update IPS with real-time information on attacks and all the latest protections. You can manually update the IPS protections and also set a schedule when updates are automatically downloaded and installed. IPS protections include many protections that can help manage the threats against your network. Make sure that you understand the complexity of the IPS protections before you manually modify the settings.

Notes:

- To enforce the IPS updates, you must install the Threat Prevention Policy.
- When you assign or reassign a global configuration while an IPS update runs on a Domain, you may get an "Internal error occurred" error. To resolve this issue:
 1. Connect with SmartConsole to the Domain Management Server.
 2. Run the IPS update.
 3. Close the SmartConsole which is connected to the Domain Management Server.
 4. In the global SmartConsole, assign or reassign the global configuration.

To update IPS Protections

In SmartConsole, click the **Security Policies** view > **Threat Prevention** > in the **Custom Policy Tools** section, click **Updates**.

Step	Instructions
1	In the IPS section > Update Now , from the drop-down menu, select: ▪ Download with SmartConsole - If your Security Management Server has no internet access. ▪ Download with Security Management Server. ▪ Offline Update - If you want to manually upload the file. Select the required file for the update, and then click Open.
2	Install the Threat Prevention Policy.

 **Note** - IPS purge runs automatically after every IPS update. The Security Management Server saves only the versions from the last 30 days, and deletes the others.

Scheduling IPS Updates

You can configure a schedule for downloading the latest IPS protections and protection descriptions (see ["Threat Prevention Scheduled Updates - Custom Threat Prevention" on page 262](#)).

Reverting to an Earlier IPS Protection Package

For troubleshooting or for performance tuning, you can revert to an earlier IPS protection package.

To revert to an earlier protection package

Step	Instructions
1	In the IPS section of the Threat Prevention Updates page, click Switch to version .
2	In the window that opens, select an IPS Package Version . Click OK .
3	Install the Threat Prevention Policy.

Reviewing New Protections

To see newly downloaded protections

In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy Tools**

Step	Instructions
1	Go to IPS Protections .

Step	Instructions
2	The Update Date column sorts the protections by date. By default, the latest protections are shown first. If not, click the column so that the latest protections are presented first.

Activating Protections

Each profile is a set of activated protections and instructions for what IPS does if traffic inspection matches an activated protection.

The procedures in this section explain how to change the action for a specified protection.

Activating Protections for All Profiles

To manually activate a protection in all profiles:

In SmartConsole, click the **Security Policies** view > **Threat Prevention** > in the **Custom Policy Tools** section, click **IPS Protections**.

Step	Instructions
1	Right-click on the protection and select the action that you want to apply to all the Threat Prevention profiles. Make sure that the action is on all profiles .
2	Click OK .
3	Close the Threat Prevention profile window.
4	Install the Threat Prevention policy.

Editing Protections for a Specific Profile

To edit a protection for a specific profile

Step	Instructions
1	In the Protections Browser , find the protection to activate.
2	Click Edit .
3	Right-click the relevant profile and click Edit . You can activate the protection for one profile and deactivate it for another profile. It will be active for some gateways and inactive for others. If the protection is inactive according to the policy, you can override the policy preference or change the policy criteria.

Step	Instructions
4	To override the settings for the specific protection, click Override with
5	Select the action to apply ▪ Prevent: Activate IPS inspection for this protection and run active preventions on the gateways to which this profile is assigned. ▪ Detect: Activate IPS inspection for this protection, tracking related traffic and events. ▪ Inactive: Do not enforce this protection.
6	Configure the Logging settings: ▪ Track - Define how administrators get notifications (log, alert, mail, or other options). ▪ Capture Packets - Captures packets relevant to the protection for further analysis.
7	Configure Additional Settings if relevant. For example, for the protection Web Login Form Password Brute Force Attempt, click Customize > Configure to configure the number of login attempts and login time.
8	Install the Threat Prevention Policy.

Removing Activation Overrides

You can remove the manually activated IPS protections and restore them to the profile settings. You can remove overrides on one protection, on selected protections or on all protections at the same time.

To remove IPS protection overrides on selected protections

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click IPS Protections . The IPS Protections page opens.
3	Click the protections in the applicable profile column. Note - Press CTRL to select more than one protection.
4	Right-click the highlighted cell or cells and select Restore to profile settings .
5	Select All Profiles or Displayed Profiles . A warning message opens.

Step	Instructions
6	Click Yes .
7	Install the Threat Prevention Policy.

To remove IPS protection overrides from all protections

Step	Instructions
1	In the IPS Protections page, go to Actions and select Profile Cleanup . The Profile Cleanup window opens.
2	In the Action area, select Remove all user modified , Clear all staging , or both.
3	In the Select Profiles area, select the profiles on which to operate these actions.
4	Click OK .
5	Install the Threat Prevention Policy.

Editing Core IPS Protections

To edit core protections

Step	Instructions
1	Go to Security Policies > Threat Prevention > Custom Policy Tools > IPS Protections . Note - To filter for core protections, select Type Core in the Filters pane.
2	Right-click a core protection and select Edit .
3	Configure the required settings.
4	Install the Threat Prevention policy.

IPS Protections Follow Up

The follow up mark lets you monitor specific IPS protections according to your selection. After you select the protections you want to monitor, you can filter for them in the IPS Protections page and not have to search for them again.

To view protections marked for follow up

In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy Tools**

Step	Instructions
1	Go to IPS Protections > Filters .
2	Select Follow Up .

You can mark individual protections for follow up or mark all updated protections for follow up in the IPS Updates page.

Manually Marking Protections for Follow Up

You can mark individual protections for Follow Up, which lets you quickly review the identified protections in the **IPS Protections** page. To make the Follow Up feature efficient, make sure to keep the list of marked protections as short as possible.

Mark newly downloaded protections and any protection that you want to monitor, but remember to remove protections from this list when you are more confident that you configured them in the best way for your environment. The longer the Follow Up list is, the more difficult it is to use it as a workable task list

To manually mark protections for follow up:

In the **IPS Protections** page, select one or more protections, right-click and select **Follow Protection** from the menu.

To unmark the protection, right-click the protection and clear **Follow Protection**.

Each time the IPS protections are updated, they are automatically marked for follow up. To unmark the protections for follow up, click **Unfollow Protections**. To unmark all marked protections, go to **Actions > Cleanup Options > Remove All Follow Up Flags**.



Note - You can add significant information about a protection in the protection's comment field. To add a comment to a protection, double-click a protection and enter your comment in the **Enter Protection Comment** field, below the protection's name. You can only add comments to ThreatCloud protections (and not Core protections). You can enter information such as the package version or date of update, which is useful because you can search for it at a later date.

Automatically Marking New Protections for Follow Up

Check Point provides new and updated protections as they become available (see ["Updating IPS Protections" on page 70](#)). To give you complete control over the process of integrating new IPS protections, you can have them automatically marked for Follow Up. This gives you time to evaluate the impact the protections have on your environment.

To have new protections marked automatically

In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy Tools**

Step	Instructions
1	In SmartConsole, select Security Policies .
2	Choose Threat Prevention > Custom Policy Tools > Updates > IPS .
3	Select Follow Protections .

Configuring Anti-Bot & Advanced DNS Settings

In the profile settings, go to **Anti-Bot & Advanced DNS Settings**.

In the **General** section, configure the Anti-Bot **UserCheck Settings**:

- **Prevent** - Select the UserCheck message that opens for a **Prevent** action
- **Ask** - Select the UserCheck message that opens for an **Ask** action

Configure Advanced DNS Settings

Enable/Disable Advanced DNS features:

- **DGA (Domain Generation Algorithm)** - This feature detects domains generated by a DGA, mainly used for C&C communication of malware.
- **DNS Tunneling (domain name based)** - The feature detects DNS tunnels that use domain names to transfer data.
- **NXNS Attack Detection** - This feature detects whether the DNS replies exhibit behavior consistent with NXNS Attack.

Protocol related features:

- **DNS over HTTPS/TLS (DoH/DoT)** - This feature allows the inspection of DNS traffic over HTTPS (DoH) and DNS traffic over TLS (DoT). This requires enabling HTTPS Inspection on the Security Gateway.
 - DoH supports both RFC 8484 and the non-RFC variant, which uses JSON to transfer the requests/responses (supported by a DNS provider, such as Google, Cloudflare, and others). DoH is supported on HTTP/1.2 and HTTP/2.

- DoT supports RFC 7858. To enable DoT traffic inspection, create a rule in the Access Control Rule Base and a rule in the HTTPS Inspection policy to allow and inspect the DoT traffic. For example:

Access Control Rule Base:

Source	Destination	Service	Action
Any	Any	DoT	Accept

HTTPS Inspection Rule Base:

Source	Destination	Service	Action
Any	Any	DoT	Inspect

Configuring a Malware DNS Trap

The Malware DNS trap works by configuring the Security Gateway to return a false (fabricated) IP address for known malicious hosts and domains. You can use the Security Gateway external IP address as the DNS trap address but:

- Do not use a Security Gateway address that leads to an internal network.
- Do not use the Security Gateway's internal management address.
- If the Security Gateway's external IP address is also the management address, select a different address for the DNS trap.

You can also add internal DNS servers to better identify the origin of malicious DNS requests.

Using the Malware DNS Trap, you can detect compromised clients by checking logs with connection attempts to the false IP address.

At the Security Gateway level, you can configure the DNS Trap according to the profile settings or as a specific IP address for all profiles on the specific Security Gateway.

Malware DNS Trap supports only IPv4.

Configuring the Malware DNS Trap parameters for the profile

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .

Step	Instructions
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click the profile, and click Edit .
4	From the navigation tree, click Malware DNS Trap .
5	Click Activate DNS Trap .
6	Enter the IP address for the DNS trap.
7	Optional: Add Internal DNS Servers to identify the origin of malicious DNS requests.
8	Click OK and close the Threat Prevention profile window.
9	Install the Threat Prevention policy.

Configuring the Malware DNS Trap parameters for a Security Gateway

Step	Instructions
1	In SmartConsole, go to the Gateways & Servers view and double-click the Security Gateway. The Security Gateway object editor opens and shows the General Properties page.
2	From the navigation tree, select Anti-Bot and Anti-Virus .
3	In the Malicious DNS Trap section, select one of these options: ▪ According to profile settings - Use the Malware DNS Trap IP address configured for each profile. ▪ IPv4 address - Enter an IP address to be used in all the profiles assigned to this Security Gateway
4	Click OK .
5	Install the policy.



Note - If you create an Exception which disables Anti-Bot for specific sources, the DNS Trap feature is not disabled. To disable DNS Trap for specific sources, create a new Threat Prevention profile for these sources with DNS Trap disabled.

Malware Prevention Using IP and Port Indicators

 **Note** - In R82.10, this feature is disabled by default.

IP Reputation Protection inspects traffic and blocks suspicious connections based on IP addresses.

This protection enforces security policies through an advanced analysis of traffic using IP addresses and ports to identify and block malicious traffic across multiple protocols.

The Security Gateway loads the latest threat intelligence from the cloud to maintain an up-to-date reputation feed.

This protection enables organizations to defend against well-known botnets, including Emotet, Dridex, Qbot, and others.

Known Limitations

- This feature supports only IPv4 traffic.
- This feature is disabled when the Security Gateway is **not** connected to the Internet.

How to Enable Malware Prevention Using IP and Port Indicators

Follow these steps in SmartConsole:

1. Enable the **Anti-Bot** Software Blade in the Security Gateway / Cluster object.
 - a. From the left navigation panel, click **Gateways & Servers**.
 - b. Double-click the Security Gateway / Cluster object.
 - c. On the **General Properties** page > on the **Threat Prevention** tab:
 - i. Select **Custom Threat Prevention**.
 - ii. Select **Anti-Bot & Advanced DNS**.
 - iii. Select the applicable option and click OK:
 - **According to the Threat Prevention Policy** (this is the default)
 - **Detect only**
 - d. Click **OK** to close the Security Gateway / Cluster object.
2. Enable the Protection **Reputation IPs**:
 - a. From the left navigation panel, click **Security Policies**.
 - b. In the top section **Threat Prevention**, click **Custom Policy**.

- c. In the bottom section **Custom Policy Tools** section, click **Protections**.
- d. In the top panel, click the protection **Reputation IPs**.
- e. In the bottom panel, click the tab **Activations**.
- f. Right-click the applicable Threat Prevention profile and click the applicable action:
 - **Ask**
 - **Prevent** (this is the default action in the default Threat Prevention profiles)
 - **Detect**

3. Install the Threat Prevention policy.

How to Disable Malware Prevention Using IP and Port Indicators



Note - In a Cluster, you must configure all the Cluster Members in the same way.

To disable this protection on a specific Security Gateway / Cluster without disabling the Anti-Bot Software Blade, modify the `$FWDIR/conf/ip_port_feed.conf` file:

1. Connect to the command line on the Security Gateway / each Cluster Member / Scalable Platform Security Group.
2. If the default shell is Gaia Clish / Gaia gClish, then go to the Expert mode:

```
expert
```

3. Back up the configuration file:

- On a Security Gateway / each Cluster Member:

```
cp -v $FWDIR/conf/ip_port_feed.conf{,_BKP}
```

- On a Scalable Platform Security Group:

```
g_all cp -v $FWDIR/conf/ip_port_feed.conf{,_BKP}
```

4. Edit the configuration file:

```
vi $FWDIR/conf/ip_port_feed.conf
```

5. For the parameter "enabled", configure the value "false":

```
{
  "enabled": false,
  "url": "https://ipport.iaas.checkpoint.com/ip-port-
feed.csv",
  "feed_size_limit": 10000,
  "policy_enabled": false,
  "ssl_validation_enabled": false
}
```



Important - To enable this feature again, configure the value "true".

6. Save the changes in the file and exit the editor.
7. On a Scalable Platform Security Group, copy the modified file to all Security Group Members:

```
asg_cp2blades $FWDIR/conf/ip_port_feed.conf
```

8. Apply the changes in **one** of these ways:

- Wait 5 minutes for the scheduled task to apply the changes automatically.
- Alternatively, run the following command to apply the changes immediately:

- On a Security Gateway / each Cluster Member:

```
ipp_feeder -f
```

- On a Scalable Platform Security Group:

```
g_all ipp_feeder -f
```

Troubleshooting

This process ensures that the feed configuration is correct and that any associated errors are identified and resolved.

1. Connect to the command line on the Security Gateway / each Cluster Member / Scalable Platform Security Group.
2. If the default shell is Gaia Clish / Gaia gClish, then go to the Expert mode:

```
expert
```

3. Make sure the configuration file `$FWDIR/conf/ip_port_feed.conf` contains only these lines:

Note - If this file was corrupted and you replaced its contents, then install the Threat Prevention policy.

```
{
  "enabled": true,
  "url": "https://ipport.iaas.checkpoint.com/ip-port-
feed.csv",
  "feed_size_limit": 10000,
  "policy_enabled": false,
  "ssl_validation_enabled": false
}
```

4. Run:

```
tp_collector_cli
```

and look for the errors from "App:MALWARE_IP_REP".

Example:

```
Time:      09:56:20
Instance:0
App:MALWARE_IP_REP
Session ended with error:1
Description:Update Failure.
Feed fetch failed.
Resource: "https://ipport.iaas.checkpoint.com/ip-port-feed.csv, Reason: HTTP response code
said error (Response code: 403).
```

5. To see debug messages:

a. Run:

```
ipp_feeder -d -f
```

b. Examine this log file:

```
$FWDIR/log/ipp_feeder.elg
```

Note - The feed SQL database is stored in this file: `$FWDIR/amw/iprep/IPReputation.db`

6. Run this command to confirm observables were fetched to the kernel table:

```
fw tab -t mal_ip_port_reputation
```


Configuring Anti-Virus Settings

You can configure Threat Prevention to exclude files from inspection, such as internal emails and internal file transfers.

These settings are based on the interface type (internal or external, as defined in SmartConsole) and traffic direction (incoming or outgoing).

Before you define the scope for Threat Prevention, you must make sure that your DMZ interfaces are configured correctly.

To check DMZ interface configuration

Perform this procedure for each interface that goes to the DMZ.

Step	Instructions
1	In SmartConsole, click Gateways & Servers and double-click the Security Gateway object. The Security Gateway properties window opens and shows the General Properties page.
2	From the navigation tree, click Network Management and then double-click a DMZ interface.
3	In the General page of the Interface window, click Modify .
4	In the Topology Settings window, click Override and Interface leads to DMZ .
5	Click OK and close the Security Gateway editor. Perform this procedure for each interface that goes to the DMZ.

In a Threat Prevention profile, you can configure these settings in the Anti-Virus page

- **UserCheck Settings:**
 - **Prevent** - Select the UserCheck message that opens for a **Prevent** action.
 - **Ask** - Select the UserCheck message that opens for an **Ask** action.
- **Protected Scope:**

- **Inspect incoming files from:**

Sends **only incoming** files from the specified interface type for inspection. Outgoing files are not inspected. Select an interface type from the list:

- **External** - Inspect incoming files from external interfaces. Files from the DMZ and internal interfaces are not inspected.
- **External and DMZ** - Inspect incoming files from external and DMZ interfaces. Files from internal interfaces are not inspected.
- **All** - Inspect all incoming files from all interface types.

- **Inspect incoming and outgoing files** - Sends all incoming and outgoing files for inspection.

- **Protocol:**

- **Web (HTTP/HTTPS)**
- **FTP**
- **SMB**
- **Mail (SMTP)** - Click **Mail** to configure the SMTP traffic inspection. This opens the **Mail** page of the Profile settings (see ["Configuring Mail Settings" on page 60](#)).

- **File Types:**

- **Process file types known to contain malware** - Select this option to scan the files defined by default. To see the default list of files, go to **Process specific file type families**, and click **Configure**.
- **Process all file types** - Select **Enable deep inspection scanning (impacts performance)**, if needed.
- **Process specific file types families**

To configure the specific file type families:

Step	Instructions
1	Click Configure .
2	In the File Types Configuration window, for each file type, select the Anti-Virus action for the file type.
3	Click OK to close the File Types Configuration window.

- **Archives:**

You can select **Enable Archive scanning (impacts performance)**. See ["Enabling Archive Scanning" below](#).

Enabling Archive Scanning

You can configure the Anti-Virus settings to enable archive scanning. The Anti-Virus engine unpacks archives and applies proactive heuristics. The use of this feature impacts network performance.

Select **Enable Archive scanning (impacts performance)** and click **Configure**:

Setting	Description
Stop processing archive after (seconds)	Sets the amount in seconds to stop processing the archive. The default is 30 seconds.
When maximum time is exceeded (action on file)	Sets to block or allow the file when the time for processing the archive is exceeded. The default setting is Allow .

Additionally Supported Protocols for Anti-Virus

In addition to HTTP, FTP, SMB and SMTP protocols, which you can select in the SmartConsole GUI, the Anti-Virus Software Blade also supports the IMAP and POP3 protocols.

Procedure to activate Anti-Virus inspection for IMAP and POP3 protocols

Step	Instructions
1	Connect to the command line on your Security Gateway.
2	Log in to the Expert mode.
3	Back up the <code>\$FWDIR/conf/malware_config</code> file: <code>cp -v \$FWDIR/conf/malware_config{, _BKP}</code>
4	Edit the <code>\$FWDIR/conf/malware_config</code> file: <code>vi \$FWDIR/conf/malware_config</code>
5	Change the value of the applicable parameter: ■ To activate IMAP protocol support: In the "[imap]" section, change the value of the parameter "imap_av_policy_on" from "0" to "1". ■ To activate POP3 protocol support: In the "[temp_for_av_profile]" section, change the value of the parameter "pop3_enabled" from "0" to "1".
6	Save the changes in the file and exit the editor.
7	In SmartConsole, install Threat Prevention Policy.

Maximum Security for Anti-Virus and Anti-Bot

Maximum Security (also known as Adaptive Hold) is a feature for Anti-Virus and Anti-Bot Software Blades introduced in R82.

A Security Gateway inspects each URL that internal clients access, and sends the URL to the RAD process for a classification verdict of malicious or benign. The RAD process queries the Check Point ThreatCloud for detailed information. There might be delays in responses from the RAD process due to resource shortages or cloud service overload. When this occurs, the blades may adapt their behavior:

- If the latency in RAD responses exceeds the accepted threshold, the Security Gateway gradually moves connections to background inspection.

- If the number of timeouts in the RAD responses exceeds the accepted threshold, the Security Gateway gradually moves connections to bypass mode.

Improved Behavior

The Maximum Security feature improves protection when the RAD responses are delayed or when there are connectivity issues between the Security Gateway and Check Point ThreatCloud.

To enable Maximum Security:

1. In SmartConsole, go to the **Manage & Settings** view > **Blades**.
2. Go to **Threat Prevention** and click **Advanced Settings**.
3. In the left navigation pane, go to **General**:
 - a. In the **Fail Mode** section, select **Allow all connections (Fail-open)**.
 - b. In the **Check Point Online Web Service** section, clear **Block connections when the web service is unavailable**.
4. Click **OK**.
5. Install the Threat Prevention policy.

For more information about the Maximum Security feature, see [sk181434](#)

The Threat Emulation Solution

Getting Started with Threat Emulation

1. If you use a Threat Emulation appliance, prepare the network and the Threat Emulation appliance, for local or remote emulation in the internal network

Step	Instructions
1	In SmartConsole, create the Security Gateway object for the Threat Emulation appliance.
2	If you run emulation on HTTPS traffic, configure the settings for HTTPS Inspection (see "HTTPS Inspection" on page 363).
3	Make sure that the traffic is sent to the appliance according to the deployment: ▪ Local Emulation - The Threat Emulation appliance receives the traffic. The appliance can be configured for traffic the same as a Security Gateway. ▪ Remote Emulation - The traffic is routed to the Threat Emulation appliance.

2. Enable the Threat Emulation Software Blade on the Security Gateway

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway / Cluster object. The Gateway Properties window opens.
2	In the General Properties > Network Security tab, select SandBlast Threat Emulation . The Threat Emulation First Time Configuration Wizard opens and shows the Emulation Location page.
3	Select the Emulation Location : ▪ ThreatCloud Emulation Service ▪ Locally on this Threat Emulation appliance ▪ Other Threat Emulation appliances - Click the + sign to add emulation appliances (you can select more than one appliance for the emulation).

Step	Instructions
4	Click Next. The Activate Threat Extraction window opens, with this checkbox selected: Clean potentially malicious parts from files (Threat Extraction) ▪ To activate Threat Extraction, keep this checkbox selected: ▪ If you do not want to activate Threat Extraction, clear this checkbox.
5	Click Next. The Summary page opens.  Note - If you selected the Emulation Location as Locally on this Threat Emulation appliance or Other Threat Emulation appliances, and you want to share Threat Emulation information with ThreatCloud, select Share attack information with ThreatCloud.
6	Click Finish to enable Threat Emulation (and if selected, Threat Extraction), and then close the First Time Configuration Wizard.
7	Click OK. The Gateway Properties window closes.

 **Note** - When a trial license is installed on the Security Gateway, a green "V" incorrectly appears next to the Threat Emulation Software Blade (in SmartConsole, go to the **Gateways & Servers** view > right-click the Security Gateway / Cluster object > click **Monitor**) > the **Device and License Information** window opens > **Device Status** > **Threat Emulation**). To see the correct license status, go to the **License Status** tab in the **Device and License Information** window.

Using Cloud Emulation

Files are sent to the Check Point ThreatCloud over a secure TLS connection for emulation. The emulation in the ThreatCloud is identical to emulation in the internal network, but it uses only a small amount of CPU, RAM, and disk space of the Security Gateway. The ThreatCloud is always up-to-date with all available operating system environments.

 **Best Practice** - For ThreatCloud emulation, it is necessary that the Security Gateway connects to the Internet. Make sure that the DNS and proxy settings are configured correctly in **Global Properties**.

3. Select deployment. See ["Selecting the Threat Emulation Deployment" on page 95](#).

4. Configure Threat Emulation settings on the Threat Prevention profile. See *"Configuring Threat Emulation Settings on the Security Profile" on page 98*.
5. Optional: Configure Threat Emulation settings on the Security Gateway. See *"Configuring Threat Emulation on the Security Gateway - Custom Threat Prevention" on page 105*
6. Configure advanced Threat Emulation settings. See *"Configuring Advanced Threat Emulation Settings - Custom Threat Prevention" on page 110*.
7. Install the Threat Prevention policy on the Security Gateway. If you use a Threat Emulation appliance, install the Threat Prevention policy on the Threat Emulation appliance as well.

For information about Private ThreatCloud, see the following Secure Knowledge articles:

- [sk149692](#): Private ThreatCloud
- [sk113332](#): Private ThreatCloud - Engine Updates
- [sk161534](#): How to configure Private ThreatCloud (PTC) on Scalable Platform Appliances

ThreatCloud Emulation


You can securely send files to the Check Point ThreatCloud for emulation. The ThreatCloud is always up-to-date with the latest Threat Emulation releases.

The new Threat Emulation engine uses Internet-connected sandboxes to prevent multi-stage attacks at the earliest stage. The full infection chain is analyzed and is presented in the MITRE ATT&CK Matrix visualization in the Threat Emulation report. The Internet-connected sandbox capability is supported on Threat Emulation AWS cloud platform and all Threat Emulation vectors: Web download, Mail Transfer Agent, Cloud Firewall SaaS, SandBlast Agent and APIs.

Sample ThreatCloud Emulation Workflow

1. The Security Gateway gets a file from the Internet or an external network.
2. The Security Gateway compares the cryptographic hash of the file with the database.
 - If the file is already in the database, no additional emulation is necessary
 - If the file is not in the database, it is necessary to run full emulation on the file
3. The file is sent over a TLS connection to the ThreatCloud.
4. The virtual computers in the ThreatCloud run emulation on the file.
5. The emulation results are sent securely to the Security Gateway for the applicable action.

Sample ThreatCloud Deployment

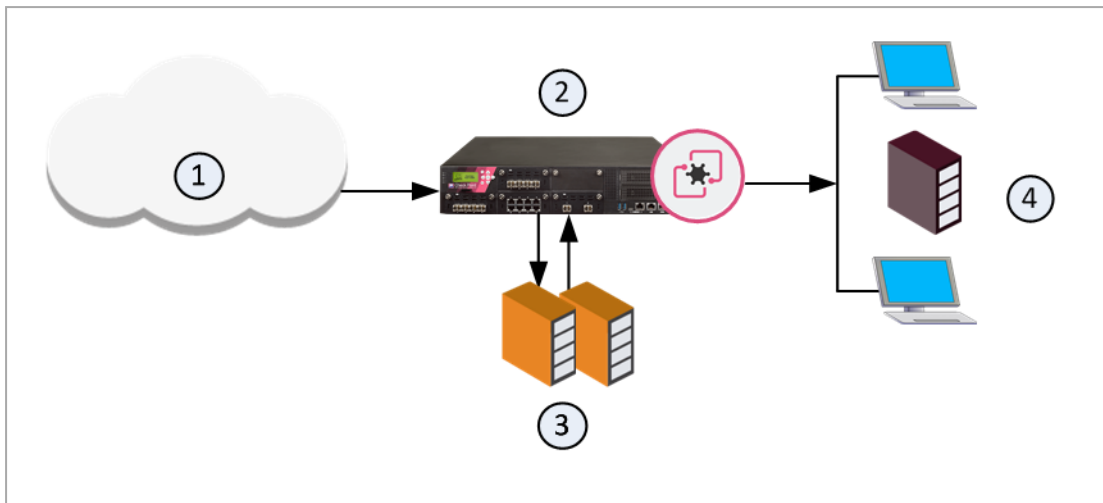

Item	Description
1	Internet and external networks
2	Perimeter Security Gateway
3	Check Point ThreatCloud servers
4	Computers and servers in the internal network

Threat Emulation Analysis Locations

You can choose a location for the emulation analysis that best meets the requirements of your company.

- **ThreatCloud** - You can send all files to the Check Point ThreatCloud for emulation. Network bandwidth is used to send the files and there is a minimum performance impact on the Security Gateway.
- **Threat Emulation Appliance in the Internal network** - You can use a Threat Emulation appliance to run emulation on the files, whether locally or on a remote appliance.


Local or Remote Emulation

You can install a Threat Emulation appliance in the internal network.

Sample workflow for local Threat Emulation

1. The Security Gateway receives the traffic, and aggregates the files.
2. The Security Gateway compares the cryptographic hash of the file with the database.


- The file is already in the database, no emulation is needed.
- If the file is not in the database, the virtual computers in the Security Gateway run full emulation on the file.

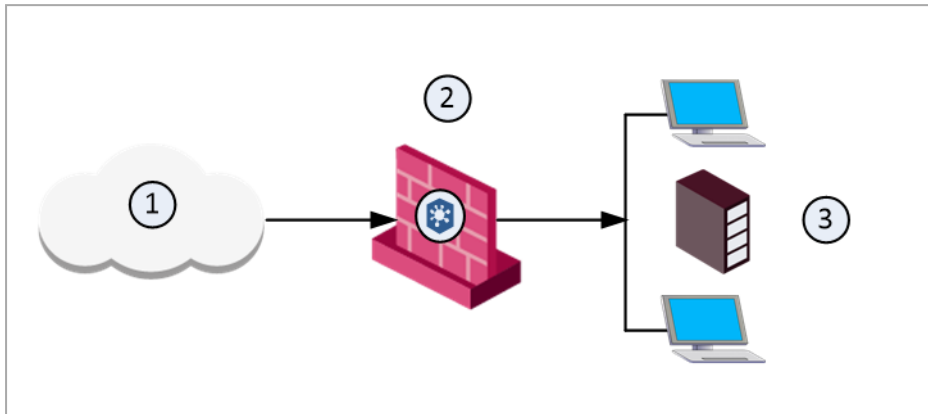

Item	Description
1	Internet and external networks
2	Security Gateway/Threat Emulation appliance
3	Computers and servers in the internal network

Sample workflow for Threat Emulation on a remote appliance

1. The Security Gateway aggregates the files, and the files are sent to the Threat Emulation appliance.
2. The Threat Emulation appliance compares the cryptographic hash of the file with the database. Files have unique cryptographic hashes. These file hashes are stored in a database after emulation is complete
 - If the file is already in the database, no emulation is needed.
 - If the file is not in the database, the virtual computers in the Threat Emulation appliance run full emulation on the file.

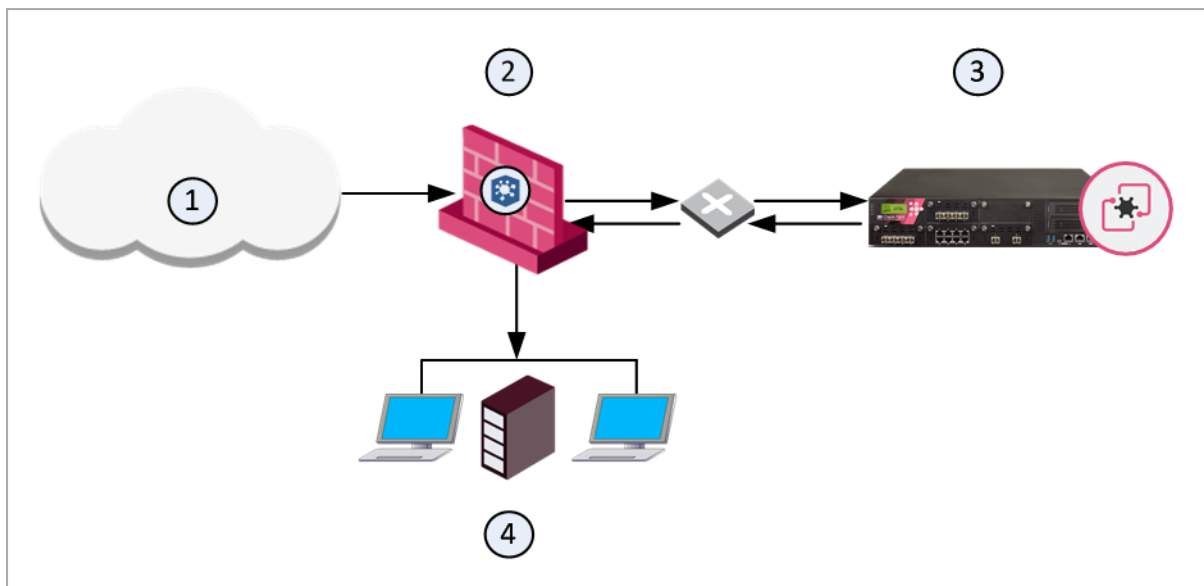

Item	Description
1	Internet and external networks
2	Perimeter Security Gateway
3	Threat Emulation Appliance
4	Computers and servers in the internal network

Selecting the Threat Emulation Deployment

What are my options to send traffic for emulation?


Option	Description
Inline	Traffic is sent for emulation before it is allowed to enter the internal network. You can use the Threat Prevention policy to block malware.
Monitor (SPAN/TAP)	You can use a mirror or TAP port to duplicate network traffic. Files are sent to the computer in the internal network. If Threat Emulation discovers that a file contains malware, the appropriate log action is done.
MTA (see "Configuring the Security Gateway as a Mail Transfer Agent" on page 178)	SMTP traffic goes to the Security Gateway, and is sent for emulation. The MTA acts as a mail proxy, and manages the SMTP connection with the source. The MTA sends email files to emulation after it closes the SMTP connection. When the file emulation is completed, the emails are sent to the mail server in the internal network.

To switch between the Inline and Monitor modes, see the [R82.10 Gaia Administration Guide](#)

Inline Deployments

The ThreatCloud or Threat Emulation appliance gets a file from the Security Gateway. After emulation is done on the file, if the file is safe, it is sent to the computer in the internal network. If the file contains malware, it is quarantined and logged. The computer in the internal network is not changed.


Sample Inline Emulation Workflow (Prevent Action)

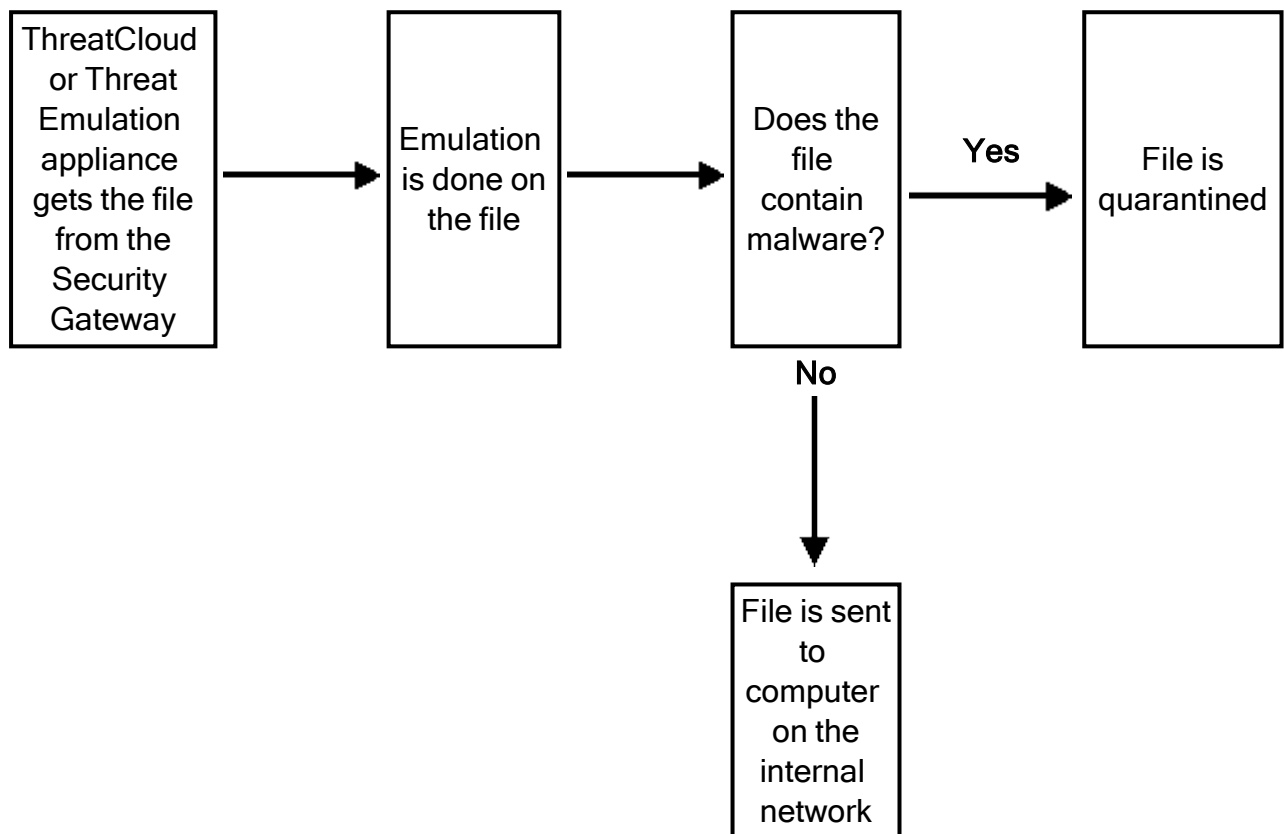

Monitor (SPAN/TAP) Deployments

The Security Gateway gets a file from the Internet or an external network and lets it enter the internal network. The Threat Emulation appliance receives a copy of the file and the original file goes to the computer in the internal network. The Threat Emulation appliance compares the cryptographic the file with the database. If the file is already in the database, then no additional emulation is necessary. If the file is not in the database, the virtual computers in the Threat Emulation appliance do emulation of the file.

If the file is identified as malware, it is logged according to the Track action of the Threat Prevention rule. Monitor deployments support only the **Detect** action.

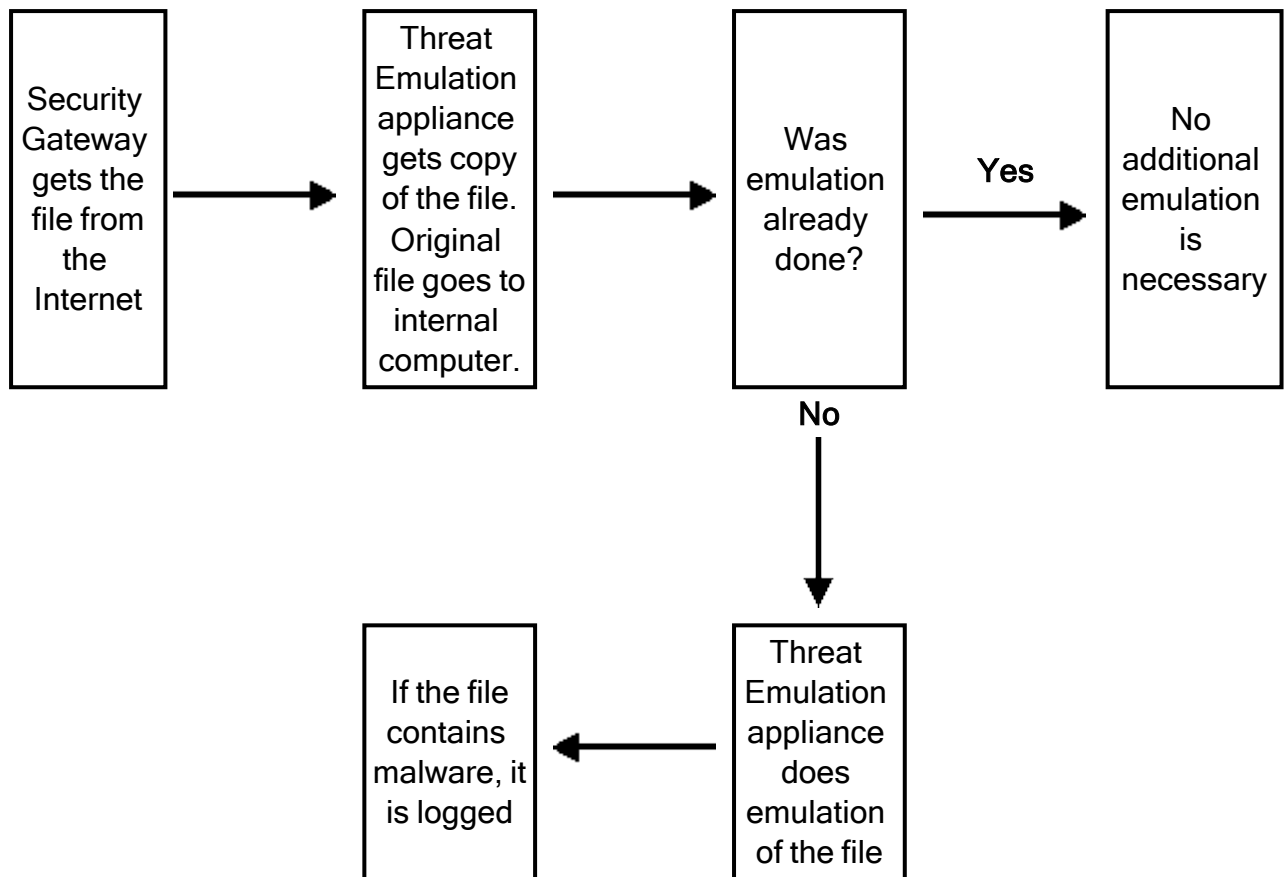Sample Monitor Emulation Workflow**Threat Emulation Deployments with a Mail Transfer Agent**

SMTP traffic goes to the Security Gateway, and is sent for emulation. The MTA acts as a mail proxy, and manages the SMTP connection with the source. The MTA sends email files to emulation after it closes the SMTP connection. When the file emulation is completed, the emails are sent to the mail server in the internal network.

For more information on how to work with the Mail Transfer Agent, see ["Configuring the Security Gateway as a Mail Transfer Agent" on page 178](#).

Configuring Threat Emulation Settings on the Security Profile

Before you define the scope for Threat Prevention, you must make sure that your DMZ interfaces are configured correctly.

To verify DMZ interface configuration

Step	Instructions
1	From the left navigation panel, click Gateways & Servers .
2	Double-click the Security Gateway object.
3	From the left navigation tree, click Network Management .
4	Double-click a DMZ interface.
5	In the General page of the Interface window, click Modify .
6	In the Topology Settings window, click Override and select Interface leads to DMZ .
7	Click OK .

Do this procedure for each interface that goes to the DMZ.

If there is a conflict between the Threat Emulation settings in the profile and for the Security Gateway, the profile settings are used.

To configure Threat Emulation settings for a Threat Prevention profile

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the Custom Policy Tools section, click Profiles . The Profiles page opens.
3	Right-click the profile, and click Edit .
4	From the navigation tree, go to Threat Emulation and configure these settings: a. "Threat Emulation General Settings" on the next page b. "Threat Emulation Environment" on page 101 c. "Threat Emulation Advanced Settings" on page 101
5	Click OK and close the Threat Prevention profile window.
6	Install the Threat Prevention policy.

-  **Important** - To emulate a file, the Security Gateway must receive the full file. Threat Emulation does not work on a file if only a part of it was downloaded.

Threat Emulation General Settings

On the **Threat Emulation > General** page, you can configure these settings:

UserCheck Settings

- **Prevent** - Select the UserCheck message that opens for a **Prevent** action
- **Ask** - Select the UserCheck message that opens for an **Ask** action

Protected Scope

Select an interface type and traffic direction option

- **Inspect incoming files from the following interfaces:**

Sends **only incoming** files from the specified interface type for inspection. Outgoing files are not inspected. Select an interface type from the list:

- **External** - Inspect incoming files from external interfaces. Files from the DMZ and internal interfaces are not inspected.
Example: A company's firewall is configured to inspect files received from external sources, such as emails or cloud services, while not interfering with internal file transfers.
- **External and DMZ** - Inspect incoming files from external and DMZ interfaces. Files from internal interfaces are not inspected.
Example: An organization's perimeter security system inspects files entering through both external connections and the Demilitarized Zone (DMZ), ensuring a thorough evaluation of potential threats.
- **All** - Inspect all incoming files from all interface types.
Example: A highly secure environment demands inspection of files from all possible interfaces, including both external and internal sources, to maintain a comprehensive defense against any potential malicious activity.

- **Inspect incoming and outgoing files** - Sends all incoming and outgoing files for inspection.

Example: In a scenario where bidirectional traffic monitoring is crucial, a network security system is configured to inspect both incoming and outgoing files, ensuring end-to-end protection against potential threats.

Protocols

Protocols to be emulated

- **Web (HTTP/HTTPS)**
- **FTP**
- **SMB**
- **Mail (SMTP/POP3)** - Click **Mail** to configure the SMTP traffic inspection by the Threat Emulation Software Blade. This links you to the **Mail** page of the Profile settings (see ["Configuring Mail Settings" on page 60](#)).

File Types

Here you can configure the Threat Emulation **Action** and **Emulation Location** for each file type scanned by the Threat Emulation Software Blade.

Select one of these file types

- **Process all enabled file types** - This option is selected by default. Click the blue link to see the list of supported file types. Out of the supported file types, select the files to be scanned by the Threat Emulation Software Blade.

Note - You can find this list of supported file types also in **Manage & Settings** view > **Blades > Threat Prevention > Advanced Settings > Threat Emulation > File Type Support**.

- **Process specific file type families** - Click **Configure** to change the action or emulation location for the scanned file types.

To change the emulation action for a file type, click the applicable action in the **Action** column and select one of these options:

- **Inspect** - The Threat Emulation Software Blade scans these files.
- **Bypass** - Files of this type are considered safe and the Software Blade does not do emulation for them.

To change the emulation location for a file type, click **Emulation Location** and select one of these options:

- **According to gateway** - The **Emulation Location** is according to the settings defined in the **Gateway Properties** window of each gateway.
- **Locally** - Emulation for these file types is done on the gateway. This option is not supported for R80.40.
- **ThreatCloud** - These file types are sent to the ThreatCloud for emulation.

 **Note** - If the emulation location selected in the profile is different than the emulation location configured on the Security Gateway, then the profile settings override.

Archives

Block archives containing these prohibited file types. Click **Configure** to select the prohibited file types. If a prohibited file type is in an archive, the gateway drops the archive.

Threat Emulation Environment

You can use the **Emulation Environment** window to configure the emulation location and images that are used for this profile:

- The **Analysis Locations** section lets you select: where the emulation is done.
 - To use the Security Gateway settings for the location of the virtual environment, click **According to the gateway**.
 - To configure the profile to use a different location of the virtual environment, click **Specify** and select the applicable option.
- The **Environments** section lets you select the operating system images on which the emulation is run. If the images defined in the profile and the Security Gateway or Threat Emulation appliance are different, the profile settings are used.

These are the options to select the emulation images:

- To use the emulation environments recommended by Check Point security analysts, click **Use Check Point recommended emulation environments**.
- To select other images for emulation, that are closest to the operating systems for the computers in your organization, click **Use the following emulation environments**.

Threat Emulation Advanced Settings

- **Emulation Connection Handling Mode** lets you configure Threat Emulation to allow or block a connection while it finishes the analysis of a file. You can also specify a different mode for SMTP and HTTP services.

Emulation Connection Handling Mode lets you configure Threat Emulation to allow or block a connection while it finishes the analysis of a file. The handling mode you select affects the form of the file that the user receives and the timing at which the user receives it. This section explains the difference between the Threat Emulation handling modes and the interaction between the Threat Emulation and Threat Extraction components with regards to the handling mode selected.

The first part of the section explains what happens when Threat Emulation works with Threat Extraction disabled and the second part explains how the Threat Emulation and the Threat Extraction components work together. You can also specify a different mode for SMTP and HTTP services. To configure the settings for the Threat Emulation handling mode, go to **Security Policies > Threat Prevention > Policy > right-click a profile > Threat Emulation > Advanced**.

Selecting an Emulation connection handling mode when Threat Extraction is disabled

If Threat Emulation reaches a verdict regarding a file within 3 seconds or less:

- If the file is benign, the gateway sends the original file to the user.
- If the file is malicious, the gateway blocks the page.

If Threat Emulation takes longer than 3 seconds to check the file:

- In **Rapid Delivery** mode - The gateway sends the original file to the user (even if it turns out eventually that the file is malicious).
- In **Maximum Prevention** mode - The user waits for Threat Emulation to complete. If the file is benign, the gateway sends the original file to the user. If the file is malicious, the gateway presents a Block page and the user does not get access to the file. Maximum Prevention mode gives you more security, but may cause time delays in downloading files.

In **Custom** mode- You can set a different handling mode for SMTP and HTTP. For example: you can set HTTP to Rapid Delivery and SMTP to Maximum Prevention.

Selecting an Emulation connection handling mode when Threat Extraction is enabled

With Threat Extraction, the gateway removes potentially malicious parts from downloaded/attached files and delivers them instantly to the user. Threat Emulation continues to run in the background, and examine the original files. Threat Extraction supports certain file types, primarily Microsoft Office files and PDFs, but not all file types, for example, executables.

- If Threat Emulation rules that the file is benign, the user gets access to the original file, using the link in the file itself or the email body banner, , without help desk overhead.
- If Threat Emulation rules that the file is malicious, the original file is blocked and the user only gets access to the cleaned file.

This way administrators can ensure maximum security, while not harming end-user productivity.

This behavior would be the same for both the Rapid Delivery and Maximum Prevention modes. Nevertheless, if you select Maximum Prevention, In CLI, you can configure an even more restrictive mode, such that:

- The user always waits for Threat Emulation to complete, even if the file is supported by Threat Extraction.
- The user receives the file only if the file is deemed benign, and if the file is supported by Threat Extraction, it will also be cleaned. To configure this mode, see [sk146593](#).

When Threat Extraction is enabled, but the file is not supported by Threat Extraction, the user is not able to receive a cleaned version of the file. The behavior therefore, will be the same as when Threat Extraction is disabled. In Rapid Delivery mode, the user gets the original file and in Maximum Prevention mode, the user waits for the Threat Emulation verdict.

★ **Best Practice** - If Threat Extraction is enabled, use Maximum Prevention as your handling mode (without the extra preventive CLI configuration). Because most files that users work with on a daily basis are documents, that are supported by Threat Extraction, the time penalty for waiting for the non-supported files is manageable. Users will be able to receive most files in a timely manner. If Threat Extraction is disabled, select the handling mode based on balancing your security needs versus time constraints.

If you use the **Prevent** action, a file that Threat Emulation already identified as malware is blocked. Users cannot get the file even in **Rapid Delivery** mode.

- **Static Analysis** optimizes file analysis by doing an initial analysis on files. If the analysis finds that the file is simple and cannot contain malicious code, the file is sent to the destination without additional emulation. Static analysis significantly reduces the number of files that are sent for emulation. If you disable it, you increase the percentage of files that are sent for full emulation. The Security Gateways do static analysis by default, and you have the option to disable it.
- **Logging** lets you configure the system to generate logs for each file after emulation is complete. If **Log every file scanned** is enabled, then every file that is selected in **Threat Emulation > General > File Types** is logged, even if no operation is performed on it. If **Log every file scanned** is disabled, malicious files are still logged.

Use Case

Configuring Threat Emulation location

Corp X is located in ThreatLand. The ThreatLand law does not allow you to send sensitive documents to cloud services which are outside of the country. The system administrator of Corp X has to configure the location for the Threat Emulation analysis, so that it is not done outside of the country.

To configure the Threat Emulation analysis location

Step	Instructions
1	In the Gateways & Servers view, double-click a Security Gateway, go to Threat Emulation > Analysis Location .
2	Select: ▪ Locally (not supported for R80.40 OR ▪ Remote Emulation Appliances. Click the + sign to select the applicable Security Gateways from the drop-down list.
3	Click OK .

 **Note** - You can also configure Threat Emulation analysis location in the profile settings. Go to **Security Policies > Threat Prevention > Profiles** > double-click a profile > **Threat Emulation > Emulation Environment > Analysis Location > Specify**.

Configuring Threat Emulation on the Security Gateway - Custom Threat Prevention

Changing the Analysis Location

When you run the Threat Emulation First Time Configuration Wizard, you select the location of the emulation analysis. You can use the **Threat Emulation** window in **Gateway Properties** to change the location.

 **Note** - The Threat Prevention policy defines the analysis location that is used for emulation (see "[Threat Emulation Environment](#)" on page 101).

To select the location of the emulation analysis

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation . The Threat Emulation page opens.
3	From the Analysis Location section, select the emulation location: ▪ According to the gateway - According to the gateway configuration. ▪ Specify: • Check Point ThreatCloud - Files are sent to the Check Point ThreatCloud for emulation. • Local Gateway - This Security Gateway does the emulation. • Remote Emulation Appliances - Remote appliances do the emulation. You can select one or more appliances on which the emulation is performed.
4	Optional: Select Emulate files on ThreatCloud if not supported locally . If files are not supported on the Threat Emulation appliance and they are supported in the ThreatCloud, they are sent to the ThreatCloud for emulation. No additional license is necessary for these files.
5	Click OK .
6	Install the policy on the Threat Emulation appliance.

Setting the Activation Mode

You can change the Threat Emulation protection **Activation Mode** of the Security Gateway or Threat Emulation appliance. The emulation can use the Prevent action that is defined in the Threat Prevention policy or only Detect and log malware.

To configure the activation mode

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation . The Threat Emulation page opens.
3	From the Activation Mode section, select one of these options: ▪ According to policy ▪ Detect only
4	Click OK , and then install the policy.

Optimizing System Resources

The **Resource Allocation** settings are only for deployments that use a Threat Emulation appliance. Threat Emulation uses system resources for emulation to identify malware and suspicious behavior. You can use the Resource Allocation settings to configure how much of the Threat Emulation appliance resources are used for emulation. When you change these settings, it can affect the network and emulation performance.

You can configure the settings for these system resources:

- Minimum available hard disk space (If no emulation is done on a file, the Threat Prevention **Fail Mode** settings determine if the file is allowed or blocked.
- Maximum available RAM that can be used for Virtual Machines.

If you plan to change the available RAM, these are the recommended settings:

- If the appliance is only used for Threat Emulation, increase the available RAM.
- If the appliance is also used for other Software Blades, decrease the available RAM.

To optimize the system resources for the Threat Emulation appliance

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation > Advanced . The Advanced page opens.
3	Stopping the emulation is determined when the Log storage mechanism automatically deletes log files. Therefore, in order to change the relevant configured value (Note - It also affects the Log's files deletion). Navigate to Logs > Local Storage > . And from When disk space is below <value> Start deleting old files , you can change the <value>.
4	To configure the maximum amount of RAM that is available for emulation, select Limit memory allocation . The default value is 70% of the total RAM on the appliance.
5	Optional. To change the amount of available RAM: 1. Click Configure. The Memory Allocation Configuration window opens. 2. Enter the value for the memory limit: ▪ % of total memory - Percentage of the total RAM that Threat Emulation can use. Valid values are between 20 - 90%. ▪ MB - Total MB of RAM that Threat Emulation can use. Valid values are between 512 MB - 1000 GB. 3. Click OK.
6	From When limit is exceeded traffic is accepted with track , select the action if a file is not sent for emulation: ▪ None - No action is done ▪ Log - The action is logged ▪ Alert - An alert is sent to SmartView Monitor
7	Click OK .
8	Install the Threat Prevention Policy.

Managing Images for Emulation

You can define the operating system images that Threat Emulation uses, for each appliance, and for each Threat Emulation profile. If different images are defined for a profile and for an appliance, Threat Emulation will use the images that are selected in both places. An image that is selected only for the appliance or for the profile will not be used for emulation.

To manage the images that the appliance uses for emulation

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation > Advanced . The Advanced page opens.
3	From the Image Management section, select the applicable option for your network: ▪ Use all the images that are assigned in the policy - The images that are configured in the Emulation Environment window are used for emulation. ▪ Use specific images - Select one or more images that the Security Gateway can use for emulation.
4	Click OK , and then install the policy.

Additionally Supported Protocols for Threat Emulation

In addition to HTTP, FTP and SMTP protocols, which you can select in the SmartConsole, the Threat Emulation Software Blade also supports the IMAP and POP3 protocols:

To activate IMAP protocol support

Step	Instructions
1	Connect to the command line on your Security Gateway.
2	Log in to the Expert mode.
3	Back up this file: <code>\$FWDIR/conf/malware_config</code> Run: <code>cp -v \$FWDIR/conf/malware_config{,_BKP}</code>
4	Edit this file: <code>\$FWDIR/conf/malware_config</code> Run: <code>vi \$FWDIR/conf/malware_config</code>

Step	Instructions
5	In the <code>[imap]</code> section, change the value of this parameter: <code>imap_av_policy_on</code> from "0" to "1"
6	Save the changes in the file and exit the Vi editor.
7	Install the Threat Prevention Policy.

To activate POP3 protocol support

Step	Instructions
1	Connect to the command line on the Security Gateway.
2	Log in to the Expert mode.
3	Back up the file: <code>\$FWDIR/conf/malware_config</code> Run: <code>cp -v \$FWDIR/conf/malware_config{,_BKP}</code>
4	Edit the file: <code>\$FWDIR/conf/malware_config</code> Run: <code>vi \$FWDIR/conf/malware_config</code>
5	In the <code>[temp_for_av_profile]</code> section, change the value of the parameter <code>pop3_enabled</code> from "0" to "1".
6	Save the changes in the file, and then exit the Vi editor.
7	Install the Threat Prevention Policy.

Configuring Advanced Threat Emulation Settings - Custom Threat Prevention

Updating Threat Emulation

Threat Emulation connects to the ThreatCloud to update the engine and the operating system images. The default setting for the Threat Emulation appliance is to automatically update the engine and images.

The default setting is to download the package once a day.

 **Best Practice** - Configure Threat Emulation to download the package when there is low network activity.

Update packages for the Threat Emulation operating system images are usually more than 2GB. The actual size of the update package is related to your configuration.

To enable or disable Automatic Updates for Threat Emulation

In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy > Custom Policy Tools**.

Step	Instructions
1	Go to Updates . The Updates page opens.
2	Under Threat Emulation , click Schedule Update .
3	Select or clear these settings: ▪ Enable Threat Emulation engine scheduled update ▪ Enable Threat Emulation images scheduled update
4	To configure the schedule for Threat Emulation engine or image updates, click Configure .
5	Configure the automatic update settings to update the database: ▪ To update every few hours, select Update every, and configure the number of hours, minutes, and seconds. ▪ To update daily, select Update at > Daily and select the hour of update. ▪ To update once or more for each week or month: 1. Select At and enter the time of day. 2. Click Days. 3. Click Days of week or Days of month. 4. Select the applicable days.
6	Click OK , and install the Threat Prevention policy.

Updating Threat Emulation Images Manually

Update packages for the Threat Emulation operating system images are usually more than several Gigabytes. The actual size of the update package is related to your configuration.

The default setting is to download the package once a week on Sunday. If Sunday is a work day, we recommend that you change the update setting to a non-work day.

To update the operating system image for Threat Emulation on a gateway

In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy > Custom Policy Tools**.

Step	Instructions
1	Go to Updates . The Updates page opens.
2	Under Threat Emulation , click Update Images .
3	Select a gateway. Click OK .
4	Install the Threat Prevention policy.

Fine-Tuning the Threat Emulation Appliance

You can change the advanced settings on the Threat Emulation appliance to fine-tune Threat Emulation for your deployment.

Configuring the Emulation Limits

To prevent too many files that are waiting for emulation, configure these emulation limit settings:

- Maximum file size (up to 100,000 KB)
- Maximum time that the Software Blade does emulation
- Maximum time that a file waits for emulation in the queue (for Threat Emulation appliance only)

If emulation is not done on a file for one of these reasons, the **Fail Mode** settings for Threat Prevention define if a file is allowed or blocked:

- **Allow all connections (Fail-open)** - All connections are allowed in a situation of engine overload or failure (default).
- **Block all connections (Fail-close)** - All connections are blocked in a situation of engine overload or failure.

If the Security Gateway is enabled as a Mail Transfer Agent - The Mail Transfer Agent settings define if a file is allowed or blocked (see ["Configuring the Security Gateway as a Mail Transfer Agent" on page 178](#)).

To configure the emulation limits

Step	Instructions
1	In SmartConsole, go to Manage & Settings > Blades > Threat Prevention > Advanced Settings . The Threat Prevention Engine Settings window opens.
2	Go to Threat Emulation tab > Emulation Limits .
3	Configure the Maximum file size for emulation and the Maximum file time in queue .
4	From When limit is exceeded traffic is accepted with track , select the action if a file is not sent for emulation: ▪ None - No action is done ▪ Log - The action is logged ▪ Alert - An alert is sent to SmartView Monitor
5	Click OK , and then install the policy.

Changing the Size of the Local Cache

When a Threat Emulation analysis finds that a file is clean, the file hash is saved in a cache. Before Threat Emulation sends a new file to emulation, it compares the new file to the cache. If there is a match, it is not necessary to send it for additional emulation. Threat Emulation uses the cache to help optimize network performance. We recommend that you do not change this setting.

To change the size of the local cache

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Threat Prevention > Advanced Settings . The Threat Prevention Engine Settings window opens.
2	Go to the Threat Emulation tab > Advanced Settings .
3	In Number of file hashes to save in local cache , configure the number of file hashes that are stored in the cache.
4	Click OK , and install the policy.

Configuring Threat Extraction Settings

To configure Threat Extraction settings for a Threat Prevention profile

Step	Instructions
1	From the left navigation panel, click Security Policies .
2	In the Custom Policy Tools section, click Profiles .
3	Right-click a profile and select Edit . The Profiles properties window opens.
5	In the left pane navigation tree, go to Threat Extraction , and configure these settings: ▪ <i>"Threat Extraction General Settings" below</i> ▪ <i>"Threat Extraction Advanced Settings" on page 117</i>
6	Click OK .
7	Install the Threat Prevention policy.

 **Note** - You can configure some of the Threat Extraction features in a configuration file, in addition to SmartConsole and the CLI. See [sk114613](#).

Threat Extraction General Settings

On the **Threat Extraction > General** page, you can configure these settings:

UserCheck Settings

- **Allow the user to access the original file**
- **Allow access to original files that are not malicious according to Threat Emulation**

Note - This option is only configurable when the Threat Emulation Software Blade is activated on the **General Properties** pane of the profile.

- **UserCheck Message**

You can create or edit UserCheck messages on the UserCheck page (see *"UserCheck in the Threat Prevention Policy" on page 424*).

Select a message to show the user when the user receives the clean file.

In this message, the user selects if they want to download the original file or not.

Selecting the success or cancellation messages of the file download

Step	Instructions
1	Go to Manage & Settings .
2	Select Blades > Threat Prevention .
3	Select Advanced Settings > UserCheck (see <i>"UserCheck in the Threat Prevention Policy" on page 424</i>).

You can customize a UserCheck message only for SMTP files. For HTTP files (supported on Security Gateways R80.30 and above), the message which the user gets is not customizable in SmartConsole. You can only customize it on the gateway.

Optional

To give the user access to the original email, you can add the **Send Original Mail** field in the Threat Extraction **Success Page**.

Step	Instructions
1	Go to Threat Prevention .
2	Select Custom Policy Tools > UserCheck > Threat Extraction > Success Page .
3	Right-click > Clone .
4	Click inside the message > Insert Field , and then select Send Original Mail . The Send Original Mail is added to the message body.

Protocol

- **Web (HTTP/HTTPS)** - Supported from Security Gateways R80.30 and above. To allow web support, enable HTTPS Inspection (see *"HTTPS Inspection" on page 363* > section *"Enabling HTTPS Inspection"*). By default, Threat Extraction web support works on these standard ports: HTTP - Port 80, HTTPS - Port 443, HTTPS Proxy - Port 8080.

To enable web support on other ports, create a new TCP service. In **General > Protocol** select **HTTP**, and in **Match By**, select **Customize** and enter the required port number.

**Notes:**

- When you enable Threat Extraction, web support is enabled automatically. To disable web support, clear this checkbox.
- After a file is scanned by the Threat Extraction Software Blade, the user receives a message on the action that was done on the file. To customize the message, see [sk142852](#).
- Threat Extraction web support applies to web downloads, but not web uploads.

- **Mail (SMTP)** - Click **Mail** to configure the SMTP traffic inspection by the Threat Extraction Software Blade. This links you to the Mail page of the Profile settings (see *"Configuring Mail Settings" on page 60*).

For information on storage of the original files, see *"Storage of Original Files" on page 124*.

Extraction Method

- **Extract potentially malicious parts from files** - Selected by default

Click **Configure** to select which malicious parts the Software Blade extracts. For example, macros, JavaScript, images and so on.

- **Convert to PDF** - Converts the file to PDF, and keeps text and formatting.



Best Practice - If you use PDFs in right-to-left languages or Asian fonts, preferably select **Extract files from potential malicious parts** to make sure that these files are processed correctly.

Extraction Settings

- **Process all files**

Selected by default.

- **Process malicious files when the confidence level is**

Set a Low, Medium, or High confidence level. This option is only configurable when the Threat Emulation Software Blade is activated in the **General Properties** pane of the profile.

File Types

- **Process all enabled file types** - This option is selected by default. Click the blue link to see the list of supported file types. Out of the supported file types, select the files to be scanned by the Threat Extraction Software Blade.



Note - You can find this list of supported file types also in **Manage & Settings** view > **Blades** > **Threat Prevention** > **Advanced Settings** > **Threat Extraction** > **Configure File Type Support**.

- **Process specific file type families**

Here you can configure a different extraction method for certain file types. Click **Configure** to see the list of enabled file types and their extraction methods. To change the extraction method for a file type, right-click the file type and select: bypass, clean or convert to PDF. You can select a different extraction method for Mail and Web.

**Notes:**

- Supported file types for web are: Word, Excel, PowerPoint and PDF.
- For e-mail attachments:
 - For `jpg`, `bmp`, `png`, `gif`, and `tiff` files - Threat Extraction supports only extraction of potentially malicious content.
 - For `hwp`, `jtd`, `eps` files - Threat Extraction supports only conversion to PDF.
 - For Microsoft Office and PDF files and all other file types on the list - Threat Extraction supports both extraction of potentially malicious content and conversion to PDF.
 - You can also configure supported file types in the configuration file. For explanation, see [sk112240](#).

Protected Scope

Threat Extraction protects incoming files from external interfaces and DMZ. The user cannot configure the protected scope.

Threat Extraction Advanced Settings

On the **Threat Extraction > Advanced** page, you can configure these settings:

- **Logging**
 - **Log only those files from which threats were extracted** - Logs only files on which an operation was performed (clean or convert).
 - **Log every file** - Every file that is selected in **Threat Extraction > General > File Types** is logged, even if no operation was performed on them.
- **Threat Extraction Exceptions**

- **Corrupted files**

Block or Allow corrupted files attached to the email or downloaded from the web. Corrupted files are files the Software Blade fails to process, possibly because the format is incorrect. Despite the incorrect format, the related application (Word, Adobe Reader) can sometimes show the content.

Block removes the corrupted file and sends the recipient a text which describes how the file contained potentially malicious content. You can block corrupt files if they are malicious according to Threat Emulation. If the action is block, you can deny access to the original corrupted file.

Allow lets the recipient receive the corrupted file.

- **Encrypted files**

Block or Allow encrypted files attached to the email or downloaded from the web.

Block removes the encrypted file and sends the recipient a text file which describes how the file contained potentially malicious content.

If the action is block, you can also deny access to the original encrypted file.

Allow lets the recipient receive the encrypted file.

Scenario 1: Excluding senders from scanning

Scanning takes time and resources, so if you know a source is safe, you may want to stop scanning the reports from this source.

Example:

- Control and Monitoring systems that send daily reports to IT departments.
- Reports sent by a Mail Relay server about spam emails that it stopped.

In SmartConsole, you can exclude specific senders from the Threat Extraction scanning.

To exclude a sender from the Threat Extraction scanning:

Step	Instructions
1	Go to Security Policies > Threat Prevention > Profiles .
2	Right-click the profile name and select Clone . The Clone Object window opens.
3	Enter a name for the cloned profile.
4	Click OK .

Step	Instructions
5	In the new profile, go to Mail > Exceptions > Extraction Exclusion/Inclusion > Scan all emails , and click Exceptions . The Exclude/Include Users window opens.
6	In the Senders section, click the + sign to add the senders to exclude from the Threat Extraction scan.

Scenario 2: Allowing digitally signed emails without scanning

The attorneys at the legal department in Corp X send and receive contracts and other legal documents signed with a digital signature. According to Corp X's Security Policy, the Threat Extraction blade scans all files received by the legal department. A digital signature must show the authenticity of a document. If the Threat Extraction blade scans the document, the digital signature can no longer prove the document's authenticity. The configuration, therefore, must allow digitally signed emails.

In the profile settings > **Mail > Exceptions > Threat Extraction Exceptions > Signed email attachments**, the default option is **Allow**. This configuration makes sure that when you receive a digitally signed email, it will be allowed with no scanning, so the form of the email does not change.

Scenario 3: Changing the Extraction Method

For security reasons, the IT department in Corp X changed the default extraction method in the Threat Prevention profile from **Extract potentially malicious parts from files** to **Convert to PDF**.

The economists in the Finance Department in Corp X receive certain files by email in excel formats, or download excel files from the Web, and must work on them in the files' original format. To keep the excel files in their original formats you must set the Threat Extraction to clean the files and not convert them to PDF.

To override the profile web extraction method

Step	Instructions
1	Go to File Types , select Process specific file type families and click Configure . The Threat Extraction Supported File Types window opens.
2	Go to the xslx row. Right-click the Mail Extraction Method and select Clean . Do the same for the Web Extraction Method .

Configuring Threat Extraction on the Security Gateway - Custom Threat Prevention

To configure the Threat Extraction blade on the Security Gateway

Step	Instructions
1	Make sure Threat Extraction is enabled on the gateway. For more information, see "Getting Started with Custom Threat Prevention" on page 35 .
2	In the Gateways & Servers view, double-click the Security Gateway object and click the Threat Extraction page.
3	Make sure the Activation Mode is set to Active .
4	In the Resource Allocation section, configure the resource settings.
5	Click OK .
6	Install the Access Control Policy.

In addition to configuring Threat Extraction on the gateway:

Enable Threat Extraction to scan one or all of these types of documents

- For Threat Extraction to scan e-mail attachments, enable the gateway as a Mail Transfer Agent (MTA) (see ["Configuring the Security Gateway as a Mail Transfer Agent" on page 178](#)).
- When Threat Extraction is enabled on the gateway, it is automatically enabled to scan web downloads. To disable web download scan:

Step	Instructions
1	Go to the Security Policies view > Threat Prevention > Custom Policy Tools > Profiles .
2	Double-click a profile > Threat Extraction > General > Protocol .
3	Clear this checkbox: Web (HTTP/HTTPS) .

- For Threat Extraction API support, in the gateway editor, go to **Threat Extraction** > **Web API** > **Enable API**.

Threat Extraction and Endpoint Security

When both the Threat Extraction blade and the SandBlast Agent for Browsers are activated on the network Security Gateway, a special configuration is required. Without this configuration, when you download a file, it can be cleaned twice, both by the Threat Extraction blade and by the SandBlast Agent.

To prevent this, the Security Gateway adds a digital signature to all the files cleaned by the Threat Extraction blade. When the SandBlast Agent intercepts a downloaded file. If the digital signature is verified successfully, SandBlast Agent does not clean the file, so the file is not cleaned twice.

For details on how to configure the digital signature on the Security Gateway and how to configure the Endpoint management, see [sk142732](#).

Configuring Threat Extraction in a Cluster

The cluster configuration is similar to Security Gateway configuration, except for specific instructions that are only relevant to cluster.

To configure Threat Extraction in a cluster

Step	Instructions
1	In the Gateways & Servers view, right-click the cluster and click edit.
2	Open the ClusterXL and VRRP page.
3	Select High Availability .

Notes:

- Only the High Availability mode is supported.
- The original files are synchronized between the Cluster Members. In case of a failure, there is still access to the original files.

Threat Extraction Statistics

To see Threat Extraction statistics

Step	Instructions
1	Connect to the command line on the Security Gateway with the Threat Extraction enabled.
2	Run these commands: ■ <code>cpview</code> ■ <code>cpstat scrub -f threat_extraction_statistics</code>

Using the Gateway CLI

The Security Gateway has a Threat Extraction menu

In this menu, you can:

- Control debug messages
- Get information on queues
- Send the initial email attachments to recipients
- Download updates automatically from the ThreatCloud

To use the Threat Extraction command line

Step	Instructions
1	Connect to the command line on the Security Gateway / each Cluster Member.
2	Log in to the Expert mode.
3	Run: <code>scrub</code>

The menu shows these options:

Option	Description
<code>debug</code>	Controls debug messages.

Option	Description
<code>queues</code>	Shows information on Threat Extraction queues. This command helps you understand the queue status and load on the mail transfer agent (MTA) and the <code>scrubd</code> daemon. The command shows: ■ Number of pending requests from the MTA to the <code>scrubd</code> daemon ■ Maximum number pending requests from the MTA to the <code>scrubd</code> daemon ■ Current number of pending requests from <code>scrubd</code> to <code>scrub_cp_file_convert</code> ■ Maximum number of pending requests from <code>scrubd</code> to <code>scrub_cp_file_convert</code>
<code>send_orig_email</code>	Sends original email to recipients. To send the original email get: ■ The reference number - Click on link in the email received by the user. ■ The email ID - Found in the Logs & Events logs or debug logs.
<code>bypass</code>	Bypasses all files. Use this command to debug issues with the <code>scrubd</code> (Threat Extraction) daemon. When you set <code>bypass</code> to active, requests from the mail transfer agent (MTA) to the <code>scrub</code> daemon are not handled. Threat Extraction is suspended. No files are cleaned.
<code>counters</code>	Shows and resets counters.
<code>update</code>	Manages updates from the download center.
<code>send_orig_file</code>	Sends original file by email.
<code>cache</code>	Shows and resets cache.
<code>backup_expired_mail</code>	Backs up expired mails to external storage.

Storage of Original Files

The Threat Extraction blade reconstructs files (cleans or converts files to PDF) to eliminate potentially malicious content. After the Threat Extraction blade reconstructs the files, the original files are saved on the gateway for a default period.

Mail attachments

Mail attachments are saved for a default period of 14 days.

To configure a different number of days for storage of mail attachments:

Step	Instructions
1	From the left navigation panel, click Gateways & Servers .
2	Open the Security Gateway / Cluster object.
3	From the left tree, click Threat Extraction .
4	Click Resource Allocation > Delete stored original files older than x Days .
5	Change the number of days as required. The maximum is 45 days.
6	Click OK .
7	Install the Threat Prevention Policy.

To save the files for a longer period, you must back them up to external storage (see ["Backup to External Storage" on the next page](#)).

Web downloads

Web downloads are saved for a default period of 2 days.

To configure a different number of days for storage of web downloads:

Step	Instructions
1	Connect to the command line on the Security Gateway / each Cluster Member.
2	Log in to the Expert mode.
3	Edit the <code>\$FWDIR/conf/scrub_debug.conf</code> file.
4	Search for <code>http_keep_original_duration</code> and change the value as required. Value can be between 2 and 45 days.

Step	Instructions
5	Save the changes in the file and exit the editor.

To save the files for a longer period, you must back them up to external storage (see ["Backup to External Storage" below](#)).

Backup to External Storage

When you run out of disk space, you can back e-mail attachments or web downloads to external storage.



Notes:

- In a cluster, you must configure all Cluster Members in the same way.
- End-users cannot access files on external storage. Only the administrator can access these files.

To back up original files to external storage

Step	Instructions
1	Connect to the command line on the Security Gateway / each Cluster Member.
2	Log in to the Expert mode.
3	Create the backup folder: <pre>mkdir /mnt/<local_backup_folder></pre> Example: <pre>mkdir /mnt/MyLocalBackupFolder</pre>
4	Mount the backup folder to the remote folder: <pre>mount -t cifs <remote_folder> /mnt/<local_backup_folder></pre> Example: <pre>mount -t cifs //MyServer/MyBackupFolder /mnt/MyLocalBackupFolder</pre> Best Practice - To preserve the mount configuration after reboot, configure a Scheduled Job to run the applicable "mount" command at startup (in Gaia Portal, go to System Management > Job Scheduler).
5	Edit the <code>\$FWDIR/conf/scrub_debug.conf</code> file: <pre>vi \$FWDIR/conf/scrub_debug.conf</pre>

Step	Instructions
6	Search for this section: :external_storage. 1. Change the <code>enabled</code> value from "0" to "1". 2. In the <code>external_path</code> parameter, write the full path to the local backup folder. 3. The <code>expired_in_days</code> parameter sets the backup date. The value you enter for this parameter specifies how many days before expiration the backup is performed. Example: <pre>:external_storage (:enabled (1) :external_path ("/mnt/MyLocalBackupFolder") :expired_in_days (5)</pre>
7	Configure the applicable values: 1. Change the <code>enabled</code> value from "0" to "1". 2. In the <code>external_path</code> parameter, write the full path to the local backup folder. 3. The <code>expired_in_days</code> parameter sets the backup date. The value you enter for this parameter specifies how many days before expiration the backup is performed. Example: <pre>:external_storage (:enabled (1) :external_path ("/mnt/MyLocalBackupFolder") :expired_in_days (5)</pre>
8	Save the changes in the file and exit the editor.

To test the backup manually

Run this command:

```
scrub backup_expired_mail <days for expired entries> <external_path>
```

In "<days for expired entries>" enter "0".

Configuring Zero Phishing Settings - Custom Threat Prevention

Zero Phishing uses two main engines:

- Real-time phishing prevention based on URLs.
- In-Browser Zero Phishing.

For more information about these two engines, see ["The Check Point Threat Prevention Solution" on page 25](#).

For information on how to enable Zero Phishing, see ["Getting Started with Custom Threat Prevention" on page 35](#).

To disable the Zero Phishing protection:

1. In SmartConsole, go to **Security Policies > Threat Prevention > Custom Threat Prevention > Custom Policy Tools > Profiles**.
2. Select the required profile.
3. In the **General Policy** page, clear **Zero Phishing**

To disable In-browser Zero Phishing:

1. In SmartConsole, go to **Security Policies > Threat Prevention > Custom Threat Prevention > Custom Policy Tools > Profiles**.
2. Select the required profile.
3. In the profile, go to the Zero Phishing page.
4. Clear the **In-browser Zero Phishing** checkbox.

Limitations:

- In-browser Zero Phishing does not support Internet Explorer.
- In-browser Zero Phishing does not support mirrored traffic (Mirror Port, Span Port, Tap mode).

You can block or allow sites that the Cloud Service is unable to classify as Phishing or Benign.

To block unclassified sites, run this command on the Security Gateway CLI:

```
zph att set inbrowser_block_unclassified_sites 1
```

To allow unclassified sites (default), run this command on the Security Gateway CLI:

```
zph att set inbrowser_block_unclassified_sites 0
```

Configuring Zero Phishing UserCheck Settings

Here you can select the UserCheck message that appears in case of a suspected phishing attempt.

Prevent - Select the UserCheck message that opens for the **Prevent** action. The default message is **Zero Phishing Blocked**.

You can create your own UserCheck messages for the **Prevent** action and configure their settings. To do this, go to **Security Policies > Threat Prevention > Custom Threat Prevention > Custom Policy Tools > UserCheck**, and in the **UserCheck** page, click **New**. For more information, see ["UserCheck in the Threat Prevention Policy" on page 424](#).

Configuring Zero Phishing Exceptions

To skip unnecessary scans of popular sites, we recommend to configure the Zero Phishing Software Blade to bypass specific popular sites.

To configure the Zero Phishing blade to bypass popular sites:

1. In SmartConsole, go to the **Security Policies** view > **Threat Prevention** > **Exceptions**.
2. Click **Add Exception** > **Below**.
3. Give a name to the rule.
4. In the **Protected Scope** column:
 - a. Click the "Plus" (+) button.
 - b. In the window that opens, go to **Import** > **Updatable Objects**.
 - c. Search for **Zero Phishing Bypass** and select it.
 - d. Click **OK**.
5. In the **Protection/Site/File/Blade** column:
 - a. Click the "Plus" (+) button.
 - b. From the drop-down menu in the window that opens, select **Blades**.
 - c. From the list of blades, select **Zero Phishing**.
6. In the **Action** column, select **Inactive**.
7. Install the Threat Prevention Policy.

**Notes:**

- For proper enforcement, make sure that this rule is the last rule under Global Exceptions.
- For any exception rule that contains **Zero Phishing** in the **Protection/Site/File/Blade** column, in the **Install On** column, you must select Security Gateways with Zero Phishing enabled.

The list of bypassed sites changes dynamically. To see the list, go to [sk179726](#).

Configuring Zero Phishing on the Security Gateway

On the Security Gateway object, you can configure the Security Gateway FQDN, which is required for the Zero Phishing in-browser functionality.

Select one of these two options:

- **Use automatic settings (recommended)**

When you enable Zero Phishing with the automatic settings, a new interface is created in the Security Gateway infrastructure in Gaia, called `tp_dummy` or `tp_dummy_X` (for VSX). This is a dummy interface which is intentionally isolated from external access. This interface has a constant IP address and allows Zero Phishing clients to communicate with the Security Gateway. When automatic settings are used, the client communicates with the Security Gateway using the FQDN `:zero-phishing.iaas.checkpoint.com`.

Automatic configuration additionally resolves the challenge of private network accessibility that arises during the inspection of HTTP pages for customers who manually added an FQDN which resolves to an IP address within the private address space.

- **Gateway FQDN (Fully Qualified Domain Name)**

If you select this option, make sure that the FQDN is registered in the DNS records of your DNS server.

Accessibility

Select the interfaces through which users can access the Zero Phishing portal. The default setting is **All interfaces**.

Zero Phishing enforcement for HTTPS traffic based on SNI

This feature enhances Zero Phishing capabilities when HTTPS Inspection is disabled. It categorizes HTTPS websites based on Server Name Indication (SNI) in TLS handshake to prevent access to phishing websites .

The feature is enabled by default.

You can control the Security Gateway behavior with the kernel parameter `zph_sni_enabled`:

- When `zph_sni_enabled=1`, the feature is enabled (default). The Zero Phishing Software Blade prevents access to phishing websites based on Server Name Indication (SNI) in TLS handshake when HTTPS Inspection is disabled.
- When `zph_sni_enabled=0`, the feature is disabled. The Zero Phishing Software Blade does not prevent access to phishing websites based on Server Name Indication (SNI) in TLS handshake when HTTPS Inspection is disabled.

To configure the applicable value for this kernel parameter temporarily (in the current session only - does not survive reboot), or permanently (survives reboot).



Important - In ClusterXL, you must configure all Cluster Members in the same way.

Deployment	Temporary Configuration	Permanent Configuration
Security Gateway ClusterXL	In Gaia Clish or in the Expert mode, run: <code>fw ctl set int zph_sni_enabled <VALUE></code>	In Gaia Clish or in the Expert mode, run: <code>fw ctl set -f int zph_sni_enabled <VALUE></code>
Security Group in ElasticXL Security Group in Maestro Security Group on Scalable Chassis	■ In Gaia Clish, run: <code>fw ctl set int zph_sni_enabled <VALUE></code> ■ In the Expert mode, run: <code>g_fw ctl set int zph_sni_enabled <VALUE></code>	■ In Gaia Clish, run: <code>fw ctl set -f int zph_sni_enabled <VALUE></code> ■ In the Expert mode, run: <code>g_update_conf_file \$FWDIR/modules/fwkernel.conf zph_sni_enabled=<VALUE></code>

To see the current value of this kernel parameter:

Deployment	Command
Security Gateway ClusterXL	In Gaia Clish, or in the Expert mode, run: <code>fw ctl get int zph_sni_enabled</code>
Security Group in ElasticXL Security Group in Maestro Security Group on Scalable Chassis	■ In Gaia Clish, run: <code>fw ctl get int zph_sni_enabled</code> ■ In the Expert mode: <code>g_fw ctl get int zph_sni_enabled</code>

HTML Smuggling Protection

HTML Smuggling is a stealthy technique that attackers use to deliver malicious files to a victim's device, by exploiting the browser's native capabilities. Instead of downloading files directly from an external server, which can be blocked by traditional security tools, HTML Smuggling embeds the payload inside specially crafted HTML or JavaScript files. When the user opens such a file in their browser, the malicious content is reconstructed locally and saved to the disk, effectively bypassing perimeter defenses like firewalls, proxies, and Security Gateways. This method is particularly dangerous because it can evade detection and facilitate sophisticated attacks, including ransomware or remote access Trojans, without triggering immediate alerts. Check Point's solution proactively detects and prevents HTML Smuggling attacks before they occur.

 **Note** - HTML Smuggling is not inherently malicious. Legitimate services like WhatsApp Web and Telegram Web use similar techniques for secure file sharing and messaging. These platforms use JavaScript in the browser to locally assemble and process files, allowing users to send and receive content without exposing the data to intermediate servers. For example, when a user drags and drops a file into a chat, the browser packages the data locally before securely transmitting it. While this approach improves privacy and performance, it shares technical similarities with attacker methods, making it challenging for traditional security systems to distinguish between legitimate and malicious use cases.

Activating HTML Smuggling Protection

HTML Smuggling Protection is automatically enabled when you enable both of these features:

- In-Browser Zero Phishing
 - In Custom Threat Prevention Policy, In-Browser Zero Phishing is enabled by default when you enable Zero Phishing.
 - In the Autonomous Threat Prevention Policy, go to **Settings > Advanced Settings** > Click the + sign, and from the drop-down menu, select **In-Browser Zero Phishing**. Click **Apply**.
- On the Security Gateway, enable HTTPS Inspection. See ["HTTPS Inspection" on page 363](#).

 **Note** - There is no manual way to enable HTML Smuggling Protection if you do not enable these features.

Disabling the HTML Smuggling Protection

To disable HTML Smuggling Protection:

1. Connect to the Security Gateway through SSH.
2. Change to **Expert** mode.

3. Run this command:

```
zph att set html_smuggling_injection 0
```

4. Verify that HTML Smuggling Protection is disabled:

From a client device, navigate to <https://zp-demo.com/HtmlSmuggling.html>

If HTML Smuggling Protection is disabled, this test site is allowed.

HTML Smuggling Allow List

HTML Smuggling Protection includes a pre-configured allow list for trusted sites, such as WhatsApp Web and Telegram Web.

To add URLs to the pre-configured allow list:

1. Connect to the Security Gateway through SSH.
2. Change to **Expert** mode.
3. Create a file in this location with this exact file name:

```
vi $FWDIR/conf/html_smuggling_white_domains_local.txt
```

4. Add the required URLs to the file.
5. Save the file and exit the editor.

Threat Prevention Protections Browser

The **Protections** browser displays the protection types of the Threat Prevention Software Blades, along with important information and usage indicators.

Column	Description
Protection	Displays the type of protection. The Malicious Activity and Unusual Activity protection types contain lists of protections. Double-click them to see the protections.
Blade	Displays the Software Blade to which the protection type belongs.
Engine	Specifies the ThreatSpect engine which handles the protection type.
Known today	Displays the number of currently known protections.
Last Update	Displays the date of last update to the protection type.

When you select a protection type, this information shows in the lower pane of the Protections Browser:

■ Summary

- **Confidence Level** - Specifies how confident the protection type is that recognized attacks are malicious.
- **Performance Impact** - Displays the performance impact of the protection type on the Security Gateway.
- **Description** - Provides details about the protection type.

■ Activations

Shows the activation setting of the protection type for each profile. To override the profile setting, right-click the action or select the **Actions** button in the top tool bar.

Threat Prevention Policy Insights

Threat Prevention Policy Insights simplifies the management of the Threat Prevention policy and profiles by providing administrators with actionable, environment-specific insights.

Check Point's cloud calculates the insights and they are displayed per Policy Layer.

Key benefits

- Reduces administrator effort with fast, one-click remediation actions.
- Provides customized insights based on analysis of traffic passing through the Security Gateways.
- Optimizes security and performance by
 - Detecting misconfigurations and configuration gaps
 - Identifying high CPU-consuming protections
 - Highlighting unoptimized Threat Prevention settings.

Supported Environments

- R82.10 and higher Standalone, High Availability, and Multi-Domain Security Management Servers.
- Any Check Point Security Gateway that is managed by a Security Management Server running R82.10 or higher.
- Threat Prevention Policy Insights is available only for environments hosted in the EU and US regions.

Limitations

- Threat Prevention Policy Insights is not supported for Smart-1 Cloud environments.
- Autonomous Threat Prevention is not supported.

Prerequisites

- Threat Prevention Policy Insights requires appropriate Check Point license. For detailed licensing information, contact [Account Services](#).

 **Note** - The license bundle for Threat Prevention Policy Insights includes license for Access Control Policy Insights. See [Access Control Policy Insights](#) for more information on this feature.

- Connect your Security Management Server to the Check Point Portal.

See [Connecting On-Premises Management Servers and Security Gateways to the Check Point Portal](#)

- Auto-update package (afw_AutoUpdate) version 82 or higher. The auto-update package is usually installed automatically when the version and Jumbo Hotfix Accumulator requirements are met. For manual installation instructions, see [sk183421](#).
- For Web SmartConsole users, Web SmartConsole Take 157 or higher.

Activating Threat Prevention Policy Insights

Note - Threat Prevention Policy Insights does not rely on **Log Sharing** or **Configuration**

Sharing. Instead, it uploads Threat Prevention logs, profiles, rules, and objects to the Check Point Portal for analysis.

Procedure

Notes:

- After the activation process, the log analysis may take several hours (up to 48 hours in large environments). Therefore, suggestions do not appear immediately. Some insights can appear within a few days, while others require a longer period of time to appear.
- The insight calculation process runs every two weeks.

Types of Insights

- Misconfiguration** - Recommendations regarding settings that are incorrect, incomplete, or not aligned with best practices.

For example: New IPS protections configured to Staging mode instead of according to the profile settings (Prevent).

- Policy Optimization** - Recommendations for streamlining security operations and enhancing security and performance.

For example: An exception rule that is frequently matched, allowing malicious content into the environment.

- **IPS Profile Tuning** - Recommendations for adjusting IPS configuration based on protection usage and system impact.

For example: Overriding default settings for specific IPS protections to better fit your environment.

- **ERM (External Risk Management)** - Recommendations based on emerging risk and response data, leveraging Check Point's ERM platform.

For example: Verifying whether external access to a server is necessary, when a server is identified as vulnerable based on a specific CVE.

For information on how to activate ERM, see [sk184656](#).

Click [here](#) for detailed information regarding each insight.

Managing Threat Prevention Policy Insights

To view insights for a Policy Layer

1. In SmartConsole, go to the **Security Policies** view > **Threat Prevention**.
2. Click the **Insights** button at the top-left corner.

Each category in the Threat Prevention Policy Insights window shows:

- The latest date on which the presented information is based.
- The number of suggestions in that category.

Confidence Level

Each insight is assigned a confidence level that reflects its reliability and accuracy.

For example: Longer observation periods provide more comprehensive data, increasing the reliability of the insight.

Severity

Each insight is assigned a severity level that reflects how critical it is to address the issue for maintaining the security of your environment.

Available Actions

For each insight, you can select one of these options:

- **Apply** - Accept the insight. Threat Prevention Policy Insights implements the change automatically.



Note - For certain suggestions, automatic remediation is not available. In these cases, you must follow the provided instructions to perform manual remediation.

Publish your session for the changes to take affect.

- **Decline** - Reject the insight. The insight moves to the **Declined suggestions** section.

To return a declined suggestion to the **Suggestions** section, select the suggestion and click **Undo decline**.

- **Decide later** - Move the suggestion to the **Decide later** section. This is useful for insights that require additional consideration.

In the **Decide later**, these are the available actions:

- **Apply** - Accept the change.
- **Decline** - Reject the change.
- **Move back** - Move the suggestion back to the **Suggestions** section.

Filtering Insights

You can filter the suggestions based on these categories:

- **Recommended** (the default option) - Suggestions with the highest calculated security impact and confidence.
- **All** - Valuable suggestions.

Note - Threat Prevention Policy Insights does not rely on **Log Sharing** or **Configuration Sharing**. Instead, it uploads Threat Prevention logs, profiles, rules, and objects to the Check Point Portal for analysis.

Exception Rules

If necessary, you can add an **exception** directly to a rule.

An exception sets a different **Action** to an object in the **Protected Scope** from the Action specified Threat Prevention rule.

In general, exceptions are designed to give you the option to reduce the level of enforcement of a specific protection and not to increase it.

Example

The Research and Development (R&D) network protections are included in a profile with the **Prevent** action.

You can define an exception which sets the specific R&D network to **Detect**.

For some Anti-Bot and IPS signatures only, you can define exceptions which are stricter than the profile action.

You can add one or more exceptions to a rule. The exception is added as a shaded row below the rule in the Rule Base.

It is identified in the **No** column with the rule's number plus the letter E and a digit that represents the exception number.

For example, if you add two exceptions to rule number 1, two lines will be added and show in the Rule Base as E-1.1 and E-1.2.

You can use exception groups to group exceptions that you want to use in more than one rule. See the **Exceptions Groups** Pane.

You can expand or collapse the rule exceptions by clicking on the minus or plus sign next to the rule number in the **No.** column.

To add an exception to a rule

Step	Instructions
1	In the Policy pane, select the rule to which you want to add an exception.
2	Click Add Exception .
3	Select the Above , Below , or Bottom option according to where you want to place the exception.
4	Enter values for the columns. Including these: ▪ Protected Scope - Change it to reflect the relevant objects. ▪ Protection - Click the plus sign in the cell to open the Protections viewer. Select the protection(s). Click OK.

Step	Instructions
5	Install the Threat Prevention Policy.



Note - You cannot set an exception rule to an inactive protection or an inactive blade.

Disabling a Protection on One Server

*Scenario: The protection Backdoor.Win32.Agent.AH blocks malware on windows servers. How can I change this protection to **detect** for one server only?*

In this example, create this Threat Prevention rule, and install the Threat Prevention policy:

Name	Protected Scope	Protection/Site	Action
Monitor Bot Activity	* Any	- N/A	A profile based on the Optimized profile. Edit this profile > go to the General Policy pane> in the Activation Mode section, set every Confidence to Prevent .
Exclude	Server_1	Backdoor.Win32.Agent.AH	Detect

To add an exception to a rule

Step	Instructions
1	In SmartConsole, go to Security Policies > Threat Prevention > Custom Policy .
2	Click the rule that contains the scope of Server_1 .
4	Right-click the rule and select New Exception .

Step	Instructions
5	Configure these settings: ▪ Name - Give the exception a name such as Exclude. ▪ Protected Scope - Change it to Server_1 so that it applies to all detections on the server. ▪ Protection/Site - Click + in the cell. From the drop-down menu, click the category and select one or more of the items to exclude.  Note - To add EICAR files as exceptions, you must add them as Allow List files. When you add EICAR files through Exceptions in Policy rules, the gateway still blocks them, if archive scanning is enabled. ▪ Action - Keep it as Detect. ▪ Track - Keep it as Log. ▪ Install On - Keep it as Policy Targets or select specified gateways, on which to install the rule.
6	Install the Threat Prevention Policy.

Creating an Exception for a Specific Protection, Site, File or Blade

To add a protection to an exception

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention .
2	From the navigation tree, select a Policy Layer .
3	Right-click the rule and select New Exception . An exception sub-rule is added to the policy.
4	Right-click the Protection/Site/File/Blade cell and select Add new items .


Step	Instructions
5	From the drop-down list, select the relevant category (IPS Protections, Anti-Bot & Anti-Virus Protections, User Applications, Whitelist Files, Blades) and then select the required item. The protections are added to the exception sub-rule.  Notes: ■ To add an exception to protections that do not appear in the SmartConsole interface (for example: DNS protections), go to the relevant log and add it from there. See "Creating Exceptions from Logs or Events" on page 143. ■ To add an exception for an IPS protection, you can also go to Security Policies > Threat Prevention > Custom Policy > IPS Protections, right-click a protection and select Add Exception.
6	Install Policy.

You can create a rule or exception for a specific blade for a specific website/URL because the Security Gateway is always the destination in non-transparent proxy mode.

In a transparent proxy mode, or while the traffic is inspected by a Security Gateway, this setup is not a challenge because the destination is configured in the Destination column, and the excluded blade is configured in the Protection/Site/File/Blade column. This is not possible in non-transparent mode because the destination is always the Security Gateway itself.

To create an exception for a specific Threat Prevention blade for a specific website in non-transparent proxy mode


1. Create a separate layer with a separate profile for each blade or a pair of blades (for example: Anti-Virus and Anti-Bot & Advanced DNS, or Threat Emulation and Threat Extraction):

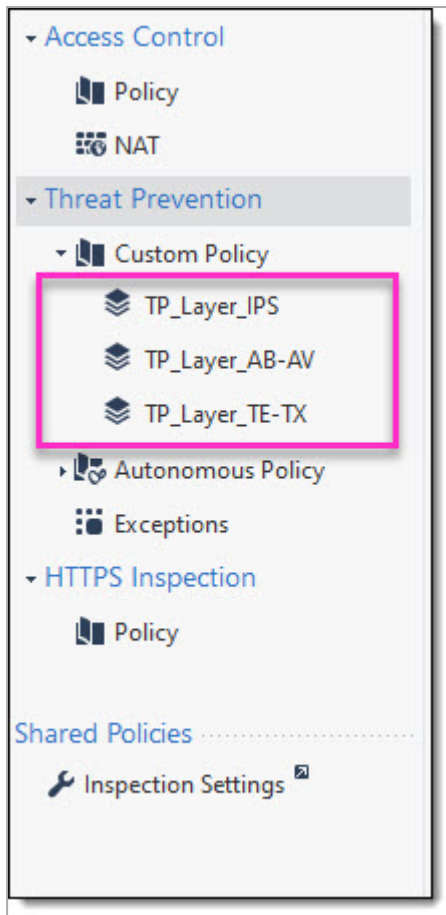


2. Create a separate profile for each layer and enable only the specific blade:

Name	Active Blades	Performance Impact	Severity	Confidence Level (Low/Medium/High)		
TP_Profile_TE-TX		High or lower	Low or above	Detect	Prevent	Prevent
TP_Profile_IPS		High or lower	Low or above	Detect	Prevent	Prevent
TP_Profile_AB-AV		High or lower	Low or above	Detect	Prevent	Prevent
Strict		High or lower	Low or above	Detect	Prevent	Prevent
Optimized		Medium or lower	Medium or above	Detect	Prevent	Prevent

3. Create a custom Application/Site for each layer. For instructions, refer to [sk165094](#):

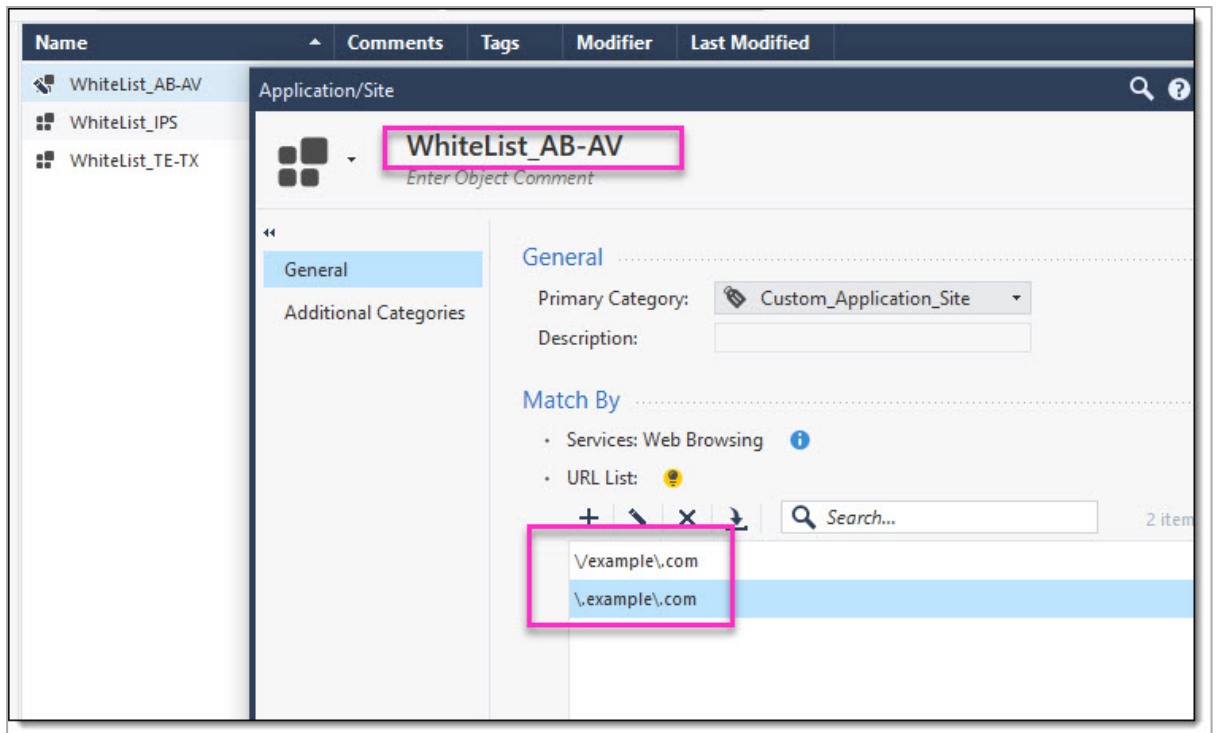

4. Create a Rule Base for each layer, and a different exception rule with the created Custom Application/Site in Protection/Site/File/Blade:

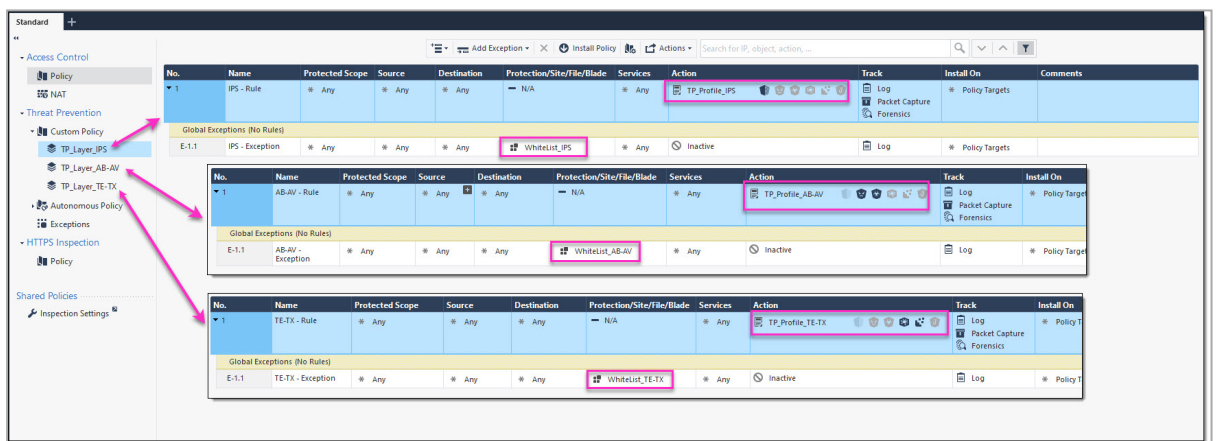

5. In the **Action** column, select **Detect** or **Inactive** to disable the applicable Threat Prevention Blade for the applicable websites/URLs.

 Notes:

- You must make changes to a Threat Prevention profile on all applicable profiles. For example: if you change the action for medium confidence protections on Threat Prevention blades, you must make the change in all profiles.
- We recommend to have as few layers as possible.
- When HTTPS Inspection and non-transparent proxy are enabled, the proxy IP address of the Security Gateway is matched as the destination in the HTTPS Inspection Rule Base.
- For a detailed explanation of the enforcement in Multiple-Layered Security Policies, see *"Threat Prevention Policy Layers" on page 44*.
- For information on how to configure a Security Gateway as HTTP/HTTPS proxy, see [sk110013](#).

Creating Exceptions from Logs or Events

In some cases, after evaluating a log or an event in the **Logs & Events** view, it may be necessary to update a rule exception in the SmartConsole Rule Base.

You can do this directly from within the **Logs & Events** view.

You can apply the exception to a specified rule or apply the exception to all rules that appear below **Global Exceptions**.

Static Anti-Bot and Anti-Virus protections, such as **Trojan.WIN32.Androxxgh0st.C** and **Backdoor.WIN32.Zegost.A**, are not visible in SmartConsole or ThreatCloud. They are compiled into the package and encrypted on the Security Gateway. This behavior prevents creating exception for these protections through the **Global Exceptions** section. Instead, you must create exceptions for these protections from a log.

To update a rule exception or global exception from a log

Step	Instructions
1	Click Logs & Events > Logs tab.
2	Right-click the log and select Add Exception .
3	Configure the settings for the exception.
4	In the New Exception Rule window: ■ To show the exception in the policy, click Go to. ■ Otherwise, click Close.
5	Install the Threat Prevention Policy.

Exception Groups

An exception group is a container for one or more exceptions. You can attach an exception group to all rules or only to selected rules. Exception groups simplify exception management, by allowing you to reuse the same exception group across multiple rules, instead of defining exceptions manually for each individual rule.

The **Exception Groups** pane shows a list of existing exception groups, the rules that use them, and any related comments.

The **Exception Groups** pane contains these options

Option	Meaning
New	Creates a new exception group.
Edit	Modifies an existing exception group.
Delete	Deletes an exception group.
Search	Searches for an exception group.

Global Exceptions

The system includes a predefined group named **Global Exceptions**. The system automatically adds exceptions that you define in the **Global Exceptions** group to every rule in the Rule Base. When you create a new exception group, you select which rule to attach it to.

Exception Groups in the Rule Base

Global exceptions and other exception groups are added as shaded rows below the applicable rule in the Rule Base. Each exception group is labeled with a tab that shows its name.

Exceptions within a group are identified in the **No** column using this syntax:

E - <rule number>.<exception number>, where E identifies the line as an exception.

For example

In a **Global Exceptions** group that contains two exceptions, all rules show the exception rows in the Rule Base **No** column as E-1.1 and E-1.2.



Note - The numbering of exceptions varies when you move the exceptions within a rule.

To view exception groups in the Rule Base:

Click the plus or minus sign next to the rule number in the **No.** column to expand or collapse the rule exceptions and exception groups.

Creating Exception Groups

When you create an exception group, you create a container for one or more exceptions. After you create the group, add the exception rules to it. You can then attach the group to the applicable rules in the Threat Prevention Rule Base.

To create an exception group

Step	Instructions
1	In SmartConsole, select Security Policies > Threat Prevention > Exceptions .
2	In the Exceptions section, click New .
3	In Apply On , configure how the exception group is used in the Threat Prevention policy. ▪ Manually attach to a rule - This exception group applies only when you add it to Threat Prevention rules. ▪ Automatically attached to each rule with profile - This exception group applies to all Threat Prevention rules in the specified profile. ▪ Automatically attached to all rules - This exception group applies to all Threat Prevention rules.
4	Click OK .
5	Install the Threat Prevention policy.

To add exceptions to an exception group

Step	Instructions
1	In SmartConsole, go to Security Policies > Threat Prevention > Exceptions .
2	In the Exceptions section, select the exception group to which you want to add an exception.
3	In the bottom pane of this page, click Add Exception .
4	Configure the settings for the new exception rule.
5	Install the Threat Prevention policy.

To add an exception group to a Rule Base

You can add exception groups to Threat Prevention rules.

This only applies to exception groups with **Manually attach to a rule** selected.

Step	Instructions
1	Click Security Policies > Threat Prevention > Custom Policy .
2	Right-click the rule and select Add Exception Group .
3	Select the applicable exception group from the list.
4	Install the Threat Prevention policy.

To create an exception for a specific file type, limited to a specific source and destination

Step	Instructions
1	In SmartConsole > go to Security Policies > Threat Prevention > Custom Policy > Custom Policy Tools > Profiles .
2	Click the  icon to create a new profile.
3	In the Threat Emulation or Threat Extraction pages, select General > File Types > Process specific file type families > Configure .
4	Right-click the applicable file type and select Bypass .
5	Go to the Exceptions tab, and in the top pane, click the  icon to create a new exception group.
6	In the Exception Group window that opens, select Automatically attached to each group with profile , and from the drop-down menu, select the newly created profile.
7	In the Security Policies view > Threat Prevention > Exceptions > select the newly created exception group.
8	At the bottom pane, create the required exception rule and define its Source and Destination .
9	Install the Threat Prevention policy.

Configuring Advanced Threat Prevention Settings

Threat Prevention Engine Settings - Custom Threat Prevention

This section explains how to configure advanced Threat Prevention settings that are in the Engine Settings window, including: inspection engines, the Check Point Online Web Service (ThreatCloud repository), internal email whitelist, file type support for Threat Extraction and Threat Emulation and more.

To get to the Engine Settings window, go to **Manage & Settings > Blades > Threat Prevention > Advanced Settings**.

The **Threat Prevention Engine Settings** window opens.

Fail Mode

Select the behavior of the ThreatSpect engine if it is overloaded or fails during inspection. For example, if the Anti-Bot inspection is terminated in the middle because of an internal failure. By default, in such a situation all traffic is allowed.

- **Allow all connections (Fail-open)** - All connections are allowed in a situation of engine overload or failure (default).
- **Block all connections (Fail-close)** - All connections are blocked in a situation of engine overload or failure.

By default, all Security Gateways that are controlled by a single Security Management Server, act the same according to the fail mode configuration of the Security Management Server.

Starting from R81.20, you can control the fail mode configuration for each individual Security Gateway by using the *malware_config* file.

Valid Values

Value	Description
by_policy	This is the default value. Fail mode is determined by the policy.
open	All connections to the specific Security Gateway are allowed in a situation of engine overload or failure.
close	All connections to the specific Security Gateway are blocked in a situation of engine overload or failure.

To set fail mode on a specific Security Gateway:

1. Connect to the command line on the Security Gateway.
2. Log in to the Expert mode.
3. Backup the current `$FWDIR/conf/malware_config` file:

```
[Expert@HostName]# cp $FWDIR/conf/malware_config
$FWDIR/conf/malware_config_ORIGINAL
```

4. Set the required fail mode for the specific Security Gateway:

To set the fail mode to be controlled by the policy, run:

```
[Expert@HostName]# sed -ie 's/^fail_close=.*$/fail_close=by_
policy/' $FWDIR/conf/malware_config
```

To set the fail mode to "open", run:

```
[Expert@HostName]# sed -ie 's/^fail_close=.*$/fail_close=open/'
$FWDIR/conf/malware_config
```

To set fail mode to "close", run:

```
[Expert@HostName]# sed -ie 's/^fail_close=.*$/fail_close=close/'
$FWDIR/conf/malware_config
```

Check Point Online Web Service

The Check Point Online Web Service is used by the ThreatSpect engine for updated resource categorization. The responses the Security Gateway gets are cached locally to optimize performance. Access to the cloud is required if the response is not cached. Resource classification mode determines if the connection is allowed or suspended while the Security Gateway queries the Check Point Online Web Service.

- Block connections when the web service is unavailable:
 - When selected, connections are blocked when there is no connectivity to the Check Point Online Web Service.
 - When cleared, connections are allowed when there is no connectivity (default).
- Resource categorization mode.

These settings are relevant for Anti-Virus, Anti-Bot and Zero Phishing.

- **Background - connections are allowed until categorization is complete** - When a connection cannot be categorized with a cached response, an uncategorized response is received. The connection is allowed, and in the background, the Check Point Online Web Service continues the categorization procedure. After the classification is complete, a "Detect" log is generated. The log includes this description: "Connection was allowed because background classification mode was set". The response is cached locally for future requests (default). This option reduces latency in the categorization process.
- **Hold - connections are blocked until categorization is complete** - When a connection cannot be categorized with the cached responses, it remains blocked until the Check Point Online Web Service completes categorization.
- **Custom - configure different settings depending on the service** - Lets you set different modes for Anti-Virus, Anti-Bot and Zero Phishing. For example, click **Customize** to set Anti-Bot to Hold mode and Anti-Virus and Zero Phishing to Background mode.

If you change Background mode to Hold mode, the Security Gateway holds the file and does not send it to the client browser. The Browser shows the file as still being downloaded, but the download is stuck at some point. The Security Gateway continues the download only after the scan is complete or if a timeout occurred at the Security Gateway. If the file is malicious, the Security Gateway stops sending the file.

 **Note** - If the "Prevent" action is used in the Threat Prevention policy, then a file that Threat Emulation identified as malware in the past, is blocked. The file will not be sent to the destination even in the "Background" mode.

Connection Unification

Gateway traffic generates a large amount of activity. To make sure that the amount of logs is manageable, by default, logs are consolidated by session. A session is a period that starts when a user first accesses an application or a site. During a session, the gateway records one log for each application or site that a user accesses. All activity that the user does within the session is included in the log. For connections that are allowed or blocked the Anti-Bot, Threat Emulation, and Anti-Virus, the default session is 10 hours (600 minutes).

To adjust the length of a session

Step	Instructions
1	Go to Manage & Settings > Blades > Threat Prevention > Advanced Settings > General > Connection Unification > Session unification timeout (minutes) .
2	Enter the required value.
3	Click OK .

Configuring Anti-Bot Whitelist

The Suspicious Mail engine scans outgoing emails. You can create a list of email addresses or domains whose internal emails are not inspected by Anti-Bot.

To add an email address or domain whose internal emails are not scanned by Anti-Bot

Step	Instructions
1	Go to the Manage & Settings > Blades > Threat Prevention > Advanced Settings > Anti-Bot .
2	Click the + sign.

In this window, you can also edit or remove the entries in the list.

Selecting Emulation File Types

You can select the file types that are sent for emulation for all the Threat Prevention profiles. Each profile defines an **Inspect** or **Bypass** action for the file types.

To select Threat Emulation file types that are supported in Threat Prevention profiles

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades .
2	From the Threat Prevention section, click Advanced Settings . The Threat Prevention Engine Settings window opens.
3	From the Threat Emulation Settings section, click Configure file type support . The File Types Support window opens.
4	Select the file types that are sent for emulation. By default The Emulation supported on column shows the emulation environments that support the file type.
5	Click OK and close the Threat Prevention Engine Settings window.
6	Install the Threat Prevention policy.

Configuring Advanced Engine Settings for Threat Extraction

Advanced engine settings let you configure file type support and mail signatures for the Threat Extraction.

To configure file type support

Step	Instructions
1	Click the Manage & Settings view > Blades > Threat Prevention > Advanced Settings . The Threat Prevention Engine Settings window opens.
2	In Threat Extraction, click Configure File Type Support . The Threat Extraction Supported File Types window opens.
3	From the list select the file types which the Threat Extraction blade supports.
4	Click OK .

To configure mail signatures

Step	Instructions
1	In the Threat Prevention Engine Settings window > Threat Extraction, click Configure Mail Signatures. The Threat Extraction Mail Signatures window opens. Use this window to configure text for: ▪ Mail signatures for attachments with potential threats extracted The first signature is always attached to mail that has had threats extracted. A link to the original files is added if the email recipient is allowed to access it. The link opens the UserCheck Portal. The portal shows a list of attachments the recipient can download. ▪ Mail signatures for unmodified attachments You can click the Insert Field button to insert a reference ID into the signature text. Use this ID to send the file to the recipient. You can also find the ID in the logs. On the Security Gateway, run the command: <pre>scrub send_orig_email</pre>
2	Click OK .

Snort Signature Support

SNORT is a popular, open source, Network Intrusion Detection System (NIDS). For more information about SNORT see snort.org.

Check Point supports the use of SNORT rules as both the GUI and the SmartDomain Manager API's options.

When you import a SNORT rule, it becomes a part of the IPS database.

To perform these actions on a Check Point Management Server

Step	Instructions
1	Import existing SNORT rules from a file.
2	After import and conversion: 1. SNORT Protection names are SNORT imported: <i><Value of the 'msg' field in the original SNORT rule></i> See "Creating SNORT Rule Files" on page 162. 2. SNORT Protections get these attributes automatically: ■ Performance Impact - High ■ Severity - High ■ Confidence Level - Low or Medium
3	Delete the existing SNORT rules.


Importing SNORT Protection Rules to the Security Management Server

Make sure you have the SNORT rule file. It holds SNORT rules and usually has the extension: `.rules`.

In a Multi-Domain Security Management environment, import SNORT rules to the Security Management Server. Then assign Global policy to the Domain Management Servers. This downloads the new SNORT protections to the Domain Management Servers.

To import SNORT Protection rules to the Security Management Server

Step	Instructions
1	Connect with SmartConsole to the Security Management Server that manages the applicable Security Gateway or Security Cluster.
2	In SmartConsole, go to Security Policies > Threat Prevention > Custom Policy

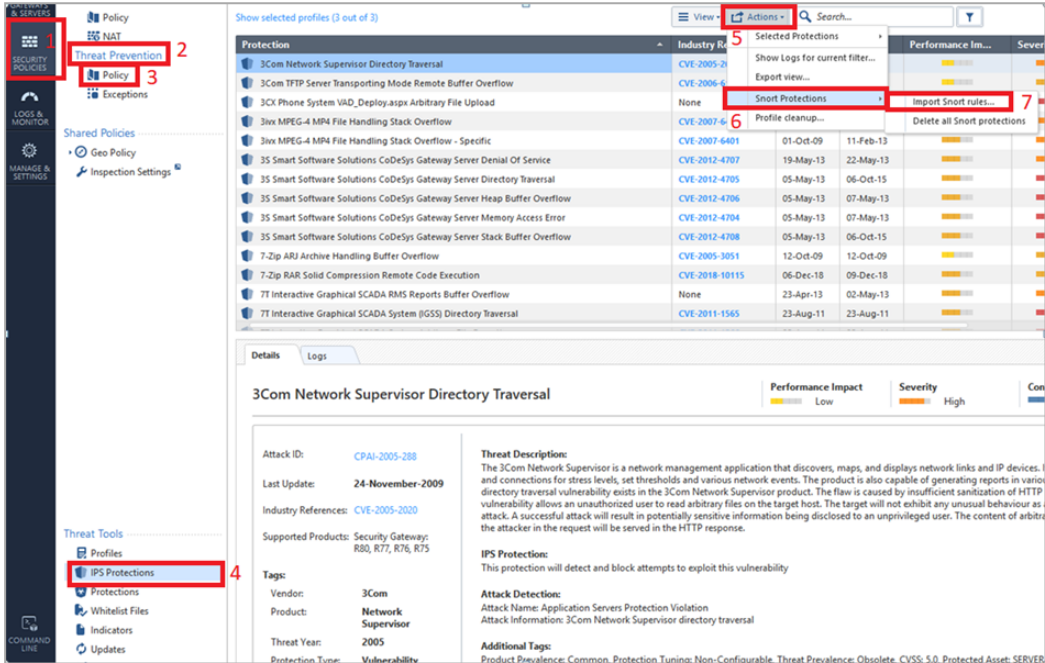
Step	Instructions
3	In the bottom section Custom Policy Tools , click IPS Protections .
4	From the top toolbar, click Actions > Snort Protections > Import Snort rules .
5	Select the file with the SNORT rules and click Open. The tool converts the rules to Check Point syntax and updates the protections database. Important - SmartConsole shows the converted SNORT rules as IPS protections whose names start with "Snort imported". 
6	Publish the SmartConsole session.
7	Install the Threat Prevention Policy on the applicable Security Gateway or Security Cluster.

To override the profile settings for a specific SNORT protection, see Action on SNORT Protection Rules, see ["Action on SNORT Protection Rules" on page 157](#).

Deleting SNORT Protection Rules from the Security Management Server

To delete SNORT protection rules from the Security Management Server

Step	Instructions
1	Connect with SmartConsole to the Security Management Server that manages the applicable Security Gateway or Security Cluster.

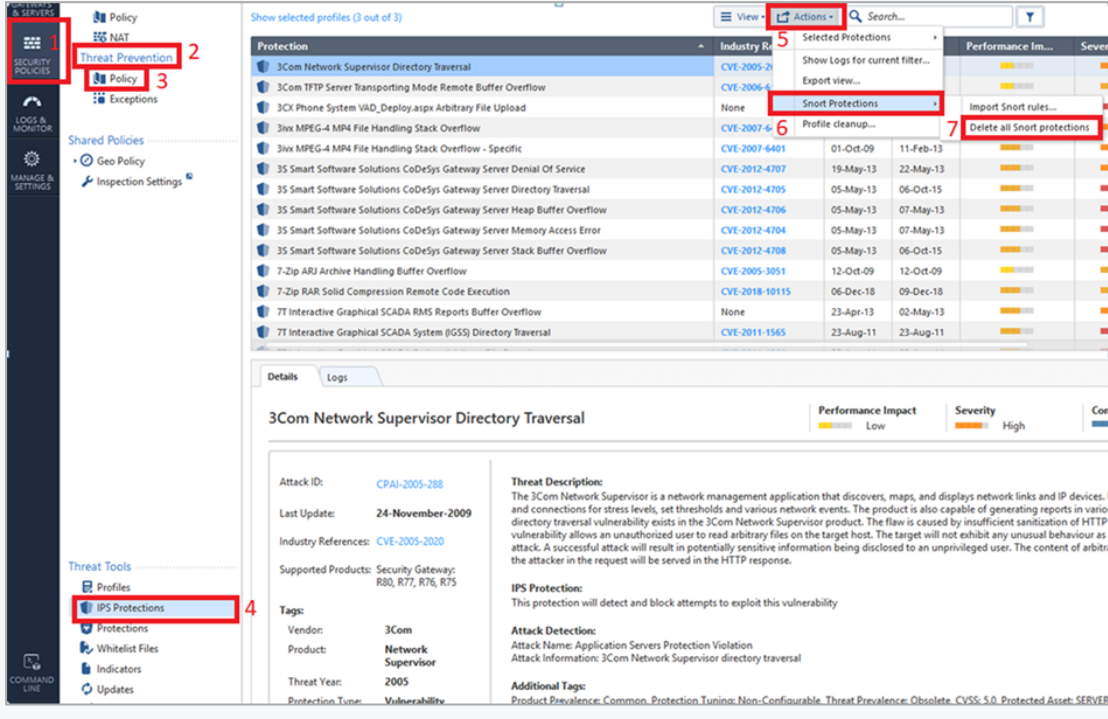Step	Instructions
2	From the left navigation panel, go to Security Policies > Threat Prevention > Custom Policy .
3	In the bottom section Custom Policy Tools , go to IPS Protections .
4	From the top toolbar, click Actions > Snort protections > Delete all snort protections .
	
5	Publish the SmartConsole session.
6	Install the Threat Prevention Policy on the applicable Security Gateway or Security Cluster.

Importing SNORT Protection Rules to the Multi-Domain Server


Make sure you have the SNORT rule file. It holds SNORT rules and usually has the extension: **.rules**.

In a Multi-Domain Security Management environment, import SNORT rules to the Multi-Domain Server. Then assign Global policy to the Domain Management Servers. This downloads the new SNORT protections to the Domain Management Servers.

To import SNORT rules to the Multi-Domain Server

Step	Instructions
1	Connect with SmartConsole to the Multi-Domain Server to the MDS context.

Step	Instructions
2	From the left navigation panel, click Multi-Domain > Domains .
3	Right-click on the Global Domain and select Connect to domain .
4	From the left navigation panel, click Security Policies .
5	Open the applicable global policy.
6	In the top section, go to Threat Prevention > Custom Policy .
7	In the bottom section Custom Policy Tools , click IPS Protections .
8	From the top toolbar, click Actions > Snort Protections > Import Snort rules .
9	Select the required file with the SNORT rules and click Open . The tool converts the rules to Check Point syntax and updates the protections database.
10	Publish the SmartConsole session.
11	Close the SmartConsole connected to the Global Domain.
12	From the left navigation panel, click Multi Domain > Global Assignments .
13	Reassign the Global Policy to the Local Domains.

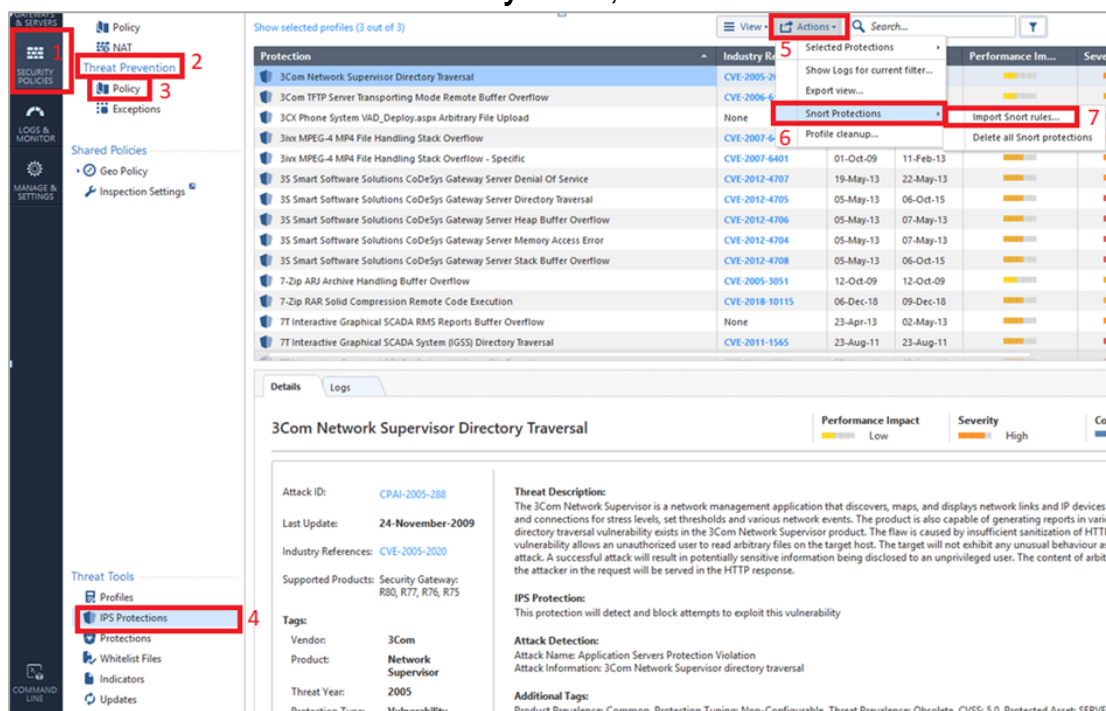


Step	Instructions
14	Connect with SmartConsole to the applicable Domain Management Server that manages the applicable Security Gateway or Security Cluster.
15	Install the Threat Prevention Policy on the applicable Security Gateway or Security Cluster.

To override the profile settings for a specific SNORT protection, see ["Action on SNORT Protection Rules" on the next page](#)).

Deleting SNORT Protection Rules from the Multi-Domain Server

To delete SNORT protection rules from the Multi-Domain Server:

Step	Instructions
1	Connect with SmartConsole to the Multi-Domain Server to the MDS context.
2	From the left navigation panel, click Multi Domain > Domains .
3	Right-click on the Global Domain and select Collect to domain .
4	From the left navigation panel, click Security Policies .
5	Open the applicable global policy.
6	In the top section Threat Prevention , click Policy .
7	In the bottom section Custom Policy Tools , click IPS Protections .



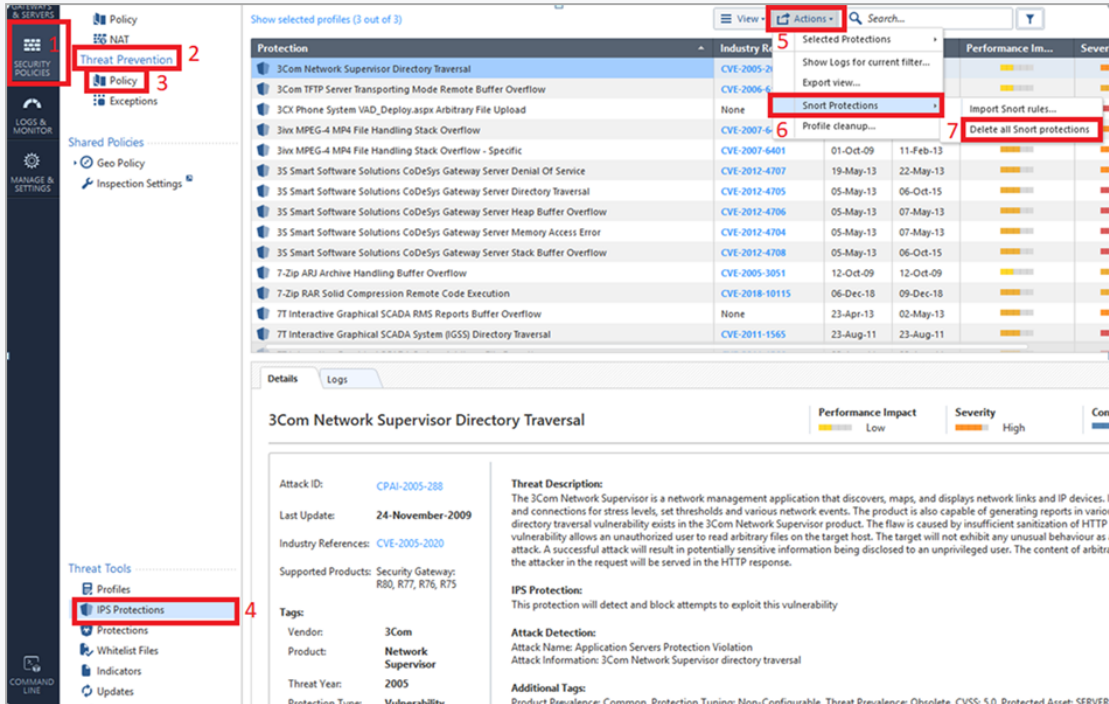
Step	Instructions
8	From the top toolbar, click Actions > Snort Protections > Delete all Snort protections. 
9	Publish the session.
10	Close the SmartConsole connected to the Global Domain.
11	From the left navigation panel, click Multi Domain > Global Assignments .
12	Reassign the Global Policy to the Local Domains.
13	Connect with SmartConsole to the applicable Multi-Domain Server that manages the applicable Security Gateway or Security Cluster.
14	Install the Threat Prevention Policy on the applicable Security Gateway or Security Cluster.


Action on SNORT Protection Rules

The Security Gateway enforces SNORT protection rules based on the profile which is installed on the Security Gateway. For example, if the profile installed on the Security Gateway is **Optimized**, by default the Security Gateway does not enforce SNORT protection rules, because their performance impact is **High** and the allowed performance impact defined in the **Optimized** profile is **Medium** or lower.

To override the profile settings for a specific SNORT protection

Note - The images here follow the example described above. If you are on a different profile, or want a different action, change steps 2 or 4 accordingly.

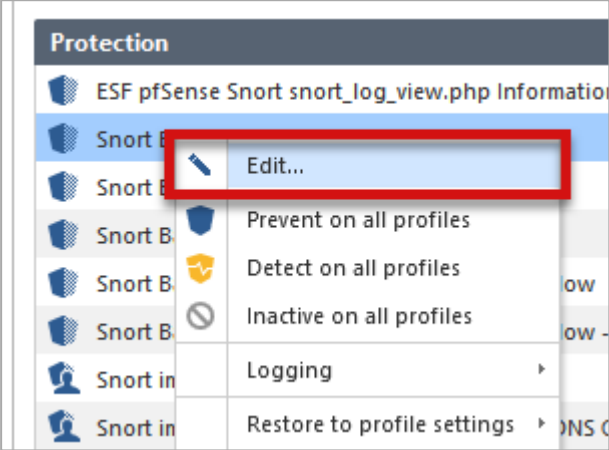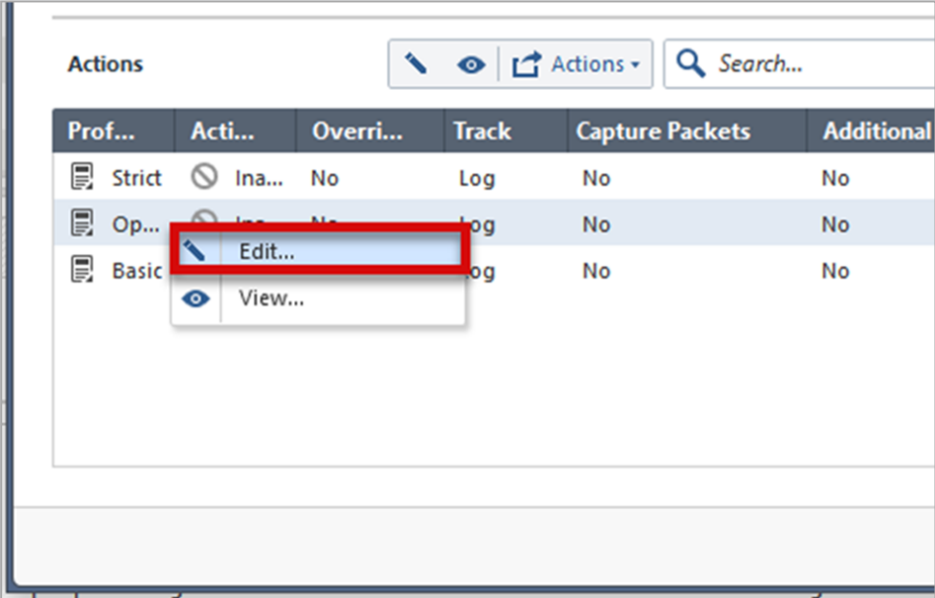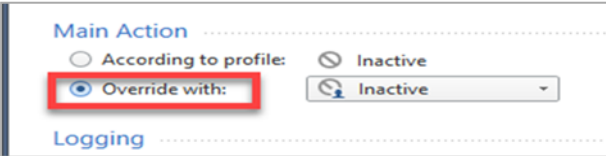Step	Instructions
1	In IPS Protections, right-click a SNORT protection and select Edit. Note - The SNORT protection names start with "Snort imported". 
2	Right-click the profile and select Edit. 
3	In the Main Action area, select Override with. 

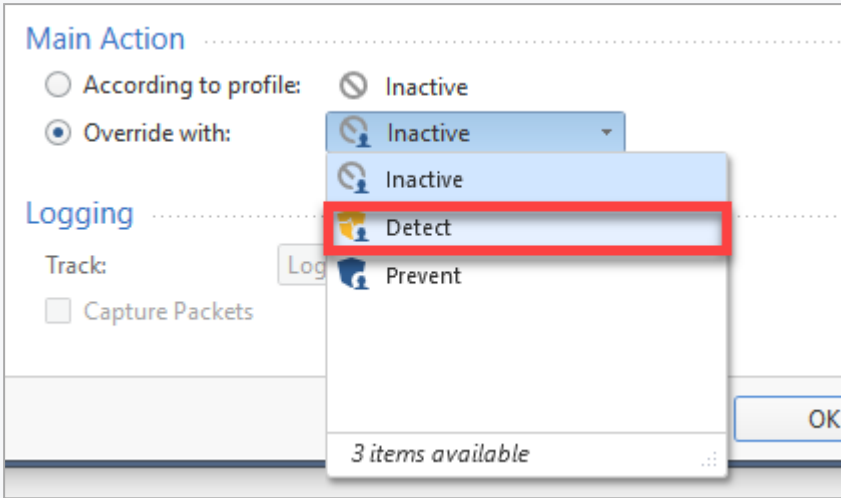Step	Instructions
4	From the drop-down menu, select the required action. 
5	Click OK .
6	Click Close .
7	Publish the SmartConsole session.
8	Install the Threat Prevention Policy.

Alternative Methods to add and delete SNORT Protection Rules

These alternative methods on the Management Server let you add and delete SNORT protection rules.

- `mgmt_cli` tool
- SmartConsole CLI
- Gaia Clish
- POST Requests

Adding SNORT Rules

The applicable command accepts two arguments:

- `package-format` which always takes the string value "snort"
- `"package-path"` which is the path to the protections' package

The command returns:

Upon success:	0
---------------	---

Upon failure:	1 along with several parameters describing the error upon failure
---------------	---

Examples

- From the `mgmt_cli` tool, run this command

```
mgmt_cli add threat-protections package-path
"/path/to/community.rules" package-format "snort" --version
1.2 --format json
```

- From the SmartConsole CLI, run this command

```
add threat-protections package-path
"/path/to/community.rules" package-format "snort" --version
1.2 --format json
```

- From the Gaia Clish, run this command

```
mgmt add threat-protections package-path
"/path/to/community.rules" package-format "snort" --version
1.2 --format json
```

Note - The *--format json* part is optional. By default, the output is presented in plain text.

- POST Request Method

A post request must:

- Be sent to the following URL: `https://<ip-address-of mgmt-server>:<port>/web_api/v1.2/add-threat-protections`
- Have the request headers **Content-Type** set to *application/json* and **X-chkp-sid** set to the unique session identifier returned by the login request.
- Have the Content-Type arguments *package-format* and *package-path* in the request body.

The server returns:

Upon success:	Status code 200
Upon failure:	The appropriate status code

Example

```
POST {{server}}/v1.2/add-threat-protections
Content-Type: application/json
X-chkp-sid: {{session}}
{
  "package-path" : "/path/to/community.rules",
  "package-format" : "snort"
}
```

Deleting SNORT Protections

The applicable command accepts one argument "package-format", which always takes the string value "snort".

The command returns:

Upon success:	0
Upon failure:	1 along with several parameters describing the error upon failure

Examples

- From the `mgmt_cli` tool, run this command

```
mgmt_cli delete threat-protections package-format "snort" --
version 1.2
```

- From the SmartConsole CLI, run this command

```
delete threat-protections package-format "snort" --version
1.2
```

- From the Gaia Clish, run this command

```
mgmt delete threat-protections package-format "snort" --
version 1.2
```

- POST Request method

A POST Request must be send to this URL:

```
https://<IP-address-of-mgmt-server>:<port>/web_
api/v1.2/delete-threat-protections
```

With the request headers **Content-Type** set to *application/json* and **X-chkp-sid** set to the unique session identifier returned by the login request. The argument *package-format* must be sent in the request body.

The server returns:

Upon success:	Status code 200
Upon failure:	The appropriate status code

Example

```
Content-Type: application/json
X-chkp-sid: {{session}}
{
  "package-format" : "snort"
}
```

Creating SNORT Rule Files

You can write your own SNORT rules and then import them to a Check Point Management Server to become IPS protections.

For more information about SNORT, see snort.org.

Check Point supports SNORT 2.9 version and lower.

SNORT rules use signatures to define attacks. A SNORT rule has a rule header and rule options.

The name of the imported SNORT protection is the value of the **msg** field in the original SNORT rule.

- If one SNORT rule has multiple msg strings with the same value, Management Server aggregates these values in one IPS SNORT protection.
- If you import a SNORT rule at different times, and it has the same **msg** string, the latest import overrides the existing IPS SNORT protection.

SNORT Rule Syntax

```
<Action> <Protocol> <Source IP Address> <Source Port> <Direction>
<Destination IP Address> <Destination Port> (msg:"<Text>";
<Keyword>:"<Option>";)
```

SNORT rules have two logical parts: Rule Header and Rule Options.

- SNORT Rule Header:

```
<Action> <Protocol> <Address> <Port> <Direction> <Address>
<Port>
```

- SNORT Rule Options:

```
<keyword>:"<option>"
```

Example:

```
alert tcp any any -> any 1:65535 (msg:"Possible exploit";
content:"|90|";)
```

Where:

- Action = alert
- Protocol = TCP
- Source IP Address = any
- Source Port = any
- Direction = ->
- Destination IP Address = any
- Destination Port (Range)= 1:65535
- Name of protection rule in IPS = Possible exploit
- Keyword = content
- Option = |90|

Supported SNORT Syntax

These are the generally supported syntax components. There are some limitations (see ["Unsupported SNORT Syntax" on page 165](#)).

Syntax components

Keyword	Description
length	Specifies the original length of the content that is specified in a protected_content rule digest
pcre	Lets you write rules with Perl-compatible regular expressions. Example: <pre>alert tcp any any -> any 80 (content:"/foo.php?id="; pcre:"/\s/foo.php?id=[0-9] {1,10}/iU";)</pre>

Keyword	Description
flowbits	Lets rules track states during a transport protocol session. Used in conjunction with conversation tracking from the Session preprocessor. Example: <pre> alert tcp \$HTTP_SERVERS any -> \$EXTERNAL_NET 21 (msg: "Does not match state in FTP path"; flow: established, to_server; content: "targetfile"; nocase; fast_pattern; flow bits: isset,INFTPPATH;no_match;) </pre>
byte_test	Tests a byte field for a specific value (with operator). Example: <pre> alert udp \$EXTERNAL_NET any -> \$HOME_NET 123 (msg: "Header length longer than maximum"; content: "length 3d "; byte_test: 4, >, 1024, 1, relative;) </pre>
byte_jump	Lets you write rules that skip over specific portions of the length-encoded protocols and perform detection in very specific locations. Example: <pre> alert udp any any -> any 123 (msg: "Check for 0001 after 0123"; content: " 30 31 32 33 "; byte_jump: 4,4, relative; content: " 30 30 30 31 "; distance: 1; relative;) </pre>
isdataat	Verifies that the payload has data at a specified location. Example: <pre> alert tcp \$EXTERNAL_NET any -> \$HTTP_SERVERS \$HTTP_PORTS (msg: "\r\n\r\nHas 300 byte after"; flow: established, to_server; content: " 0a 0d 0a 0d "; isdataat: 300,relative; sid:11111111;) </pre>
no_match	Does not block traffic even if the rule matches. Used with the "flow bits" key word to set a flag without performing a block. Example: <pre> alert tcp \$HTTP_SERVERS any -> \$EXTERNAL_NET 21 (msg: "Does not match state in FTP path"; flow: established, to_server; content: "targetfile"; nocase; fast_pattern; flow bits: isset,INFTPPATH;no_match; sid: 55555555;) </pre>

- Supported Content Keyword Modifiers: "nocase", "rawbytes", "depth", "offset:", "distance:", "within", "urilen"
- Supported Threshold Rule Types - Threshold, Both (Limit is not supported.)
- Supported Macros - HTTP_PORTS (Interpreted as 80 and 8080 ports.)

 **Note** - Make sure that SNORT Rules with the same **flowbits** flag have the same content in the **msg** field. Otherwise, they will not be under the same protection.

Debugging:

The `$FWDIR/log/SnortConvertor.elg` file on the Management Server contains is updated with the debug messages from the last SnortConvertor run import of SNORT rules.

To find failed rule debugs in this file, search for: `Failed to convert rule`

Unsupported SNORT Syntax

This syntax is not supported and will not convert

- PCRE modifiers: 'G', 'O', 'A'
- PCRE regular expression with lookahead assertion: `?!`
- Using `byte_test` keyword with operator not in: `<`, `>`, `=`, `&`, `^`
- `http_method` is not supported if it is the only http modifier type in the SNORT Rule
- Protocols: `icmp`, `ip` ("all" is interpreted as UDP and TCP protocols)
- SNORT Rule without content keyword
- All `PORT` macros, except `HTTP_PORTS`
- Specification of source port (only "any" is supported)
- Specification of destination port "any" (you must specify an exact destination port number, or a range of destination port numbers).

The conversion will change the behavior of these macros and syntax.

- Specification of IP Addresses - Enforced on **all** IP Addresses
- `HOME_NET` macro - Interpreted as "any" IP Addresses
- `EXTERNAL_NET` macro - Interpreted as "any" IP Addresses
- `HTTP_SERVERS` macro - Interpreted as "any" IP Addresses

These combinations of keywords and modifiers are implemented differently in the IPS blade as SNORT protection rules than in SNORT Rules.



Best Practice - Test them before activating them in a production environment.

Keywords and modifiers

- `rawbytes` content
- "B" PCRE modifiers with `http_uri` content
- "U" PCRE modifiers
- **With HTTP content or PCRE modifiers**
 - `http_raw_uri` content or "I" PCRE modifiers
 - `http_stat_msg` content or "Y" PCRE modifiers
 - `http_stat_code` content or "S" PCRE modifiers
- **Without HTTP content or PCRE modifiers**
 - Two or more uses of `http_header` content or "H" PCRE modifiers
 - Two or more uses of `http_raw_header` content or "D" PCRE modifiers
- **With 'depth' or 'offset' content and HTTP content that is one of these on the same content keyword, or ^ (carat) in 'pcre' with one of these HTTP 'pcre' modifiers on the same 'pcre' keyword**
 - `http_header` content or "H" PCRE modifiers
 - `http_raw_header` content or "D" PCRE modifiers
 - `http_stat_msg` content or "Y" PCRE modifiers
 - `http_stat_code` content or "S" PCRE modifiers
 - `http_uri` content or "U" PCRE modifiers
- **Use of `depth` or `offset` content, or ^ (carat) in PCRE, without any http content, and with destination ports that are not `HTTP_PORTS` macro**
- `http_client_body` content or "P" PCRE modifier
- A PCRE keyword with `{ }` (curly braces) quantifier
- Use of both content and `byte_test` keywords
- `http_header` content modifiers or "H" PCRE modifiers enforced only on raw http data (not decoded and normalized header data)
- Use of the `urilen` keyword, except in a SNORT Rule that has only `http_uri` and "U" PCRE modifiers, or `http_raw_uri` content modifier and I PCRE modifiers:

- If the SNORT Rule has only `http_uri` content or "U" PCRE modifiers, the size will be of the decoded and normalized buffer.
- If the SNORT Rule has only `http_raw_uri` content or "I" PCRE modifiers, the size will be of the raw uri buffer.

SSL Services

In addition to the conventional metadata service options, Check Point supports additional keywords specifically for SSL traffic.

SNORT rules for SSL traffic can be defined using the metadata keyword.

In the **Snort rule** options add:

```
metadata: service <ssl service>;
```

Example

```
alert tcp any any -> any 443 (msg:"Fake SSL Certificate";
content:"|08 e4 98 72 49 bc 45 07 48 a4 a7 81 33 cb f0 41 a3 51 00
33|"; metadata: service sslHello;)
```

Options for <ssl service>

Service	Description
<code>sslHello</code>	The <code>sslHello</code> service will search the Client Hello or Sever Hello depending on the flow.
<code>sslCertificate</code>	The <code>sslCertificate</code> service will search the Client Certificate or Sever Certificate depending on the flow.
<code>sslKeyx</code>	The <code>sslKeyx</code> service will search the Client Key Exchange or Sever Key Exchange depending on the flow.
<code>sslHeartbeat</code>	The <code>sslHeartbeat</code> will search the SSL heartbeats.
<code>sslCiphersuite</code>	The <code>sslCiphersuite</code> will search the Cipher Suite sent by the client.

When you use the `sslHello`, `sslCertificate`, or `sslKeyx` services, it is necessary to define a flow direction as either "`flow: to_server`" or "`flow: from_server`".



Note - These services and content modifiers are unique to Check Point and will not be supported by other SNORT engines.

Optimizing IPS - Custom Threat Prevention

IPS is a robust solution that protects your network from threats. Implementation of the recommendations in this chapter helps you maintain optimal security and performance.

During the tuning process, keep in mind that Check Point assesses performance impact and threat severity based on an industry standard mix of network traffic, with greater emphasis on common protocols such as HTTP, DNS, and SMTP. If your network carries significant volumes of other network protocols, you need to take this into account when evaluating the inspection impact on the Security Gateway and the severity of risk posed by potential attacks.

Troubleshooting IPS on a Security Gateway

When troubleshooting network traffic issues, you can temporarily stop IPS protections from blocking traffic on a Security Gateway configured in Prevent mode.

To do this:

1. In SmartConsole > **Gateways & Servers** view, right-click the required Security Gateway, and select **Edit**.
2. From the left navigation tree, select IPS.
3. In the **Activation Mode** section, click **Detect only**.

This sets all IPS protections set to **Detect only**. The Security Gateway allows traffic to pass, while tracking and logging threats according to the Track setting in the Threat Prevention policy.

Managing Performance Impact

A Check Point Security Gateway secures your network using multiple inspection functions. During periods of high network traffic load, these security functions may limit the Security Gateway's ability to quickly pass traffic. IPS includes features that balance security needs with maintaining high network performance.

Adaptive IPS

Adaptive IPS allows you to configure your Security Gateway to temporarily disable some or all of the IPS protections during periods of heavy network usage. While IPS inspection usually has minimal impact on connectivity and performance, under heavy load it can become a critical issue. When you enable Adaptive IPS, the Security Gateway may allow traffic to bypass IPS inspection, automatically resuming IPS protections after the Security Gateway's resources return to normal levels.

To enable Adaptive IPS

Step	Instructions
1	In SmartConsole, go to the Gateways & Servers view and double-click the relevant Security Gateway. The Security Gateway object editor opens in the General Properties page.
2	In the left navigation panel, click IPS .
3	Go to IPS functionality when the gateway is under heavy load , and select one of these options: ▪ Disable top CPU-consuming protections for [x] hours - Temporarily disables only the IPS protections that consume excessive CPU for the selected number of hours (minimum 1 hour and maximum 24 hours). ▪ Disable all IPS protections until CPU and Memory levels are back to normal - Temporarily disables all IPS protections during high load. After the resources return to acceptable levels, the Security Gateway automatically re-enables all IPS protections. To configure the thresholds for the Security Gateway's CPU and memory usage, click Advanced: ◦ In the High fields, enter the percentage of CPU Usage and Memory Usage that defines heavy load. At these thresholds, the Security Gateway will bypass all IPS protections. ◦ In the Low fields, enter the percentage of CPU Usage and Memory Usage that defines a return from heavy load to normal load. At these thresholds, the Security Gateway will re-enable all IPS protections. ★ Best Practice - Because all IPS protections are temporarily disabled, use this option only during the initial deployment of Threat Prevention. After you optimize the protections and performance of your Security Gateway, disable this feature to ensure full threat coverage.
4	The Track field controls how bypassed protections are logged: ▪ None - No log is generated for bypassed traffic. ▪ Log - A log entry is created indicating that the Security Gateway allowed traffic to bypass IPS inspection due to heavy load. ▪ Other options (for example: Popup Alert, Mail Alert, SNMP Trap Alert) - Additional notifications or alerts generated when the Security Gateway allows traffic to bypass IPS inspection.
5	Click OK .
6	Install the Threat Prevention Policy.

Tuning Protections

IPS Policy Settings

The IPS Policy settings allow you to control the entire body of protections by making a few basic decisions. Activating a large number of protections, including those with low severity or a low confidence level, protects against a wide range of attacks, but it can also create a volume of logs and alerts that is difficult to manage. That level of security may be necessary for highly sensitive data and resources; however it may create unintended system resource and log management challenges when applied to data and resources that do not require high security.

 **Best Practice** - Adjust the IPS Policy settings to focus the inspection effort in the most efficient manner. Once system performance and log generation reaches a comfortable level, the IPS Policy settings can be changed to include more protections and increase the level of security. Individual protections can be set to override the IPS Policy settings.

For more information on IPS Policy, see [Automatically Activating Protections](#).

 **Note** - A careful risk assessment should be performed before disabling any IPS protections.

Focus on High Severity Protections

IPS protections are categorized according to severity. You may decide that certain attacks present minimum risk to a network environment, also known as low severity attacks. Consider turning on only protections with a higher severity to focus the system resources and logging on defending against attacks that pose greater risk.

Focus on High Confidence Level Protections

Although the IPS protections are designed with advanced methods of detecting attacks, broad protection definitions are required to detect certain attacks that are more elusive. These low confidence protections may inspect and generate logs in response to traffic that are system anomalies or homegrown applications, but not an actual attack. Consider turning on only protections with higher confidence levels to focus on protections that detect attacks with certainty.

IPS Network Exceptions can also be helpful to avoid logging non-threatening traffic.

Focus on Low Performance Impact Protections

IPS is designed to provide analysis of traffic while maintaining multi-gigabit throughput. Some protections may require more system resources to inspect traffic for attacks. Consider turning on only protections with lower impact to reduce the amount system resources used by the Security Gateway.

Using the Allow List

Allow List is a list of files that are trusted. Check Point Threat Prevention engine does not inspect trusted files for malware, viruses, and bots, which helps decrease resource utilization on the gateway.

To add a file to the Allow List

Step	Instructions
1	Select Threat Prevention > Custom Policy Tools > Allow List Files . The Allow List Files page opens.
2	Click New . The New File Exception window opens.
3	Enter parameters for the new file exception: ▪ Name ▪ Comment (optional) ▪ MD5 signature ▪ Select a color (optional) - the default is black
4	Click OK .

To edit attribute of a file from the Allow List

Step	Instructions
1	Select Threat Prevention > Custom Policy Tools > Allow List Files . The Allow List Files page opens.
2	Select a file.
3	Click Edit .
4	In the file properties window that opens, make necessary changes. Click OK .

To remove a file from the Allow List

Step	Instructions
1	Select Threat Prevention > Custom Policy Tools > Allow List Files . The Allow List Files page opens.

Step	Instructions
2	Select a file or multiple files.
3	Click Delete .

Configuring Threat Prevention Settings on VSX Gateways

This section contains the instructions to enable Threat Prevention Software Blades on VSX Virtual Systems.

For more information, see [sk106496](#) and [sk79700](#).

To enable Anti-Bot, Anti-Virus, or IPS on Virtual Systems

Important:

- Make sure the routing, DNS, and proxy settings for the VSX Gateway or VSX Cluster Members (VS0) are configured correctly.
- You must enable and configure the Software Blades in these objects:
 - VSX Gateway or VSX Cluster (because VS0 handles contract validation for all Virtual Systems).
 - Applicable Virtual Systems.
- Make sure the VSX Gateway or VSX Cluster and the applicable Virtual Systems can connect to the Internet.

Virtual Systems get updates through the VSX Gateway or VSX Cluster (VS0).

If the VSX Gateway or VSX Cluster fails to connect, each Virtual System uses its proxy settings to get the updates from the Internet.

Step	Instructions
1	If applicable, configure proxy settings for the VSX Gateway or VSX Cluster (VS0) or the Virtual Systems (or both) in SmartConsole: a. From the left navigation panel, click Gateways & Servers. b. Double-click the VSX Gateway or VSX Cluster object (or the applicable Virtual System object). c. From the navigation tree, click Topology > Proxy. d. Configure the proxy settings. e. Click OK

Step	Instructions
2	Enable the Software Blade on the VSX Gateway or VSX Cluster (VS0): - Double-click the applicable VSX Gateway or VSX Cluster object. - From the navigation tree, click General Properties. - On the Threat Prevention tab, select any or all of these Software Blades: ■ Anti-Bot ■ Anti-Virus ■ IPS When you enable these Software Blades, the First Time Activation window opens. You must select: ■ According to the policy ■ Detect only - From the navigation tree, click and configure the Software Blades you enabled. - Click OK.
3	Enable the Software Blade on the applicable Virtual Systems: - Expand the VSX Gateway or VSX Cluster object and double-click the applicable Virtual System object. - From the navigation tree, click General Properties. - On the Threat Prevention tab, select any or all of these Software Blades (the same you selected in the VSX Gateway or VSX Cluster object): ■ Anti-Bot ■ Anti-Virus ■ IPS When you enable these Software Blades, the First Time Activation window opens. You must select: ■ According to the policy ■ Detect only - From the navigation tree, click and configure the Software Blades you enabled. - Click OK.
4	Configure the Threat Prevention policies for: ■ The VSX Gateway or VSX Cluster (VS0). ■ The applicable Virtual Systems.
5	Install the default VSX policy on the VSX Gateway or VSX Cluster. This policy is called: <i><Name of VSX Gateway or VSX Cluster Object>_VSX</i>

Step	Instructions
6	Install the Threat Prevention policy: ▪ On the VSX Gateway or VSX Cluster (VS0). ▪ On the applicable Virtual Systems (and Access Control Policy, if needed).

To enable Threat Emulation on Virtual Systems

Important:

- Make sure the routing, DNS, and proxy settings for the VSX Gateway or VSX Cluster Members (VS0) are configured correctly.
- Do **not** enable the Threat Emulation Software Blade in the VSX Gateway or VSX Cluster object, because it does not participate in the Threat Emulation process.

Step	Instructions
1	If applicable, configure proxy settings for the VSX Gateway or VSX Cluster (VS0), or the Virtual Systems (or both) in SmartConsole: - From the left navigation panel, click Gateways & Servers. - Double-click the VSX Gateway or VSX Cluster object (or the applicable Virtual System object). - From the navigation tree, click Topology > Proxy. - Configure the proxy settings. - Click OK
2	Enable Threat Emulation on the applicable Virtual Systems: - Expand the VSX Gateway or VSX Cluster object and double-click the applicable Virtual System object. - From the navigation tree, click General Properties. - On the Custom Threat Prevention tab, select SandBlast Threat Emulation. The Threat Emulation First Time Activation Wizard opens. - Configure the Emulation Location and click Next. - Configure the settings on the Activate Threat Extraction page and click Next. - In the Summary window, click Finish. - From the navigation tree, click and configure the Software Blades you enabled. - Click OK.

Step	Instructions
3	Configure the Threat Prevention policies for the applicable Virtual Systems.
4	Install the Threat Prevention policy on the applicable Virtual Systems (and Access Control Policy, if needed).

To enable Threat Extraction on Virtual Systems

Important:

- Make sure the routing, DNS, and proxy settings for the VSX Gateway or VSX Cluster Members (VS0) are configured correctly.
- Enable the Threat Extraction Software Blade in the VSX Gateway or VSX Cluster object.

Step	Instructions
1	If applicable, configure proxy settings for the VSX Gateway or VSX Cluster (VS0) or the Virtual Systems (or both) in SmartConsole: 1. From the left navigation panel, click Gateways & Servers. 2. Double-click the VSX Gateway or VSX Cluster object (or the applicable Virtual System object). 3. From the navigation tree, click Topology > Proxy. 4. Configure the proxy settings. 5. Click OK
2	Enable Threat Extraction on the applicable Virtual Systems: 1. Expand the VSX Gateway or VSX Cluster object and double-click the applicable Virtual System object. 2. From the navigation tree, click General Properties. 3. On the Threat Prevention tab, select SandBlast Threat Extraction. 4. Click OK.
3	Optional: When you enable Threat Extraction, support for web traffic over the HTTP and HTTPS protocol is enabled automatically. For Threat Extraction to scan e-mail attachments as well, configure the Security Gateway as a Mail Transfer Agent (MTA) (see "Configuring the Security Gateway as a Mail Transfer Agent" on page 178).
4	Configure the Threat Prevention policies for: ■ The VSX Gateway or VSX Cluster (VS0). ■ The applicable Virtual Systems.

Step	Instructions
5	Install the default VSX policy on the VSX Gateway or VSX Cluster. This policy is called: <i><Name of VSX Gateway or VSX Cluster Object>_VSX</i>
6	Install the Threat Prevention policy: ▪ On the VSX Gateway or VSX Cluster (VS0). ▪ On the applicable Virtual Systems (and Access Control Policy, if needed).

Configuring the Security Gateway as a Mail Transfer Agent

 **Important** - The 3900 appliances do not support Mail Transfer Agent (Known Limitation PMTR-115040).

You can configure the Security Gateway / Cluster as a Mail Transfer Agent (MTA) to manage SMTP traffic.

When a Security Gateway scans SMTP traffic, sometimes the email client is not able to keep the connection open for the time that is necessary to handle the email. In such cases, there is a timeout for the email.

MTA prevents this problem. The MTA first accepts the email from the previous hop, does the necessary actions on the email, and then relays the email to the next hop.

The MTA scans SMTP/TLS encrypted traffic for the supported Software Blades.

Notes:

- MTA is not supported in Autonomous Threat Prevention. To use MTA, enable **Custom Threat Prevention** in the Security Gateway / Cluster object.
- MTA is supported on VSX Gateways / VSX Clusters. The MTA configuration is the same for non-VSX Gateways / non-VSX Clusters.
- You can configure MTA to only scan the emails and not forward them to the mail server (see ["Deploying MTA in Backward Compatibility Mode" on page 184](#)).

Enabling Mail Transfer Agent

Procedure

Step	Instructions
1	Connect with SmartConsole to the Management Server. From the left navigation panel, click Gateways & Servers .
2	Create one of these required objects, if such object does not exist yet (later, you select this object in the applicable MTA rule as the Next Hop): ▪ A Host object that represents the mail server. ▪ A Domain object that represents the recipient domain. This lets you use multiple mail servers based on a DNS name. This DNS configuration allows load balancing and high-availability capabilities based on DNS configuration. This configuration requires Security Gateways R80.20 and higher. You can select only one object in each MTA rule.

Step	Instructions
3	Open the Security Gateway object.
4	From the navigation tree, click the General Properties page.
5	Enable the required Software Blades. Mail Transfer Agent supports these Software Blades: ▪ Threat Extraction (appears on the Threat Prevention (Custom) tab). ▪ Threat Emulation (appears on the Threat Prevention (Custom) tab). ▪ Anti-Spam and Mail Security (appears on the Network Security tab).
6	From the navigation tree, click the Mail Transfer Agent page.
7	Select Enable as a Mail Transfer Agent (MTA) .
8	In the Mail Forwarding section, add one or more rules. These rules configure the email traffic that the Security Gateway sends to the mail servers after it completed the scanning. The Management Server automatically adds these MTA rules at the top of the Threat Prevention - Custom Policy. In these rules: ▪ The Name column contains "MTA traffic to Gateway <Name of Object>". ▪ The Comment column contains "Automatic rule for MTA traffic". Steps: - From the toolbar, click the applicable button to add a rule (above or below). - Right-click the Domain cell and select Edit. - Enter the domain FQDN for the SMTP traffic for this rule. You can enter the wildcard * to accept all recipient domains. - Click OK. - Click the Next Hop cell and select the required Host / Domain object. Optional: Right-click the Comment cell and select Edit > enter the description for this rule and click OK.
9	Optional: Select Add signature to scanned emails and enter the message to add to the end of the email body after the Security Gateway scans it successfully.

Step	Instructions
10	The SMTP/TLS section applies if the email server uses TLS inspection: - In Step 1, click Import. The Import Outbound Certificate window opens. - Click Browse and select the required certificate file. - In the Private key password field, enter the password you configured for this certificate. - Click OK. - In Step 2, select Enable SMTP/TLS.
11	In the Implied Rule section, configure the implied rule. By default, when you configure a Security Gateway as MTA, the Management Server automatically adds an implied rule at the top of the Access Control Policy. This implied rule accepts traffic on the TCP port 25 that the network sends to the Security Gateway. The default source in this implied rule is any IP address. You can configure the source in this implied rule to allow traffic only from specific IP addresses. To disable this implied rule, clear Create an implied rule at the top of the Access Control Policy.

Step	Instructions
12	Optional: In the Advanced Settings section, click Configure Settings. - In the Interfaces section, configure the interfaces on which the Security Gateway accepts the SMTP traffic: ▪ All interfaces - SMTP traffic from all the interfaces is sent for scanning. ▪ All external - SMTP traffic from the external interfaces is sent for scanning. ▪ Use specific - SMTP traffic from the list of specified interfaces is sent for scanning. To add an interface to the list, click the plus sign (+). To remove a selected interface from the list, click the minus sign (-). - In the Mail Settings section, configure the applicable email settings: ▪ Maximum delayed time - The maximum number of minutes that the MTA keeps emails. ▪ Maximum disk usage - Amount of free disk space that the MTA can use of storage (in percent or total number of megabytes). ▪ If limits are exceeded or in case of an error - Configure: What to do when the specified Mail Settings are exceeded: • Allow - The Security Gateway allows the SMTP traffic • Block - The Security Gateway blocks the SMTP traffic • None - The Security Gateway does not generate logs How to track it: • None - The Security Gateway does not generate logs • Log - The Security Gateway generates logs • Alert - The Security Gateway generates logs and sends the configured alert (see Menu > Global properties >) - In the Troubleshooting section, configure these settings: ▪ When mail is delayed for more than - Configure the maximum number of minutes that email is delayed in the MTA before the Security Gateway applies the configured track action. ▪ Track - configure on of these: • None - The Security Gateway does not generate logs • Log - The Security Gateway generates logs • Alert - The Security Gateway generates logs and sends the configured alert (see Menu > Global properties >) - Click OK to close the MTA Advanced Settings window.
13	Click OK to close the Security Gateway properties window.
14	Install the Access Control policy on the Security Gateway.

Step	Instructions
15	Install the Threat Prevention policy on the Security Gateway.
16	Change the network settings to send SMTP traffic from external networks to the Security Gateway. Each organization has an MX record that points to the internal mail server, or a different MTA. The MX record defines the next hop for SMTP traffic that is sent to the organization. These procedures explain how to change the network settings to send SMTP to the Check Point MTA.  Important - If it is necessary to disable the MTA on the Security Gateway, change the SMTP settings or MX records first. Failure to do so can result in lost emails (see "Disabling Mail Transfer Agent" on the next page). To configure an MTA for emails that are sent to the internal mail server: - Change the applicable DNS settings on the network servers. - Change the MX records, and configure the Security Gateway as the next hop. To configure an MTA for emails that are sent to a different MTA: - Connect to the MTA that sends email to the internal mail server. - Change the SMTP settings and configure the Security Gateway as the next hop.

Disabling Mail Transfer Agent

 **Note** - If the MTA queue is not empty, or if you disable the MTA first, it is possible to lose emails that are sent to the network.

1. Change the network settings to **stop** sending SMTP traffic from external networks to the Security Gateway.

Procedure

Step	Instructions
1	Change the MX records for the network, and configure the mail server as the next hop (instead of the Security Gateway).
2	Wait for 24 hours because your servers can save the MTA address in their cache.

2. Disable the MTA in the Security Gateway object.

Procedure

Step	Instructions
1	Connect with SmartConsole to the Management Server. From the left navigation panel, click Gateways & Servers .
2	Open the Security Gateway object.
3	From the navigation tree, click the Mail Transfer Agent page.
4	Clear Enable as a Mail Transfer Agent (MTA) .
5	Click OK .
6	Install the Threat Prevention policy.

Deploying MTA in Backward Compatibility Mode

You can use the Check Point MTA to only monitor SMTP traffic - only scan the emails, but not to forward them to the mail server.



Note - Make sure that the mail relay on the network can send a copy of the emails to the Check Point MTA.

Procedure

Step	Instructions
1	Connect with SmartConsole to the Management Server. From the left navigation panel, click Gateways & Servers .
2	Create a new Host object with these settings: ▪ Name - Enter some name. For example: No_Forward_MTA ▪ IPv4 Address - Enter 0.0.0.0
3	Open the Security Gateway object.
4	From the navigation tree, click the Mail Transfer Agent page.
5	Select Enable as a Mail Transfer Agent (MTA) .
6	In the Mail Forwarding section, delete all current rules.
7	From the toolbar, click the applicable button to add a rule (above or below).
8	Right-click the Domain cell and select Edit . Enter the wildcard * to accept all recipient domains. Click OK .
9	Click the Next Hop cell and select the Host object you created earlier.
10	Optional: Right-click the Comment cell and select Edit > enter the description for this rule and click OK .
11	Click OK .
12	Install the Threat Prevention policy.

MTA Engine Updates

The Mail Transfer Agent Engine Update is an accumulation of new features and bug fixes to the MTA engine.

MTA updates are available for Security Gateways R80.20 and higher, and R80.10 with the [R80.10 Jumbo Hotfix Accumulator](#) Take 142 (and higher).

It is delivered in the form of a CPUSE package and can be installed and upgraded manually through the CPUSE. The `cpstop/cpstart` or reboot are not required.

The updates do not conflict with the regular Jumbo Hotfix Accumulators and can be installed independently.

For more information about the MTA engine updates, see [sk123174](#).

To check the current version of Mail Transfer Agent Update, run this command in the Expert mode on the Security Gateway:

```
cat $FWDIR/conf/mta_ver
```

Monitoring MTA

There are three views for MTA monitoring in SmartView available for Security Gateways R80.20 and higher, and R80.10 with [R80.10 Jumbo Hotfix Accumulator](#) Take 142 (and higher).

Procedure

Step	Instructions
1	Connect with SmartConsole to the Management Server.
2	Make sure the required Software Blades are enabled on the Management Server / Log Server object, to which the Security Gateways send their logs: - From the left navigation panel, click Gateways & Servers. - Open the Management Server / Log Server object. - From the navigation tree, click the General Properties page. - On the Management tab, select: - Logging & Status - SmartEvent Server - SmartEvent Correlation Unit - Click OK. - Click Menu > click Install database > select the servers > click Install.
3	Make sure the MTA Live Monitoring is enabled in the applicable Threat Prevention profiles: - From the left navigation panel, click Security Policies. - In the top middle panel, click Threat Prevention. - In the bottom middle section Custom Policy Tools, click Profiles. - Double-click the applicable profile. - From the navigation tree, click the Mail section > General page. - In the General section, select Enable MTA Live Monitoring. - Click OK.
4	If the option Enable MTA Live Monitoring was cleared and you selected it in a profile, then install the Threat Prevention Policy.

Step	Instructions
5	From this point, you can monitor MTA in SmartConsole or SmartView: - From the left navigation panel, click Logs & Events > Logs. - At the top, click [+] to open a new tab. - In the top section, click Views. - In the top search field, enter: MTA - Double-click the applicable MTA Monitoring view (see the details below): ▪ MTA Live Monitoring ▪ MTA Overview ▪ MTA Troubleshooting The views are based on logs that are updated with each email status change. You can customize the views, create new widgets, and export the views to Excel/PDF. For more information, see the R82.10 Logging and Monitoring Administration Guide.

View "MTA Live Monitoring"

This view shows the current status of the email traffic which passed through the MTA in these timelines:

- **Emails in Queue Timeline**
- **Current Emails in Queue**

These timelines shows the distribution of the emails in queue in a graph and a table.

If you right-click the **Action** column in the table, you can do these actions on the email:

- **Retry** - Try to handle the email again.
- **Drop** - Delete the email.
- **Bypass** - Do not perform the security inspection and send the email to the next hop.

Additional widgets:

- **Current Emails in Queue**
 - **Emails In Queue**
 - **For More Than 1 Minute**
 - **For More Than 3 Minutes**
 - **Earliest Email in Queue Arrived**
- **Emails Delivered**
 - **Emails Delivered**
- **Email Status**
 - **Bounced** - The MTA sent the Emails back to the sender.
 - **Deferred** - A temporary failure occurred. The MTA will retry to perform the applicable action again.
 - **Dropped** - The MTA did not transfer the emails to the next hop.
 - **Skipped** - The MTA bypassed the emails. No performance was performed.

When you click a column in the diagram, a window opens with a list of the logs that the column is based on.

View "MTA Overview"

This view shows statistical data on the email traffic which passed through the MTA in these timelines:

- **Emails by Status Timeline**
- **Email Content Timeline**
- **Emails in Queue Timeline**

You can use compare these timelines to identify trends in email traffic and analyze the root cause for all kinds of situations.

For example, if the emails in queue timeline shows many emails in the queue at a certain point in time, you can look at the other timelines to check the possible reasons for this.

If the content timeline shows many emails with links and attachments at the same point in time, this could explain it, because they take longer to scan.

Additional widgets:

- **Emails Additional Information**
 - **Emails Delivered**
 - **Unique Email Senders**
 - **Unique Email Recipients**
- **Emails Content**
 - **Emails With Links**
 - **Emails With Attachments**

View "MTA Troubleshooting"

This view shows the causes of failure and the number of failures for each cause:

- **Failures Timeline**
- **Most Common Failures**

This timeline shows the X top failures. The default is 5.

- **Email Failures**

This timeline shows all failures.

ICAP

Note - If you are in autonomous Threat Prevention - the option to enable ICAP does not appear. To be able to use ICAP, you must switch to Custom Threat Prevention

The **Internet Content Adaptation Protocol (ICAP)** is a lightweight HTTP-like protocol (request and response protocol), which is used to extend transparent proxy servers. This frees up resources and standardizes the way in which new features are implemented. ICAP is usually used to implement virus scanning and content filters in transparent HTTP proxy caches.

The ICAP allows ICAP Clients to pass HTTP / HTTPS messages to ICAP Servers for content adaptation. The ICAP Server executes its transformation service on these HTTP / HTTPS messages and sends responses to the ICAP Client, usually with modified HTTP / HTTPS messages. The adapted HTTP / HTTPS messages can be HTTP / HTTPS requests, or HTTP / HTTPS responses.

ICAP is a request and response protocol that is equivalent in semantics and usage to HTTP/1.1 protocol. Despite the similarity, ICAP is neither HTTP / HTTPS , nor an application protocol that runs over HTTP / HTTPS.

ICAP is an RFC protocol, which lets devices from different vendors communicate. ICAP is specified in [RFC 3507](#) (for more information, see ([ICAP Specification](#))). In addition, see the [Draft RFC - ICAP Extensions](#).

ICAP packet structure

The ICAP message is encapsulated into the TCP.



ICAP methods

Method	Description
REQMOD	Client Request Modification. The ICAP Client uses this method for an HTTP / HTTPS request modification.
RESPMOD	Server Response Modification. The ICAP Client uses this method for an HTTP / HTTPS response modification.
OPTIONS	The ICAP Client uses this method to retrieve configuration information from the ICAP Server.

ICAP response codes

These are the ICAP response codes that are different from their HTTP counterparts:

Category	Code	Description
1yz Informational codes	100	Continue after ICAP preview.
2yz Success codes	204	No Content. No modification is required.
	206	Partial Content.
4yz Client error codes	400	Bad request.
	404	ICAP Service not found.
	405	Method not allowed for service (for example, RESPMOD requested for service that supports only REQMOD).
	408	Request timeout. ICAP Server timed out waiting for a request from an ICAP Client.
	418	Bad composition. ICAP Server needs encapsulated sections different from those in the request.
5yz Server error codes	500	Server error. Error on the ICAP Server, such as "out of disk space".
	501	Method not implemented. This response is illegal for an OPTIONS request as implementation of OPTIONS is mandatory.
	502	Bad Gateway. This is an ICAP proxy error.
	503	Service overloaded. The ICAP server exceeded a maximum connection limit associated with this service. The ICAP Client should not exceed this limit in the future.
	505	ICAP version is not supported by server.

You can configure Check Point Security Gateway as:

- ICAP Client - To send the HTTP / HTTPS messages to ICAP Servers for content adaptation.

See ["Security Gateway as ICAP Client" on page 193](#).

- ICAP Server - To perform content adaptation in the HTTP / HTTPS messages received from ICAP Clients.

See [*"The Security Gateway as an ICAP Server" on page 242.*](#)

- Both ICAP Client and ICAP Server at the same time.

Check Point Security Gateway configured for ICAP can work with third party ICAP devices without changing the network topology.

Security Gateway as ICAP Client

In This Section:

Use Cases

- A content provider provides a popular web page with a different advertisement each time the page is viewed.
- Translation of web pages to different formats that are applicable for special physical devices (PDA-based or cell-phone-based browsers).
- Firewalls send outgoing HTTP / HTTPS requests to a service that makes sure the URI in the HTTP / HTTPS request is allowed. In this case, it is an HTTP / HTTPS request that is being adapted, not an object returned by an HTTP / HTTPS response.
- Users download an executable program through a caching proxy. This proxy acts as an ICAP client and asks an external server to check the executable for viruses before accepting it into its cache.


Limitations

- ICAP Client does not support ClusterXL Load Sharing mode.
- ICAP Client does not work when strict hold is active (Anti-Virus in deep scan mode, Threat Extraction on HTTP, Threat Emulation in Hold mode).

ICAP Decisions

ICAP Decision	Description and Example
Block	■ ICAP Server sends an error to the ICAP Client. ■ ICAP Server sends a block page to the ICAP Client. For example, you can present a Check Point UserCheck page from the Threat Emulation, Anti-Virus, or URL Filtering Software Blades.
Data Modification	Modification of the HTTP content. For example, your Data Loss Prevention engine can replace the DOCX file attached to an email with a PDF file.
Continue / Not modified	Default Gateway or Proxy server can forward the HTTP Request / Response to its original destination.


Example Data Flow in the Request Modification (REQMOD) Mode

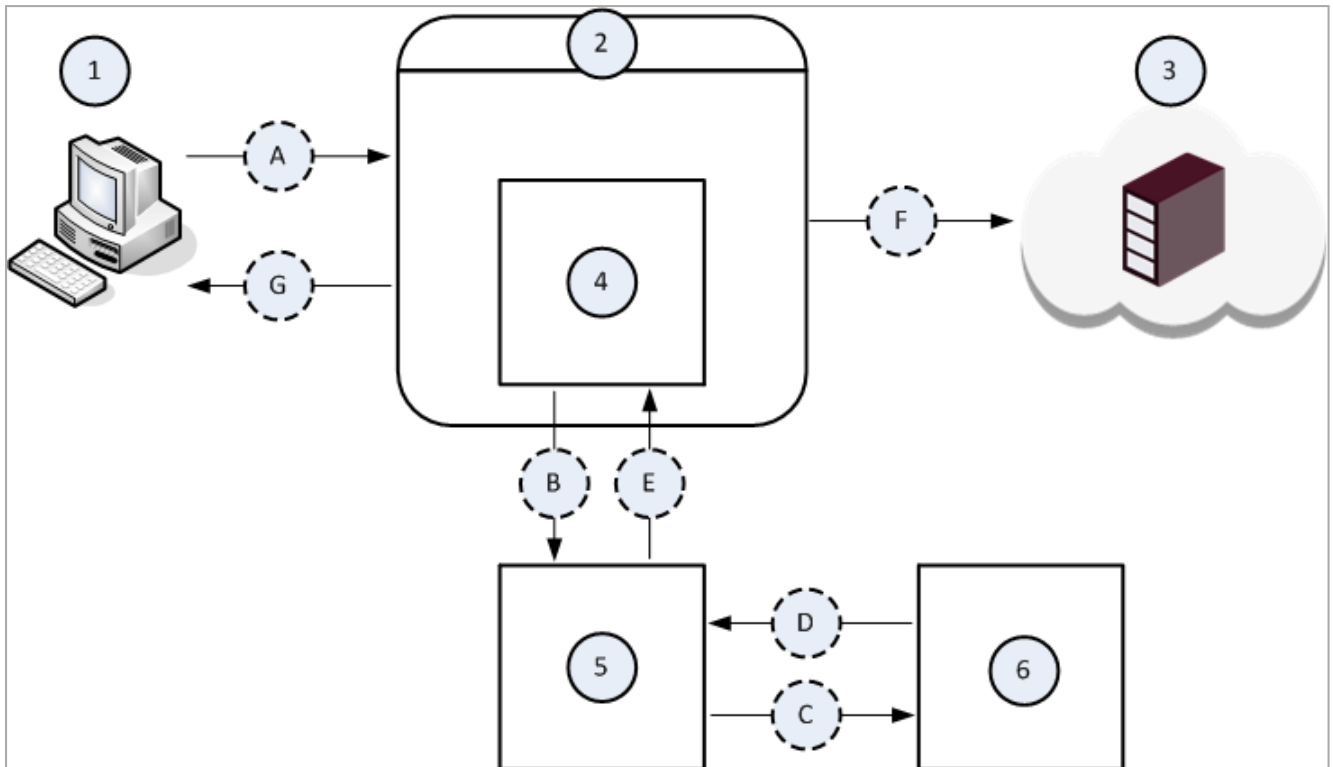

Item	Description
1	The Client computer.
2	The Proxy server.
3	The Server computer on the Internet.
4	The ICAP Client component that runs on the Proxy server (2).
5	The ICAP Server component that runs on some computer on the network.
6	The Data Loss Prevention component that runs on some computer on the network.
A	The Client computer (1) initiates a file upload to the Server computer (3).
B	The ICAP Client component (4) intercepts the uploaded file and sends it to the ICAP Server component (5).
C	The ICAP Server component (5) forwards the uploaded file to the Data Loss Prevention component (6) for examination, whether the DLP policy allows this file to leave your network.

Item	Description
D	The Data Loss Prevention component (6) returns its verdict about the uploaded file.
E	The ICAP Server component (5) returns one of these to the ICAP Client component (4): ▪ A block message. ▪ The modified file.
F	The ICAP Client component (4) forwards the modified file from the ICAP Server component (5) to the Server computer (3).
G	The ICAP Client component (4) forwards the block message from the ICAP Server component (5) to the Client computer (1).

Example Data Flow in Server Response Modification (RESPMOD) Mode

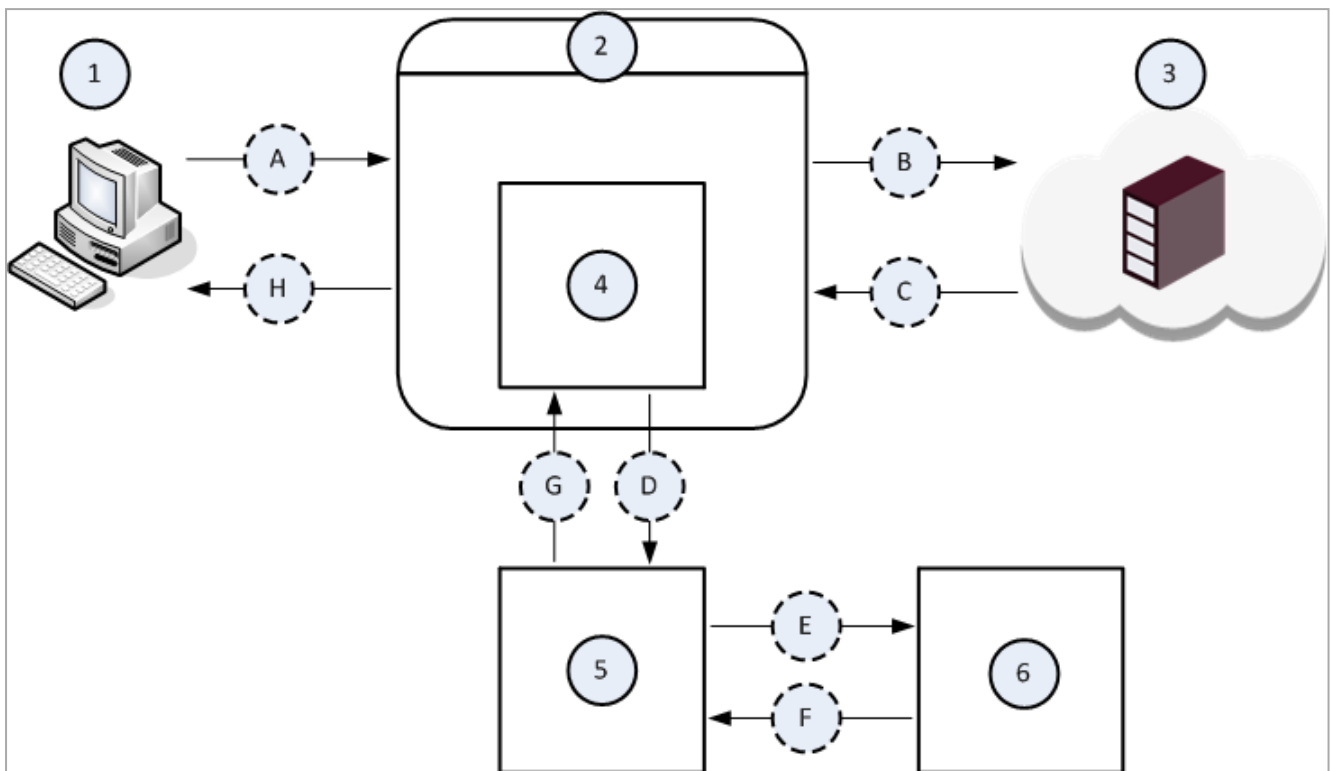

Item	Description
1	The Client computer.
2	The Proxy server.
3	The Server computer on the Internet.
4	The ICAP Client component that runs on the Proxy server (2).
5	The ICAP Server component that runs on some computer on the network.
6	The Threat Emulation component that runs on some computer on the network.
A	The Client computer (1) initiates a file download from the Server computer (3).
B	The Proxy server (2) forwards the file download request to the Server computer (3).
C	The Server (3) sends the requested file.
D	The ICAP Client component (4) intercepts the downloaded file and sends it to the ICAP Server component (5).

Item	Description
E	The ICAP Server component (5) forwards the downloaded file to the Threat Emulation component (6) for examination, whether this file is malicious.
F	The Threat Emulation component (6) returns its verdict about the downloaded file.
G	The ICAP Server component (5) returns one of these to the ICAP Client component (4): ▪ A block message. ▪ The modified file.
H	The ICAP Client component (4) forwards one of these responses from the ICAP Server component (5) to the Client computer (1): ▪ A block message. ▪ The modified file.

Limitations

ICAP Client does not support ClusterXL Load Sharing mode.

ICAP Client Functionality

The ICAP Client functionality in your Check Point Security Gateway or Cluster enables it to interact with an ICAP Server responses, modify their content, and block the matched HTTP connections.

In addition, you can add an ICAP Server decision to the enforcing logic on your Security Gateway, or Cluster (see ["Configuring Additional ICAP Response Headers for Enforcement" on page 223](#)).

The ICAP Client functionality in your Check Point Security Gateway or Cluster lets you work with 3rd party devices without changing your network topology.

The ICAP Client feature in your Check Point Security Gateway or Cluster supports these:

- HTTP request modification (ICAP REQMOD).
- HTTP response modification (ICAP RESPMOD).
- HTTPS traffic, which you can send to an ICAP Server.



Important:

- You must enable and configure the HTTPS Inspection on your Security Gateway or Cluster.
- The ICAP Client communication with the configured ICAP Servers is in clear (unencrypted) traffic.

- Multiple ICAP Servers:

ICAP Client can send the HTTP messages to several ICAP Servers concurrently.

- User-defined ICAP *request* header extensions (X-Headers):
 - *X-Client-IP*, *X-Server-IP* (for the destination host), and *X-Authenticated-User* (if the ICAP Client knows it).
 - To work with user-defined ICAP *response* header extension, you must configure them explicitly (see ["Configuring Additional ICAP Response Headers for Enforcement" on page 223](#)).
 - See the [Draft RFC - ICAP Extensions](#).
- Data Trickling mode.
- UserCheck.

This ICAP Client functionality was tested against an internal ICAP Server and against the Check Point ICAP Server.

**Notes:**

- There is no full Fail-Open support. In case of HTTP / HTTPS requests or responses with body and with only a single ICAP Server Service, the Fail Mode is always Fail-Close.
ICAP Client in Check Point Security Gateway can support the Fail-Open with the *Trickling From The End* mode (see "[Configuring ICAP Client Data Trickling Parameters](#)" on page 238).
- To inspect IPv6 traffic:
 1. Enable IPv6 support on your Security Gateway or Cluster members
 2. Configure all ICAP Servers with IPv6 addresses.

ICAP Client User Disclaimer

You acknowledge you are authorized to receive and install the ICAP Client feature and functionality that can decrypt HTTPS traffic and forward it to 3rd party automated devices for storage and/or compliance.

By installing this feature, you understand that transferring such decrypted data may be in breach of privacy laws in certain countries, and that it is your responsibility to determine whether it is legal to use this functionality in your jurisdiction.

By enabling this functionality, you declare that you have the legal right to decrypt and forward HTTPS traffic, using the ICAP protocol, in all relevant jurisdictions and that you have obtained all necessary consents from your users to do so.

You agree to indemnify and hold harmless Check Point from any and all claims and/or demands related to the violation of any data protection laws and regulation, or to the inappropriate use or implementation of this feature.

Getting Started with ICAP Client



Important - In a Cluster, you must configure all the Cluster Members in the same way.

Procedure:

1. Configure ICAP Client in Gateway mode

- a. Connect to the command line on the Security Gateway.
- b. Log in to the Expert mode.
- c. Follow the instructions in the ICAP user-disclaimer:

```
[Expert@GW:0]# IcapDisclaimer.sh
```

If you agreed to the ICAP user-disclaimer, continue to the next step.

- d. Backup the default ICAP Client configuration file:

```
cp -v $FWDIR/conf/icap_client_blade_configuration.C{, _  
BKP}
```

- e. Configure the ICAP Client parameters:

```
vi $FWDIR/conf/icap_client_blade_configuration.C
```

For details, see these sections:

- ["The ICAP Client Configuration File" on page 205](#)
- ["Example of the ICAP Client Configuration File" on page 218](#)

- f. Save the changes in the file and exit the editor.
- g. To inspect the HTTPS traffic with the ICAP Client, you must:
 - i. Enable the HTTPS Inspection in the Security Gateway object.
 - ii. Configure the HTTPS Inspection Rule Base.

For details, see ["HTTPS Inspection" on page 363](#).

h. Install the Access Control Policy on the Security Gateway:

- If you enabled and configured the HTTPS Inspection, install the policy from the SmartConsole.
- If you did not enable and configure the HTTPS Inspection, you can do one of these:
 - Install the policy from the SmartConsole.
 - Fetch the local policy with the this command on the Security Gateway:

```
fw fetch localhost
```

 **Note** - If one of the ICAP configuration parameters is not configured correctly, SmartConsole shows an error with the name of the applicable parameter.

2. Make sure you have an ICAP Server on the network, and that it can receive requests from the ICAP Client. To configure a Check Point Security Gateway as an ICAP Server, see ["Getting Started with ICAP Server" on page 245](#).

Configuring ICAP Client in VSX mode

You configure the ICAP Client functionality in the context of *each* applicable Virtual System.



Important - In a Cluster, you must configure all the Cluster Members in the same way.

Procedure:

1. Connect to the command line on the VSX Gateway.
2. Log in to the Expert mode.
3. Go to the context of the applicable Virtual System:

```
vsenv <VSID>
```

4. Follow the instructions in the ICAP user-disclaimer:

```
IcapDisclaimer.sh
```

If you agreed to the ICAP user-disclaimer, continue to the next step.

5. Backup the default ICAP Client configuration file:

```
cp -v $FWDIR/conf/icap_client_blade_configuration.C{,_BKP}
```

6. Configure the ICAP Client parameters:

```
vi $FWDIR/conf/icap_client_blade_configuration.C
```

For details, see these sections:

- ["The ICAP Client Configuration File" on page 205](#)
- ["Example of the ICAP Client Configuration File" on page 218](#)

7. Save the changes in the file and exit the editor.
8. To inspect the HTTPS traffic with the ICAP Client, you must:
 - a. Enable the HTTPS Inspection in the Virtual System object.
 - b. Configure the HTTPS Inspection Rule Base.

For details, see ["HTTPS Inspection" on page 363](#).

9. Install the Access Control Policy on the Virtual System:

- If you enabled and configured the HTTPS Inspection, install the policy from the SmartConsole
- If you did not enable and configure the HTTPS Inspection, you can do one of these:
 - Install the policy from the SmartConsole.
 - Fetch the local policy with the this command in the context of this Virtual System:

```
fw fetch localhost
```

 **Note** - If one of the ICAP configuration parameters is not configured correctly, SmartConsole shows an error with the name of the applicable parameter.

The ICAP Client Configuration File

The ICAP Client configuration file on Check Point Security Gateway (`$FWDIR/conf/icap_client_blade_configuration.C`) contains a number of sections.

Each section contains the applicable parameters.

Some parameters accept only string values (notice the mandatory double quotes).

Some parameters accept only integer values.

Parameter	Accepted Values	Description
<code>:enabled ()</code>	■ "false" ■ "true"	Controls the ICAP Client feature: ■ "false" - Disables the feature ■ "true" - Enables the feature Default: "false"
<code>:filter_http_method ()</code>	■ :method ("GET") ■ :method ("PUT") ■ :method ("POST") ■ :method ("CONNECT") ■ :method ("HEAD") ■ :method ("OPTIONS")	Controls which HTTP methods to process. If this section is empty, there is no filter for HTTP requests. As a result, ICAP functionality is not activated on <i>all</i> HTTP requests. Default: "GET", "PUT", and "POST"

Parameter	Accepted Values	Description
<code>:http_services ()</code>	<code>:port (NUMBER)</code> Integer from 1 to 65535	Controls on which port to process the HTTP packets. This is in addition to the HTTP services that are defined by default in SmartConsole (such as: HTTP for TCP port 80 and HTTPS for TCP port 443). You must explicitly add every port, on which you transfer HTTP packets. Ranges of ports are not supported. ICAP filtering (HTTP methods) works on every port you define in this section. If traffic matches a filter, full ICAP functionality is activated on that port. Default: 8080 ★ Best Practice - Add only applicable ports.
<code>:inspect_html_response ()</code>	■ "false" ■ "true"	Controls whether ICAP Client sends HTTP responses with content-type "text/html": ■ "false" - ICAP Client does not send an HTTP response with content-type "text/html". ■ "true" - ICAP Client also sends an HTTP response with content-type "text/html". Default: "false"

Parameter	Accepted Values	Description
<code>:user_check_interaction_name()</code>	Plain-text string (string length is up to 32 characters)	Controls the name of UserCheck block page. If you change the default value, you must configure your value in the SmartConsole: 1. Objects menu > Object Explorer > More object types > UserCheck > New Drop. 2. Select the Access Control related policy. 3. Click OK. 4. You must enter the same name as you configured in the ICAP Client configuration file. 5. Add the new message for the UserCheck Block page. 6. Click OK. 7. Install the Access Control Policy on the Security Gateway. Default: "Blocked Message - Access Control"

Parameter	Accepted Values	Description
<code>:trickling_mode</code> ()	■ 0 ■ 1 ■ 2 ■ 3	Controls the Data Trickling mode (see "Configuring ICAP Client Data Trickling Parameters" on page 238). To avoid HTTP connection timeout when you upload or download large files, you can use the Data Trickling to pass some of the original HTTP payload to its destination, while the ICAP Server scans this HTTP payload. ■ 0 - <i>No data trickling</i>. ICAP Client always holds the HTTP connections until it gets a verdict from an ICAP Server (same functionality as for processing small files). ■ 1 - <i>Read-only mode</i>. The ICAP Client sends the entire HTTP payload to its original destination without waiting for the ICAP Server's response. When the ICAP Server responds, a log is generated according to the log configuration. ■ 2 - <i>Trickling from the Start mode</i>. ICAP Client sends the entire HTTP payload to its original destination, but slower than the original HTTP connection speed. This behavior is so that the ICAP Server verdict arrives before ICAP Client sends the HTTP payload to its original destination. ■ 3 - <i>Trickling at the End mode</i>. ICAP Client sends the entire HTTP payload to its original destination, except for the last (constant size) HTTP payload. Based on the verdict from the ICAP Server, ICAP Client sends or does not send this last HTTP payload.

Parameter	Accepted Values	Description
		Default: 0
<code>:log_level ()</code>	■ 0 ■ 1 ■ 2 ■ 3	Controls the ICAP Client log level: ■ 0 - No logs. ■ 1 - Error logs (arrive with Alert). ■ 2 - Information logs (include verdict for the original HTTP connection). ■ 3 - Verbose logs (include service action for each ICAP Server connection). Default: 0
<code>:icap_servers ()</code>		Defines the ICAP Servers, with this the ICAP Client works.
<code>:icap_servers ()</code> <code>- :name ()</code>	Plain-text string (string length is up to 32 characters)	Defines the name of the ICAP Server. Used for logging.
<code>:icap_servers ()</code> <code>- :ip ()</code>	IPv4 Address in quad-decimal format (string length is up to 32 characters)	Defines the IPv4 address of the ICAP Server. This parameter is mandatory.  Note - For the ICAP Server on a Check Point cluster, must enter the Cluster Virtual IPv4 address.
<code>:icap_servers ()</code> <code>- :ip6 ()</code>	IPv6 Address (string length is up to 40 characters)	Defines the IPv6 address of the ICAP Server. This parameter is optional.  Notes: ■ The ICAP server must have an IPv6 set up. ■ For the ICAP server on a Check Point cluster, must enter the Cluster Virtual IPv6 address.
<code>:icap_servers ()</code> <code>- :port ()</code>	Integer from 1 to 65535	Defines the port on the ICAP Server. Default: 1344
<code>:icap_servers ()</code> <code>- :service ()</code>	Plain-text string up to 32 characters	Defines the name of the ICAP service. Default: "echo"

Parameter	Accepted Values	Description
<code>:icap_servers ()</code> <code>- :proto ()</code>	"icap"	Defines the ICAP protocol.  Note - You must not change this value. Default: "icap"
<code>:icap_servers ()</code> <code>- :modification_</code> <code>mode ()</code>	■ "reqmod" ■ "respmod" ■ "both"	Defines the ICAP modification mode: ■ "reqmod" - HTTP request modification (REQMOD) only. ■ "respmod" - HTTP response modification (RESPMOD) only. ■ "both" - Both HTTP request and HTTP response modification modes. Default: "both"
<code>:icap_servers ()</code> <code>- :transp ()</code>	"3rd_cpas"	Defines the 3rd party connection type.  Note - You must not change this value. Default: "3rd_cpas"
<code>:icap_servers ()</code> <code>- :failmode ()</code>	■ close ■ open	Defines the ICAP Client fail mode: ■ <code>close</code> - In case of an ICAP error, the original HTTP connection is closed. ■ <code>open</code> - In case of an ICAP error, the original HTTP connection stays opened. ■ Logs will be according to <code>:log_level ()</code> value. For HTTP requests or responses with a body, the last service fail-mode action is always treated as <code>close</code> , regardless of the defined value. Default: <code>close</code>
<code>:icap_servers ()</code> <code>- :timeout ()</code>	Integer from 1 to (2^32)-1	Defines the ICAP Client timeout (in seconds). After this time passes, the ICAP Client sends a reset to the ICAP Server. Default: 61

Parameter	Accepted Values	Description
<pre>:icap_servers () - :max_conns ()</pre>	Integer from 1 to (2 ³²)-1	Defines the maximum number of ICAP opened connections to each configured ICAP Server. Default: 250
<pre>:icap_servers () - :user_check_ action ()</pre>	■ 0 ■ 1 ■ 2	Defines the UserCheck action: ■ 0 - No "Block" page. ■ 1 - ICAP "Block" page. ■ 2 - Redirect to UserCheck Portal ("Block" page). On the Security Gateway, you must enable at least one of the supported Software Blades and the UserCheck. Default: 1
<pre>:icap_servers () - :x_headers ()</pre>		Controls the X-Headers: <i>X-Client-IP</i>, <i>X-Server-IP</i>, and <i>X-Authenticated-User</i>.
<pre>:icap_servers () - :x_headers () - :x_client_ip ()</pre>	■ "false" ■ "true"	Controls the X-Header <i>X-Client-IP</i>: ■ "false" - Does not process this X-Header. ■ "true" - Adds the XFF header value of the original HTTP request, if this X-Header exists, or the source IP address if it does not. Default: "false"
<pre>:icap_servers () - :x_headers () - :x_server_ip ()</pre>	■ "false" ■ "true"	Controls the X-Header <i>X-Server-IP</i>: ■ "false" - Does not process this X-Header. ■ "true" - Adds the destination IP address (proxy's IP address or resolving HTTP Hostname). Default: "false"

Parameter	Accepted Values	Description
<pre>:icap_servers () - :x_headers () - :x_authenticated_ user ()</pre>	■ "false" ■ "true"	Controls the X-Header <i>X-Authenticated-User</i>: ■ "false" - Does not process this X-Header. ■ "true" - Adds the username from Identity Awareness Software Blade. Default: "false"
<pre>:icap_servers () - :x_headers () - :authentication_ source ()</pre>	■ "WinNT" ■ "LDAP" ■ "Radius" ■ "Local"	Defines the Auth-Scheme for user authentication URI.  Note - URI is given as plain-text, and not in the Base64 encoding. Default: "Local"
<pre>:icap_servers () - :x_headers () - :base64_username_ encode ()</pre>	■ "false" ■ "true"	Controls whether to encode the X-Header <i>X-authenticated-user</i> with Base64 encoding ■ "false" - Does not encode. ■ "true" - Encodes with the Base64 encoding. Default: "true"
<pre>:rules_type ()</pre>	■ "none" ■ "include" ■ "exclude"	Controls the network filter rules: ■ "none" - Disables the network filter rules. ICAP Client ignores all other parameters of network filter rules. Same as "any" in the Source and Destination. ■ "include" - ICAP Client sends all IP addresses in the IP ranges (see below) to the ICAP Server ■ "exclude" - ICAP Client does not send the IP addresses in the IP ranges (see below) to the ICAP Server Default: "none"
<pre>:network_filter_ rules_ip4 ()</pre>		Controls the network filter rules for source and destination IPv4 addresses.

Parameter	Accepted Values	Description
<pre>:network_filter_ rules_ip4 () - :src_ip_ranges ()</pre>		Defines the source IPv4 addresses. Each rule can contain only one <code>:src_ip_ranges ()</code> parameter. The <code>:src_ip_ranges ()</code> parameter can contain more than one <code>:min_ip ()</code> and <code>:max_ip ()</code> parameters.
<pre>:network_filter_ rules_ip4 () - :src_ip_ranges () - :min_ip ()</pre>	■ any ■ IPv4 Address in quad-decimal format	Defines the minimum source IPv4 address in the range of IPv4 source addresses. ■ any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:min_ip (any)</code>, you must also define <code>:max_ip (any)</code>. ■ IPv4 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv4 addresses start from this configured IPv4 address.
<pre>:network_filter_ rules_ip4 () - :src_ip_ranges () - :max_ip ()</pre>	■ any ■ IPv4 Address in quad-decimal format	Defines the maximum source IPv4 address in the range of IPv4 source addresses. ■ any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:max_ip (any)</code>, you must also define <code>:min_ip (any)</code>. ■ IPv4 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv4 addresses end with this configured IPv4 address.

Parameter	Accepted Values	Description
<code>:network_filter_rules_ip4 () - :dst_ip_ranges ()</code>		Defines the destination IPv4 addresses. Each rule can contain only one <code>:dst_ip_ranges ()</code> parameter. The <code>:dst_ip_ranges ()</code> parameter can contain more than one <code>:min_ip ()</code> and <code>:max_ip ()</code> parameters.
<code>:network_filter_rules_ip4 () - :dst_ip_ranges () - :min_ip ()</code>	- any - IPv4 Address in quad-decimal format	Defines the minimum destination IPv4 address in the range of IPv4 destination addresses. - any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:min_ip (any)</code>, you must also define <code>:max_ip (any)</code>. - IPv4 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv4 addresses start from this configured IPv4 address.
<code>:network_filter_rules_ip4 () - :dst_ip_ranges () - :max_ip ()</code>	- any - IPv4 Address in quad-decimal format	Defines the maximum destination IPv4 address in the range of IPv4 destination addresses. - any - ICAP Client processes the HTTP traffic sent to all HTTP servers. If you defined <code>:max_ip (any)</code>, you must also define <code>:min_ip (any)</code>. - IPv4 Address - ICAP Client processes the HTTP traffic sent to HTTP servers, whose IPv4 addresses end with this configured IPv4 address.
<code>:network_filter_rules_ip6 ()</code>		Controls the network filter rules for source and destination IPv6 addresses.

Parameter	Accepted Values	Description
<pre>:network_filter_ rules_ip6 () - :src_ip_ranges ()</pre>		Defines the source IPv6 addresses. Each rule can contain only one <code>:src_ip_ranges ()</code> parameter. The <code>:src_ip_ranges ()</code> parameter can contain more than one <code>:min_ip ()</code> and <code>:max_ip ()</code> parameters.
<pre>:network_filter_ rules_ip6 () - :src_ip_ranges () - :min_ip ()</pre>	■ any ■ IPv6 Address	Defines the minimum source IPv6 address in the range of IPv6 source addresses. ■ any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:min_ip (any)</code>, you must also define <code>:max_ip (any)</code>. ■ IPv6 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv6 addresses start from this configured IPv6 address.
<pre>:network_filter_ rules_ip6 () - :src_ip_ranges () - :max_ip ()</pre>	■ any ■ IPv6 Address	Defines the maximum source IPv6 address in the range of IPv6 source addresses. ■ any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:max_ip (any)</code>, you must also define <code>:min_ip (any)</code>. ■ IPv6 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv6 addresses end with this configured IPv6 address.

Parameter	Accepted Values	Description
<pre>:network_filter_ rules_ip6 () - :dst_ip_ranges ()</pre>		Defines the destination IPv6 addresses. Each rule can contain only one <code>:dst_ip_ranges ()</code> parameter. The <code>:dst_ip_ranges ()</code> parameter can contain more than one <code>:min_ip ()</code> and <code>:max_ip ()</code> parameters.
<pre>:network_filter_ rules_ip6 () - :dst_ip_ranges () - :min_ip ()</pre>	■ any ■ IPv6 Address	Defines the minimum destination IPv6 address in the range of IPv6 destination addresses. ■ any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:min_ip (any)</code>, you must also define <code>:max_ip (any)</code>. ■ IPv6 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv6 addresses start from this configured IPv6 address.
<pre>:network_filter_ rules_ip6 () - :dst_ip_ranges () - :max_ip ()</pre>	■ any ■ IPv6 Address	Defines the maximum destination IPv6 address in the range of IPv6 destination addresses. ■ any - ICAP Client processes the HTTP traffic from all HTTP clients. If you defined <code>:max_ip (any)</code>, you must also define <code>:min_ip (any)</code>. ■ IPv6 Address - ICAP Client processes the HTTP traffic from HTTP clients, whose IPv6 addresses end with this configured IPv6 address.

Notes about the `:network_filter_rules_ip4 ()` and `:network_filter_rules_ip6 ()` parameters:

- Each `:network_filter_rules_ipX ()` rule can contain only one `:src_ip_ranges ()` parameter.

The `:src_ip_ranges ()` parameter in the rule can contain more than one `:min_ip ()` and `:max_ip ()` parameters.

- Each `:network_filter_rules_ipX ()` rule can contain only one `:dst_ip_ranges ()` parameter.

The `:dst_ip_ranges ()` parameter in the rule can contain more than one `:min_ip ()` and `:max_ip ()` parameters.

- ICAP Client performs these logical operations in parallel:

- `[ :network_filter_rules_ip4 () ] OR [ :network_filter_rules_ip6 () ]`
- `[ :src_ip_ranges () ] AND [ :dst_ip_ranges () ]`
- In the `:src_ip_ranges ()` parameter - `[ :min_ip () ] OR [ :max_ip () ]`
- In the `:dst_ip_ranges ()` parameter - `[ :min_ip () ] OR [ :max_ip () ]`

If the result of these logical operations is TRUE and `:rules_type ("include")`, then ICAP Client works.

If the result of these logical operations is TRUE and `:rules_type ("exclude")`, then ICAP Client does **not** work.

Example of the ICAP Client Configuration File

This is an example configuration file `$FWDIR/conf/icap_client_blade_configuration.C`:

```
(
:enabled ("true")
:filter_http_method (
  : (
    :method ("GET")
  )
  : (
    :method ("PUT")
  )
  : (
    :method ("POST")
  )
)
:http_services (
  : (
    :port (8080)
  )
  : (
    :port (8443)
  )
)
:inspect_html_response ("false")
:trickling_mode (0)
:user_check_interaction_name ("Blocked Message - Access Control")
:log_level (2)
:icap_servers (
  : (
    :name ("icap_server_1")
    :ip ("10.1.0.20")
    :ip6 ("2001:db8:6:f101::15")
    :port (1344)
    :service ("echo")
    :proto ("icap")
    :modification_mode ("both")
    :transp ("3rd_cpas")
    :failmode (open)
    :timeout (60)
    :max_conns (50)
    :user_check_action (1)
    :x_headers (
      :x_client_ip ("false")
      :x_server_ip ("false")
      :x_authenticated_user ("false")
      :authentication_source ("Local")
      :base64_username_encode ("true")
    )
  )
  : (
    :name ("icap_server_2")
    :ip ("10.1.0.30")
    :ip6 ("2001:db8:6:f101::16")
    :port (1344)
    :service ("echo")
    :proto ("icap")
    :modification_mode ("respmod")
    :transp ("3rd_cpas")
    :failmode (close)
    :timeout (120)
    :max_conns (250)
    :user_check_action (2)
    :x_headers (
      :x_client_ip ("true")
      :x_server_ip ("true")
      :x_authenticated_user ("true")
      :authentication_source ("WinNT")
    )
  )
)
:rules_type ("include")
:network_filter_rules_ip4 (
  : (
```

```

        :src_ip_ranges (
        : (
            :min_ip ("10.0.0.6")
            :max_ip ("10.0.0.10")
        )
        : (
            :min_ip ("10.0.0.100")
            :max_ip ("10.0.0.150")
        )
    )
    :dst_ip_ranges (
    : (
        :min_ip ("10.1.0.1")
        :max_ip ("10.1.255.255")
    )
    )
)
: (
    :src_ip_ranges (
    : (
        :min_ip ("10.0.0.21")
        :max_ip ("10.0.0.24")
    )
    )
    :dst_ip_ranges (
    : (
        :min_ip ("any")
        :max_ip ("any")
    )
    )
)
)
:network_filter_rules_ip6 (
: (
    :src_ip_ranges (
    : (
        :min_ip ("2001:db8:5:f101::11")
        :max_ip ("2001:db8:5:f101::15")
    )
    )
    :dst_ip_ranges (
    : (
        :min_ip ("2001:db8:6:f101::1")
        :max_ip ("2001:db8:6:f101::20")
    )
    )
)
)
)
)
)

```

Clarification about the rules in the example above:

- **[:network_filter_rules_ip4 ()] OR [:network_filter_rules_ip6 ()]**
- **In the " :network_filter_rules_ip4 () ":**
 - [:src_ip_ranges ()] AND [:dst_ip_ranges ()]**
 - **Rule**

All traffic that arrives from IPv4 (10.0.0.6 **OR** 10.0.0.7 ... **OR** 10.0.0.10)

AND destined to IPv4 (10.1.0.1 **OR** 10.1.0.2 ... **OR** 10.1.255.255)

- Rule

All traffic that arrives from IPv4 (10.0.0.100 **OR** 10.0.0.101 ... **OR** 10.0.0.150)
AND destined to IPv4 (10.1.0.1 **OR** 10.1.0.2 ... **OR** 10.1.255.255)

- Rule

All traffic that arrives from IPv4 (10.0.0.21 **OR** 10.0.0.22 ... **OR** 10.0.0.24)
AND destined to any IPv4 address

- In the ":network_filter_rules_ip6 ()":

[:src_ip_ranges ()] **AND** [:dst_ip_ranges ()]

- Rule

All traffic that arrives from IPv6 (2001:db8:5:f101::11 **OR** 2001:db8:5:f101::12 ...
OR 2001:db8:5:f101::15)

AND destined to IPv6 (2001:db8:6:f101::1 **OR** 2001:db8:6:f101::2 ... **OR**
 2001:db8:6:f101::20)

Advanced ICAP Client Configuration

You can configure advanced settings in the ICAP Client using the applicable kernel parameters.

For general instructions, see the [R82.10 Security Gateway Guide](#) > *Working with Kernel Parameters on Security Gateway*.

You can configure these advanced settings in the ICAP Client:

- Additional ICAP response headers for enforcement
- Additional HTTPS Status Codes, which ICAP Client sends in RESPMOD
- Connection timeout for ICAP connections
- ICAP Client data trickling parameters

Configuring Additional ICAP Response Headers for Enforcement

In This Section:

Description	223
Default HTTP Response X-Headers	223
Additional HTTP Response X-Headers	228
Configuring the Additional HTTP Response X-Headers	230

Description

To adjust the enforcement according to ICAP response headers from an ICAP Server, you can configure specific HTTP headers. When ICAP Client on Check Point Security Gateway receives these HTTP headers, the Security Gateway blocks the matched HTTP connections. See the [Draft RFC - ICAP Extensions](#).

Default HTTP Response X-Headers

By default, ICAP Client recognizes these three user-defined ICAP *response* header extensions.

Default X-Headers

HTTP Response X-Header	Description	Examples
X-Virus-ID	Contains a short description of the threat that was found in the content. On a single line it can contain any virus or threat description. If multiple threats were found, only the first one is returned. This header is a shorter alternative to the X-Infection-Found header. This header is available only if the content was scanned, and some violations were found.	<pre>X-Virus-ID: EICAR Test String X-Virus-ID: Encrypted Archive</pre>

HTTP Response X-Header	Description	Examples
X-Violations-Found	Contains the detailed description of all the policy violations (for example, found viruses) that occurred while handling the request. If the scanned content was an archive, the scan results are listed for the contained files as well. If multiple threats were found for a single file, only the first one is returned. This header is present only if the content was scanned, and some violations were found. This header has a multi-line value starting with the number of reported violations on the first line and four additional lines per violation: 1. The first line contains the number of the reported violations. 2. The following lines contain the details: - Filename May describe a single file within an archive that the ICAP Client sent to the ICAP Server. - ThreadDescription Human readable description of the threat. For example, the virus name or the policy violation description. It may contain spaces and should not be quoted. - ProblemID:	<pre>X-Violations-Found: 2 test.zip/dir1/eicar.com EICAR Test String 11101 2 test.zip/dir2/eicar.com EICAR Test String 11101 2</pre>

HTTP Response X-Header	Description	Examples
	One-digit integer identifier of the policy violation. For example, a virus ID. Currently, 0 is returned for all threats. ResolutionID: 0: File was not repaired. 1: File was repaired. 2: Violating part was removed (usually used if a file was removed from a container).	

HTTP Response X-Header	Description	Examples
X-Infection-Found	Contains the description of the threat that was found in the ICAP message body of the request. If multiple threats were found, only the first one is returned. This header is present only if the content was scanned, and some violations were found. The value is a semicolon-separated parameter list with exactly three parameters in a given order: TypeID: 0: Virus infection. 1: Mail policy violation (for example, illegal file attachment name). 2: Container violation (for example, a ZIP file that takes too long to decompress). ResolutionID: 0: File was not repaired. 1: The returned file in the RESPMOD response is the repaired version of the infected file that was encapsulated in the request. 2: The original file should be blocked or rejected due to container or mail policy violations. ThreadDescription:	X-Infection-Found: Type=0; Resolution=1; Threat=EICAR Test String; Explanation: The ICAP request contained data that is infected by the EICAR test string. The file was repaired (for example, the <code>eicar.com</code> file was removed from an archive and the remaining archive is sent back in the response).

HTTP Response X-Header	Description	Examples
	Human readable description of the threat. For example, the virus name or the policy violation description. It may contain spaces and should not be quoted. It must not contain semicolons, because it is terminated by the final semicolon of the header definition.	

Additional HTTP Response X-Headers

You can add additional HTTP response X-Headers for the ICAP Client to recognize.

Additional X-Headers

HTTP Response X-Header	Description	Examples
X-Response-Info	Contains a one word description of the action the ICAP Server applied on the HTTP request. This header is available in all responses sent by the ICAP Server.	X-Response-Info: Allowed X-Response-Info: Blocked X-Response-Info: Options
X-Response-Desc	Contains a one line description about the action that the ICAP Server applied on the content. This header is available in all "blocked" responses. In case of the content was scanned, and some violations were found, the returned string is equivalent to X-Blocked-Reason's value.	X-Response-Desc: Infected X-Response-Desc: Encrypted Archive
X-Include	Contains the list of requested HTTP headers, which the ICAP Client should add to the HTTP requests, if the information is available. This header is present only in HTTP Options responses. This header is a comma-separated list of any ICAP header extension field names that the ICAP Server wants the ICAP Client to add to the requests, if the information is available and the header is supported.	X-Include: X-Client-IP
X-Blocked-Reason	Metadefender specific custom header. Contains the blocking reason of the content. This header is available only if the content was scanned, and some violations were found.	X-Blocked-Reason: Infected

HTTP Response X-Header	Description	Examples
X-ICAP-Profile	Contains the applied workflow's name (user profile). This header is available only if the file was scanned.	X-ICAP-Profile: Proxy

Configuring the Additional HTTP Response X-Headers

You add the additional HTTP response X-Headers as values of the specific kernel parameter:

Item	Description
Name	icap_unwrap_append_header_str
Type	String
Notes	- Length of each added HTTP header is up to 80 characters - You can add up to 21 such HTTP headers - The ICAP Client also uses this HTTP response status: HTTP/1.0 403 Forbidden (according to RFC 3507).

For general instructions, see the [R82.10 Security Gateway Guide](#) > Chapter *Working with Kernel Parameters on Security Gateway*.

To see the list of the configured HTTP response X-headers

1. Set the value of this kernel parameter to the string '__print__':

```
fw ctl set str icap_unwrap_append_header_str '__print__'
```

2. Print the list of the configured HTTP headers:

```
dmesg | grep append_icap_unwrap_headers
```

Example:

```
[Expert@GW:0]# fw ctl set str icap_unwrap_append_header_str '__print__'
[Expert@GW:0]# dmesg | grep append_icap_unwrap_headers
[fw6_0];append_icap_unwrap_headers: ==> new icap_unwrap_headers array is: [ X-Virus-ID ; X-
Violations-Found ; X-Infection-Found ;]
[fw4_0];append_icap_unwrap_headers: ==> new icap_unwrap_headers array is: [ X-Virus-ID ; X-
Violations-Found ; X-Infection-Found ;]
[Expert@GW:0]#
```

To add an HTTP response X-Header in detect only mode temporarily**Note** - In this mode, the ICAP Client does not block the matched HTTP connections.

1. Set the value of this string kernel parameter to the name if the X-header:

```
fw ctl set str icap_unwrap_append_header_str '<Name of X-
header>'
```

2. Print the list of the configured HTTP headers:

```
dmesg | grep append_icap_unwrap_headers
```

Example:

```
[Expert@GW:0]# fw ctl set str icap_unwrap_append_header_str 'X-Response-Info'
[Expert@GW:0]# fw ctl set str icap_unwrap_append_header_str 'X-Response-Desc'
[Expert@GW:0]# fw ctl set str icap_unwrap_append_header_str '__print__'
[Expert@GW:0]# dmesg | grep append_icap_unwrap_headers
[fw6_0];append_icap_unwrap_headers: ==> new icap_unwrap_headers array is: [ X-Virus-ID ; X-
Violations-Found ; X-Infection-Found ; X-Response-Info ; X-Response-Desc ;]
[fw4_0];append_icap_unwrap_headers: ==> new icap_unwrap_headers array is: [ X-Virus-ID ; X-
Violations-Found ; X-Infection-Found ; X-Response-Info ; X-Response-Desc ;]
[Expert@GW:0]#
```

To delete all configured HTTP response X-Headers temporarily

1. Set the value of this kernel parameter to an empty string '':

```
fw ctl set str icap_unwrap_append_header_str ''
```

2. Print the list of the configured HTTP headers:

```
fw ctl set str icap_unwrap_append_header_str '__print__'
dmesg | grep append_icap_unwrap_headers
```

Example:

```
[Expert@GW:0]# fw ctl set str icap_unwrap_append_header_str ''
[Expert@GW:0]# fw ctl set str icap_unwrap_append_header_str '__print__'
[Expert@GW:0]# dmesg | grep append_icap_unwrap_headers
[Expert@GW:0]#
```

To restore the default configured HTTP response X-Headers temporarily

1. Set the value of this kernel parameter to the strings 'X-Virus-ID', 'X-Violations-Found', and 'X-Infection-Found':

```
fw ctl set str icap_unwrap_append_header_str 'X-Virus-ID'  
fw ctl set str icap_unwrap_append_header_str 'X-Violations-Found'  
fw ctl set str icap_unwrap_append_header_str 'X-Infection-Found'
```

2. Print the list of the configured HTTP headers:

```
fw ctl set str icap_unwrap_append_header_str 'X-Infection-Found'  
dmesg | grep append_icap_unwrap_headers
```

Configuring Additional HTTPS Status Code, which ICAP Client Sends in RESPMOD

In This Section:

Description	233
Configuring the HTTP Server Status Codes	233

Description

To send HTTP server response to an ICAP server in RESPMOD, you can configure HTTP server status codes that the ICAP Client sends to the ICAP server.

By default, the ICAP Client sends server status codes 1xx or 2xx.

Configuring the HTTP Server Status Codes

You add the HTTP server status codes as values of the specific kernel parameter:

Item	Description
Name	<code>icap_append_status_code_str</code>
Type	String
Notes	■ Length of each added server status code is from 1 to 3 characters ■ Accepted string values are: • '<i><Single Digit N></i>' - ICAP Client sends all status codes Nyz that start with the specified digit N (for example, if you set the value to '3', the ICAP Client sends status codes 3yz) • '<i><Two Digits NN></i>' - ICAP Client sends all status codes NNz that start with the specified two digits N (for example, if you set the value to '30', the ICAP Client sends status codes 30z) • '<i><Three Digits NNN></i>' - ICAP Client sends the specified status code NNN (for example, if you set the value to '304', the ICAP Client sends the status code 304) ■ You can add up to 10 server status codes

For general instructions, see the [R82.10 Security Gateway Guide](#) > Chapter *Working with Kernel Parameters on Security Gateway*.

To see the list of the configured HTTP server status codes

1. Set the value of this kernel parameter to the string '__print__':

```
fw ctl set str icap_append_status_code_str '__print__'
```

2. Print the list of the configured server status codes:

```
dmesg | grep icap_client_append_status_code
```

Example:

```
[Expert@GW:0]# fw ctl set str icap_append_status_code_str '__print__'
[Expert@GW:0]# dmesg | grep icap_client_append_status_code
[fw6_0];icap_client_append_status_code: ==> new 'status code' array is: [ 1 ; 2 ;]
[fw4_0];icap_client_append_status_code: ==> new 'status code' array is: [ 1 ; 2 ;]
[Expert@GW:0]#
```

To add an HTTP server status code temporarily

1. Set the value of this kernel parameter to the desired string (see the *Notes* above):

```
fw ctl set str icap_append_status_code_str 'N'
fw ctl set str icap_append_status_code_str 'N'
fw ctl set str icap_append_status_code_str 'NNN'
```

2. Print the list of the configured server status codes:

```
fw ctl set str icap_append_status_code_str '__print__'
dmesg | grep icap_client_append_status_code
```

Example:

```
[Expert@GW:0]# fw ctl set str icap_append_status_code_str '3'
[Expert@GW:0]# fw ctl set str icap_append_status_code_str '__print__'
[Expert@GW:0]# dmesg | grep icap_client_append_status_code
[fw6_0];icap_client_append_status_code: ==> new 'status code' array is: [ 1 ; 2 ; 3 ;]
[fw4_0];icap_client_append_status_code: ==> new 'status code' array is: [ 1 ; 2 ; 3 ;]
[Expert@GW:0]#
```

To delete all configured HTTP server status codes temporarily

1. Set the value of this kernel parameter to an empty string '':

```
fw ctl set str icap_append_status_code_str ''
```

2. Print the list of the configured HTTP headers:

```
fw ctl set str icap_append_status_code_str '__print__'  
dmesg | grep icap_client_append_status_code
```

Example:

```
[Expert@GW:0]# fw ctl set str icap_append_status_code_str ''  
[Expert@GW:0]# fw ctl set str icap_append_status_code_str '__print__'  
[Expert@GW:0]# dmesg | grep icap_client_append_status_code  
[Expert@GW:0]#
```

To restore the default configured HTTP server status codes temporarily

1. Set the value of this kernel parameter to the strings '1' and '2':

```
fw ctl set str icap_append_status_code_str '1'  
fw ctl set str icap_append_status_code_str '2'
```

2. Print the list of the configured server status codes:

```
fw ctl set str icap_append_status_code_str '__print__'  
dmesg | grep icap_client_append_status_code
```

Configuring Connection Timeout for ICAP Connections

Description

To release idle connections and unresponsive sessions to ICAP Servers, you can adjust the connection timeout (in seconds) in the ICAP Client.

Configuring the Connection Timeout

You configured the connection timeout as a value of the specific kernel parameter:

Item	Description
Name	icap_blade_conn_pool_timeout
Type	Integer
Notes	- Default value is 300 (seconds) - The ICAP Server should maintain its own Timeout/KeepAliveTimeout configurations to handle unexpected traffic lost from the ICAP Client side (for example, due to reboot or disconnect)

For general instructions, see the [R82.10 Security Gateway Guide](#) > Chapter *Working with Kernel Parameters on Security Gateway*.

To print the current connection timeout value

```
fw ctl get int icap_blade_conn_pool_timeout
```

Example:

```
[Expert@GW:0]# fw ctl get int icap_blade_conn_pool_timeout
icap_blade_conn_pool_timeout = 300
[Expert@GW:0]#
```

To set the connection timeout value temporarily

```
fw ctl set int icap_blade_conn_pool_timeout <Number>
```

Additional Information

You can cancel the reuse of ICAP Client-to-Server connections on your Security Gateway for ICAP requests/responses.

Use this kernel parameter:

Item	Description
Name	icap_blade_enable_reuse_opt

Item	Description
Type	Integer
Notes	▪ Accepted values: • 0 - Security Gateway does not reuse the ICAP Client-to-Server connections • 1 - Security Gateway reuses the ICAP Client-to-Server connections - each connection is reused and not closed after handling the successful ICAP requests ▪ Default value: 1

Configuring ICAP Client Data Trickling Parameters

Description

Patience pages provide a solution to appease users during relatively short delays in object scans. However, scanning relatively large objects, scanning objects over a smaller bandwidth pipe, or high loads on servers might disrupt the user experience, because connection timeouts occur. To prevent such time-outs, you can allow data trickling to occur. During the Data Trickling, the data transmits at a very slow rate to the client at the beginning of the scan, or near the very end.

Trickle from the Start mode

In Trickle from Start mode, the ICAP Client buffers a small amount of the beginning of the HTTP response body. As the ICAP Server continues to scan the HTTP response, the ICAP Client allows one byte per second to the HTTP Client. After the ICAP Server completes its scan, if the object is deemed to be clean (no HTTP response modification is required), the ICAP Client sends the rest of the object bytes to the HTTP Client at the best speed allowed by the connection. If the object is deemed to be malicious, the ICAP Client terminates the connection and the remainder of the HTTP response object. Trickling from the Start is the more secure Data Trickling option, because the HTTP Client receives only a small amount of data pending the outcome of the virus scan.

Trickle at the End mode

In Trickle at End mode, the ICAP Client sends the HTTP response to the HTTP Client at the best speed allowed by the connection, except for the last 16KB of data. As the ICAP Server performs the content scan, the ICAP Client allows one byte per second to the HTTP Client. After the ICAP Server completes its scan, if the object is deemed to be clean (no HTTP response modification is required), the ICAP Client sends the rest of the object bytes to the HTTP Client at the best speed allowed by the connection. This method is more user-friendly than Trickle at Start. This is because users tend to be more patient when they notice that 99% of the object is downloaded versus 1%, and are less likely to perform a connection restart. However, network administrators might perceive this method as the less secure method, as a majority of the object is delivered before the results of the ICAP scan.

Notes about Data Trickling on Check Point Security Gateways

- There is no true data-modification (meaning, no true content adaptation) during the data trickling.

In the *Trickling at the End* mode, there is no data modification at all.

- Data Trickling (both *Trickling from the Start* and *Trickling at the End* modes) cannot work when there is no *Content-length* header in the HTTP message.
- In the *Trickling at the End* mode, Check Point Security Gateway supports the 204 status code (with the HTTP header "Allow: 204", for HTTP reply "No change / Unmodified").
- There is still an applicative timeout (`:icap_servers ()-:timeout`) of the ICAP session that user needs to define according to the `icap-service` demand, after which the `fail-action` follows.

The applicative timeout is also a factor in determining the maximum buffer size for *Trickling from the Start* mode..

Configuring ICAP Client Data Trickling

You configure the ICAP Client Data Trickling with the specific kernel parameters on Security Gateway.

For general instructions, see the [R82.10 Security Gateway Guide](#) > Chapter *Working with Kernel Parameters on Security Gateway*.

Kernel Parameter 1

Item	Description
Name	<code>icap_blade_trickling_bytes_ps</code>
Description	Specifies how many bytes per second to send to the original HTTP destination, while <i>Trickling from the Start</i> works. The HTTP Client sees very slow upload and download progress.
Type	Integer
Default value	10
Notes	The configured value must be much less than the byte-rate of the ICAP connection.
Example	If the ICAP Server scans a file with the size of ~600 kilobytes for a 1 minute, the ICAP connection byte-rate is ~10 kilobytes per second. Therefore, the configured value must be much less than 10,000 bytes per second.

Kernel Parameter 2

Item	Description
Name	<code>icap_blade_trickling_interval</code>
Description	Specifies the interval in seconds for sending bytes to the original HTTP destination, while <i>Trickling from the Start</i> works.
Type	Integer
Default value	1
Notes	The configured value must be more than or equal to 1.
Example	Value 2 means that the ICAP Client sends bytes to the original HTTP destination only every 2 seconds.

Kernel Parameter 3

Item	Description
Name	<code>icap_blade_trickling_threshold_mb</code>
Description	Specifies the <i>Content-Length</i> threshold in megabytes. Only if the HTTP <i>Content-Length</i> of the original HTTP connection is greater than this threshold, the <i>Trickling from the Start</i> is activated.
Type	Integer
Default value	0
Example	Value 1 means: ▪ The ICAP Client sends only files that are larger than 1 megabyte to the original HTTP destination. ▪ The ICAP Client does not send all other files before it gets the verdict from the ICAP Server.

Kernel Parameter 4

Item	Description
Name	<code>icap_blade_trickling_kbytes_from_end</code>
Description	During the <i>Trickling at the End</i> mode, specifies how many kilobytes ICAP Client does not send to the original HTTP destination before the ICAP Client gets the verdict from the ICAP Server.
Type	Integer
Default value	16
Example	Value 16 means: ▪ The ICAP Client does not send only the last 16 kilobytes of the file before it gets the verdict from the ICAP Server. ▪ The ICAP Client sends all other files to the original HTTP destination in the HTTP connection byte-rate.

The Security Gateway as an ICAP Server

In This Section:

Check Point ICAP Server can work with multiple ICAP Clients.

Check Point ICAP Server is supported on R80.20 Security Gateways and higher for the Threat Emulation and Anti-Virus blades. From R81, ICAP Server also supports the Threat Extraction blade.

To activate the ICAP Server on a Security Gateway object in SmartConsole, you must first enable Threat Emulation and/or Anti-Virus and/or Threat Extraction on that Security Gateway object.

If you enable ICAP Server on the Security Gateway and not enable the Threat Emulation Anti-Virus, or Threat Extraction blades, the ICAP Server runs but without inspection.

The ICAP Server operates according to the relevant settings defined for Threat Emulation, Threat Extraction and Anti-Virus in the selected Threat Prevention profile and engine settings.

ICAP Server functionality is not supported in ClusterXL Load Sharing mode.

ICAP Server supports only Anti-Virus deep-scan. Any additional functionality, such as MD5 hash, URL reputation, and signature-based protection, is not supported.

If you enable the ICAP Server on a Check Point Cluster object:

- You must configure your ICAP Clients to communicate with the applicable Virtual IP Address of the Check Point Cluster.
- ICAP connections do not survive cluster failover.

ICAP Server Actions


Check Point ICAP Server has 3 possible actions:

ICAP Action	Description and Example
Block	▪ ICAP Server sends an error to the ICAP Client. ▪ ICAP Server sends a block page to the ICAP Client. For example: A Check Point UserCheck page presented by the Threat Emulation, Anti-Virus, or Threat Extraction Software Blades.
Continue / Not modified	A default gateway or a proxy server can forward the HTTP Request / Response to its original destination.

ICAP Action	Description and Example
File modification	Applicable when Threat Extraction is activated. The ICAP Server modifies the HTTP/HTTPS content and sends the modified content to the ICAP Client.

ICAP Server Workflow

Sample Workflow

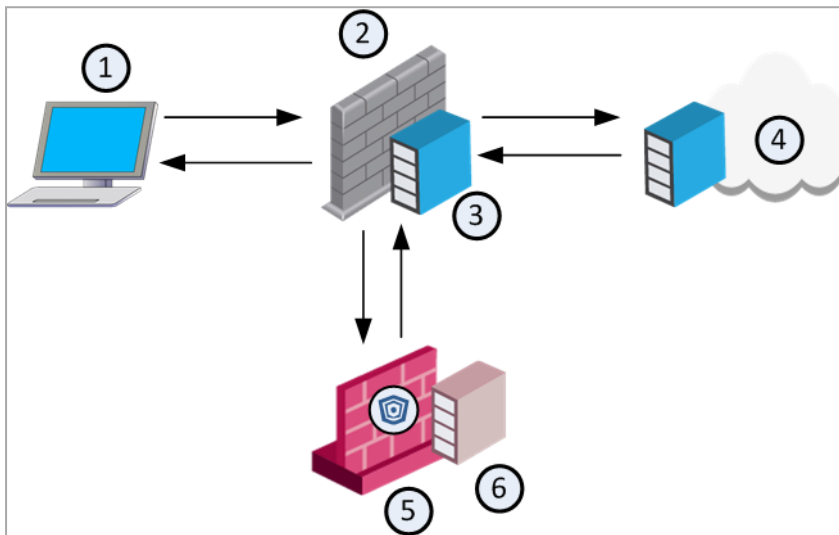

Item No.	Description
1	Client
2	Third party gateway or proxy
3	ICAP Client
4	Web server
5	Check Point gateway
6	ICAP Server

Workflow example for working with Check Point ICAP Server in RESPMOD

Step	Instructions
1	The client sends a request to the third party gateway/proxy server to download a file.
2	The third party gateway/proxy sends the download request to the Web server.

Step	Instructions
3	The Web server sends the requested file to the third party gateway/proxy.
4	The ICAP Client forwards the file to the ICAP Server which is in the Check Point Threat Emulation gateway.
5	The ICAP Server sends the file to the Threat Emulation engine.
6	The Threat Emulation checks the file a. The Threat Emulation engine returns a verdict (block, modified or continue) to the ICAP Server. b. The ICAP Server sends the verdict to the ICAP Client. c. The ICAP Client sends the verdict to the client.

Getting Started with ICAP Server

To enable ICAP Server support on the Security Gateway / Cluster:

Instructions

1 Enable ICAP Server support on the Check Point Security Gateway or Cluster

- a. From the left navigation panel, click **Gateways & Servers**.
- b. Double-click the Security Gateway / Cluster object.
- c. From the left tree, go to **ICAP Server**.
- d. Select **Enable ICAP Server**.
- e. In **Service**, the default service is TCP ICAP, which runs on port 1344.

Optional: You can create a new ICAP service and use it instead of the default service

- i. Go to the Object Explorer and select **New > More > Service > TCP**.
- ii. Enter the object name and add a comment if necessary.
- iii. In **General**, do not select a protocol.
- iv. In **Match By**, select the **Port** you want the service to run on.
- v. **Optional:** Configure the **Advanced** features. For a detailed explanation on the advanced service features, check the online help.
- vi. Click **OK**

The new service now appears in the drop-down **Service** list.

Optional: You can create a new ICAP service to work over TLS

From R81.20, Check Point Security Gateway supports encrypted connection between the ICAP Server and ICAP Client.

- i. Go to the Object Explorer and select **New > More > Service > TCP**.
- ii. Enter the object name and add a comment if necessary.
- iii. In **General**, do not select a protocol.
- iv. In **Match By**, select the **Port** you want the service to run on.
- v. **Optional:** Configure the **Advanced** features. For a detailed explanation on the advanced service features, check the online help.
- vi. Click **OK**.
- vii. Create the CA certificate and ICAP Server certificate through your application of choice.
- viii. Export the certificates in PEM file formats:
- ix. Copy the server certificate "icapcert.pem" to the Security Gateway / each Cluster Member to some directory (for example, /home/admin).
- x. Connect to the command line on the Security Gateway / each Cluster Member.
- xi. Log in to the Expert mode.
- xii. Edit the ICAP Server configuration file:

```
vi $FWDIR/c-icap/etc/c-icap.conf
```

Instructions

- xiii. Add this line with the path of the server certificate:

```
TlsPort [port_number]
cert=/home/admin/icapcert.pem
```

- xiv. Save the changes in the file and exit the editor.
 xv. Load the updated ICAP Server configuration with this command on the Security Gateway / each Cluster Member.:

```
icap_server reconf
```

- xvi. Copy the CA certificate PEM file of the ICAP Server to the ICAP Client.
 xvii. Configure the ICAP Client so it is able to connect to the ICAP Server over TLS. Note these parameters:

- ICAP protocol (icaps - for TLS).
- ICAP Server IP address and port number.
- Direct the ICAP modification requests to the ICAP Server SandBlast service.
- TLS specifications

For example:

Third party ICAP Client (Squid) configuration:

```
adaptation_send_client_ip on
adaptation_send_username on
icap_client_username_encode on
icap_client_username_header X-Authenticated-User
icap_service service_req_pre reqmod_precache
icaps://<IP_ADDRESS>:<PORT_NUMBER>/sandblast tls-
cafile=<CERTIFICATE_FILE> tls-domain=<DOMAIN_NAME>
icap_service service_req_post reqmod_postcache
icaps://<IP_ADDRESS>:<PORT_NUMBER>/sandblast tls-
cafile=<CERTIFICATE_FILE> tls-domain=<DOMAIN_NAME>
icap_service service_resp_pre respmod_precache
icaps://<IP_ADDRESS>:<PORT_NUMBER>/sandblast tls-
cafile=<CERTIFICATE_FILE> tls-domain=<DOMAIN_NAME>
icap_service service_resp_post respmod_postcache
icaps://<IP_ADDRESS>:<PORT_NUMBER>/sandblast tls-
cafile=<CERTIFICATE_FILE> tls-domain=<DOMAIN_NAME>
adaptation_access service_req_post allow all
adaptation_access service_resp_pre allow all
adaptation_access service_resp_post allow all
```

- f. Configure **Fail Mode** - In case of an error, configure if requests to the ICAP server are blocked or allowed.
 g. You can configure an implied rule for ICAP in the Access Control policy.

Step	Instructions
	h. Click OK .
2	Configure the ICAP client to connect to the Gateway. See "Getting Started with ICAP Client" on page 201 .
3	Configure the ICAP rule When you enable ICAP Server in the Security Gateway or Cluster object, SmartConsole automatically creates a rule in the Threat Prevention Rule Base. One rule is created for each Security Gateway / Cluster that has ICAP Server enabled. Configure the applicable action in the Action column of this rule. You can select a different profile for each ICAP rule.  Notes: ■ In Threat Extraction > UserCheck settings, if you want to allow the user access the original file, you must configure access from the internal network to the ICAP server. This way, the client is able to download the original files (the internal network is connected to the ICAP client and not directly to the gateway or ICAP Server). ■ Unlike other Threat Prevention rules, you cannot create exceptions for an ICAP rule. ■ In Threat Emulation > General > Protected Scope, Threat Emulation scans all files, regardless of the option you select.
4	For Threat Extraction support, in the Threat Prevention profile editor, go to Threat Extraction > General page > Protocol > select Web (HTTP/HTTPS) .
5	To scan files with Anti-Virus, in the Threat Prevention profile, go to the Anti-Virus page, and select Enable deep inspection scanning (impacts performance) .

Step	Instructions
6	Configure advanced ICAP Server settings on the Security Gateway The ICAP Server uses processes to handle the requests it receives from the ICAP Client. Each process generates multiple threads, and each thread handles one request from the ICAP Client to the ICAP Server. The ICAP Server supports dynamic scaling of the number of processes for optimal performance. - From the left navigation panel, click Gateways & Servers. - Double-click the Security Gateway / Cluster object. - From the left tree, go to ICAP Server > Advanced. - Configure the applicable settings: The maximum allowed number of server processes The number of processes increases or decreases as needed. You can configure the maximum value. Range: 1-100 The maximum number of concurrent connections that the ICAP Server can handle: $(\text{The maximum allowed number of server processes}) \times (\text{The number of threads per a child process})$ The number of threads per a child process The number of available threads increases or decreases as needed. You can configure the maximum value. Range: 1-100 Start a new child process if the number of available threads is less than [x] This option allows dynamic growth and lets you configure the number of new threads as needed. The ICAP Server counts the total number of available (idle) threads. If this number is lower than the number configured in this field, it creates a new child process. End a child process if the number of available threads is more than [x] This option allows dynamic reduction of the number of threads as needed. The ICAP Server counts the total number of available (idle) threads. If this number is higher than the number configured in this field, it ends a child process. - Click OK. - Install the Threat Prevention Policy.
7	Install the Threat Prevention policy.

 Notes:

- For information on how to test ICAP Server functionality, see [sk174487](#).
- For information on how to add supported file types to ICAP Server, see [sk158313](#).

Related Configuration on the ICAP Client

When you work with Check Point ICAP Server, make sure to set this configuration on your ICAP Client.

Configuration for ICAP Client

- Direct the ICAP modification requests to the ICAP Server **sandblast** service.

For example: `icap://<IP_Address>:1344/sandblast`.

- Set the ICAP Client to send these headers, if possible:

- X-Client-IP
- X-Server-IP
- X-Authentication-User

These headers are used in the ICAP Server logs.

- Make sure the operation timeout for the ICAP Client is equal or higher than the operation timeout for the ICAP Server.

Note - The **sandblast** service on the Check Point ICAP Server can take some time to respond.

- For HTTPS traffic, configure the ICAP Client to send clear HTTP (decrypted HTTPS) traffic to the Check Point ICAP Server. If this option is not available on your ICAP Client, the ICAP Server is not able to process the traffic.

 Notes:

- For a detailed explanation on how to configure a Check Point ICAP Client, see ["Security Gateway as ICAP Client" on page 193](#)
- For a detailed explanation on how to configure a third party ICAP Client, see vendor's documentation.

Use Case

You can use the ICAP technology to communicate HTTPS content.


You are a system administrator, who manages a network that includes a third party gateway/proxy and a Check Point Security Gateway.

The Check Point Security Gateway enforces the Threat Emulation and Anti-Virus blades.

The third party gateway/proxy has HTTPS Inspection enabled, but the Check Point Security Gateway does not.

With the ICAP Client and Check Point ICAP Server enabled and configured to work together, the ICAP Client can send the decrypted traffic to the ICAP Server for inspection. This way, the Check Point Security Gateway can read the HTTPS content for the Threat Emulation and Anti-Virus blades, even if no HTTPS Inspection is enabled on the Check Point Security Gateway.

Workflow for ICAP technology in HTTPS Inspection

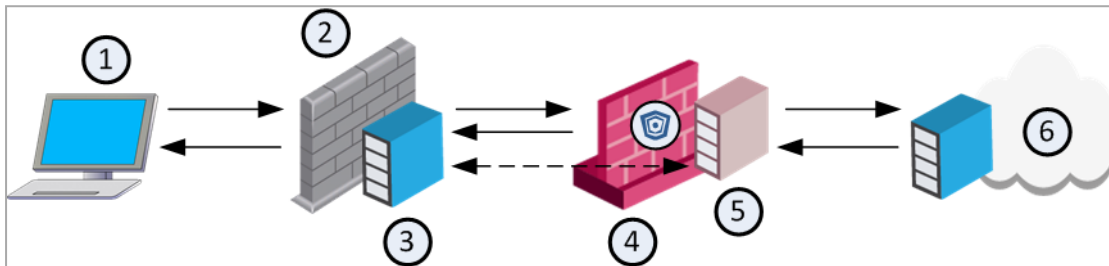

Item No.	Description
1	HTTPS client
2	Third party gateway or proxy
3	ICAP Client
4	Check Point Security Gateway
5	Check Point ICAP Server
6	Web server

Workflow:

Step	Instructions
1	The HTTPS client initiates an HTTPS connection, which is sent to the proxy server.
2	Proxy server forwards the HTTPS connection to the Check Point Security Gateway.
3	The Check Point Security Gateway forwards the HTTPS connection to the web server.
4	The web server sends the requested data over HTTPS to the Check Point Security Gateway.

Step	Instructions
5	The Check Point Security Gateway forwards the HTTPS connection to the proxy server.
6	The ICAP Client decrypts the HTTPS connection (the ICAP Client is configured to work in RESPMOD).
7	The ICAP Client sends the decrypted HTTPS content to the ICAP Server for a verdict.
8	The ICAP Server returns a verdict to the ICAP Client.
9	Based on the verdict, the proxy server allows or blocks the requested HTTPS data.

Monitoring Threat Prevention - Custom Threat Prevention

Networks today are more exposed to cyber-threats than ever. This creates a challenge for organizations in understanding the security threats and assessing damage. SmartConsole helps the security administrator find the cause of cyber-threats, and remediate the network.

The **Logs & Events > Logs** view presents the threats as logs.

The other views in the **Logs & Events** view combine logs into meaningful security events. For example, malicious activity that occurred on a host in the network in a selected time interval (the last hour, day, week or month). They also show pre- and post-infections statistics.

You can create rich and customizable views and reports for log and event monitoring, which inform key stakeholders about security activities. For each log or event, you can see a lot of useful information from the ThreatWiki and IPS Advisories about the malware, the virus or the attack.

Log Sessions

Gateway traffic generates a large amount of activity. To make sure that the amount of logs is manageable, by default, logs are consolidated by session. A session is a period that starts when a user first accesses an application or site. During a session, the gateway records one log for each application or site that a user accesses. All activity that the user does within the session is included in the log.

To see the number of connections made during a session, see the **Suppressed Logs** field of the log in the **Logs & Events** view.

Session duration for all connections that are prevented or detected in the Rule Base is, by default, 10 hours. You can change this in the **Manage & Settings** view in SmartConsole > **Blades > Threat Prevention > Advanced Settings > General > Connection Unification**.


Using the Log View

In SmartConsole

Step	Instructions
1	Go to Logs and Monitoring > View .
2	Click New , and then select New View .

Step	Instructions
3	In the New View window, enter: ■ Name ■ Category - For example, select Access Control ■ Description - (optional)
4	In the new window that opens, create a query. Click Options > View Filter and select Blade and App control .
5	To customize how you see the data that comes back from the query, click Add Widget. Start with a Timeline of all events. In Table, you can create a table that contains multiple field such as user, application name, and the amount of traffic. Additional widgets for use: map, infographic, rich text, chart, and container (for multiple widgets). After you save the changes in SmartConsole, you can schedule and get an automatic email at multiple intervals.

This is an example of the Log view:

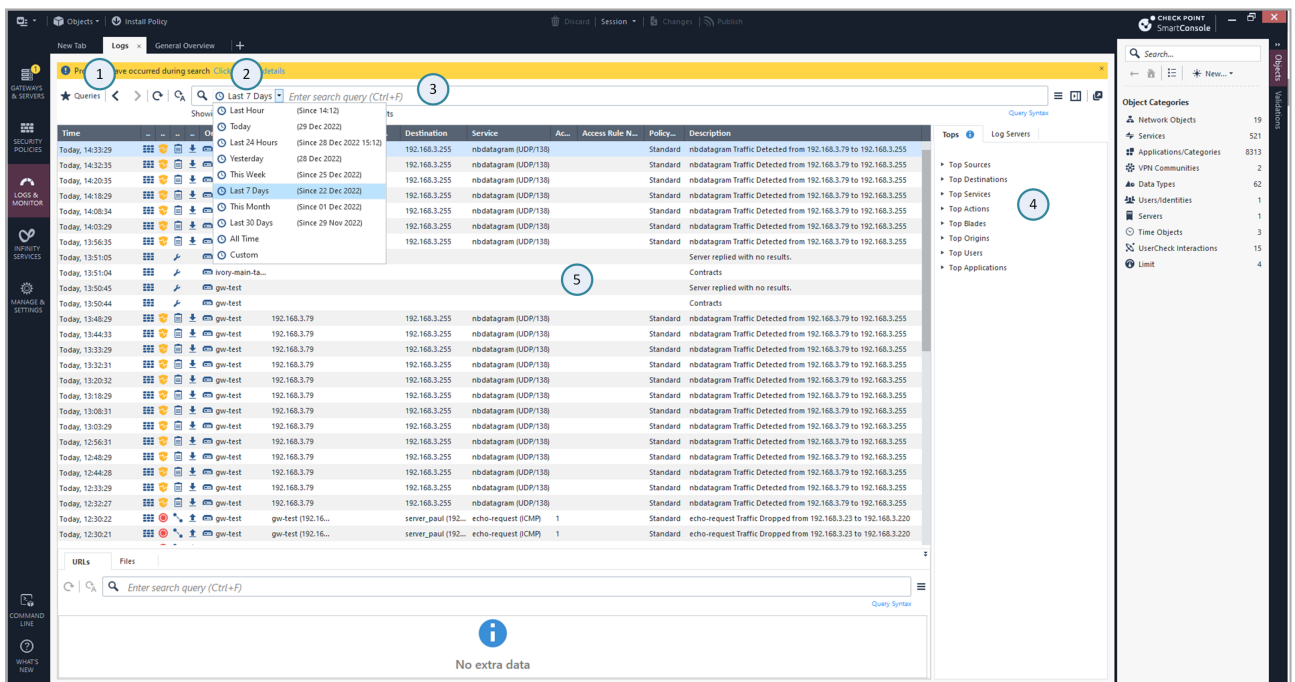

Item	Description
1	Queries - Predefined and favorite search queries.
2	Time Period - Search with predefined custom time periods.

Item	Description
3	Query search bar - Define custom queries in this field. You can use the GUI tools or manually enter query criteria. Shows the query definition for the most recent query.
4	Log statistics pane - Shows top results of the most recent query.
5	Results pane - Shows log entries for the most recent query.

Viewing Threat Prevention Rule Logs

To see logs generated by a specified rule

Step	Instructions
1	In SmartConsole, go to the Security Policies view.
2	In the Threat Prevention Policy , select a rule.
3	In the bottom pane, click one of these tabs to see: ▪ Summary - Rule name, rule action, rule creation information, and the Hit Count. Add custom information about the rule. ▪ Logs - Log entries according to specified filter criteria - Source, Destination, Blade, Action, Service, Port, Source Port, Rule (Current rule is the default), Origin, User, or Other fields.

Predefined Queries

The **Logs & Events Logs** tab provide a set of predefined queries, which are appropriate for many scenarios.

Queries are organized by combinations of event properties.

Example

- **Threat Prevention > by Blades.**
- **More >** such as by **UA Server** or **UA WebAccess**.
- **Anti-Spam & Email Security Blade >** such as by **Blocklist Anti-Spam**, or **IP Reputation Anti-Spam**.

Creating Custom Queries

Queries can include one or more criteria. You can modify an existing predefined query or create a new one in the query box.

To modify a predefined query:

Click inside the query box to add search filters.

To save the new query in the Favorites list

Step	Instructions
1	Click Queries > Add to Favorites . The Add to Favorites window opens.
2	Enter a name for the query.
3	Select or create a new folder to store the query.
4	Click Add .

Selecting Criteria from Grid Columns

You can use the column headings in the **Grid** view to select query criteria. This option is not available in the **Table** view.

To select query criteria from grid columns

Step	Instructions
1	In the Results pane, right-click on a column heading.
2	Select Add Filter .
3	Select or enter the filter criteria. The criteria show in the Query search bar and the query runs automatically.

To enter more criteria, use this procedure or other procedures.

Manually Entering Query Criteria

You can enter query criteria directly in the **Query search bar**. You can manually create a new query or make changes to an existing query that shows in the **Query search bar**.

As you enter text, the **Search** shows recently used query criteria or full queries. To use these search suggestions, select them from the drop-down list.

Selecting Query Fields

You can enter query criteria directly from the **Query search bar**.

To select field criteria

Step	Instructions
1	If you start a new query, click Clear  to remove query definitions.
2	Put the cursor in the Query search bar.
3	Select a criterion from the drop-down list, or enter the criteria in the Query search bar.

Packet Capture

You can capture network traffic. The content of the packet capture provides a greater insight into the traffic which generated the log. With this feature activated, the Security Gateway sends a packet capture file with the log to the Log Server. You can open the file, or save it to a file location to retrieve the information at a later time.

For some blades, the packet capture option is activated by default in the Threat Prevention Policy.

To deactivate packet capture (in the Threat Prevention policy only)

Step	Instructions
1	In SmartConsole > Security Policies view > Threat Prevention > Custom Policy .
2	Go to the required rule and right-click the Track column. Clear the Packet Capture option.

To see a packet capture

Step	Instructions
1	In SmartConsole, go to the Logs & Events view.
2	Open the log.
3	Click the link in the Packet Capture field. The Packet Capture opens in a program associated with the file type.
4	Optional: Click Save to save the packet capture data on your computer.

For further technical information on packet capture, see [sk184132 - Threat Prevention Packet Capture - Performance Impact and Considerations](#)

Advanced Forensics Details

Some logs contain additional fields which can be found in the Advanced Forensics Details section in the log. These protocols are supported: DNS, FTP, SMTP, HTTP, and HTTPS. The additional information is used by the Check Point researchers to analyze attacks. The advanced forensics details also show in the gateway statistics files which are sent to the Check Point cloud.

To disable the Advanced Forensics Details feature

Step	Instructions
1	In SmartConsole > go to Security Policies > Threat Prevention > Custom Policy .
2	Go to the required rule and select right-click the Track column.
3	Clear the Forensics option.

The Advanced Forensics Details do not show if the connection closes before this information is saved. This depends on the traffic and configuration of the Software Blades.

Example

- When the gateway finds the connection is malicious before the additional details are saved.
- When Threat Emulation or Anti-Virus are in Rapid Delivery mode, and file is downloaded and the connection closes before the examination of the file is complete. In such case, the Forensics details may not show.

Threat Analysis in the Logs & Events View

The **Logs & Events** view supplies advanced analysis tools with filtering, charts, reporting, statistics, and more, of all events that travel through enabled Security Gateways.

You can filter the Threat Prevention Software Blade information for fast monitoring and useful reporting on connection incidents related to them.

Available options

- Real-time and historical graphs and reports of threat incidents
- Graphical incident timelines for fast data retrieval
- Easily configured custom views to quickly view specified queries

- Incident management workflow
- Reports to data owners on a scheduled basis


Views

Views window tells administrators and other stakeholders about security and network events. A **View** window is an interactive dashboard made up of widgets. Each widget is the output of a query. A **Widget** pane can show information in different formats, for example, a chart or a table.

SmartConsole comes with several predefined views. You can create new views that match your needs, or you can customize an existing view. Views are accurate to the time they were generated or refreshed.

In the **Logs & Events** view, clicking the (+) tab opens a catalog of all views and reports, predefined and customized. To open a view, double-click the view or select the applicable view and click **Open** from the action bar.

Example View window

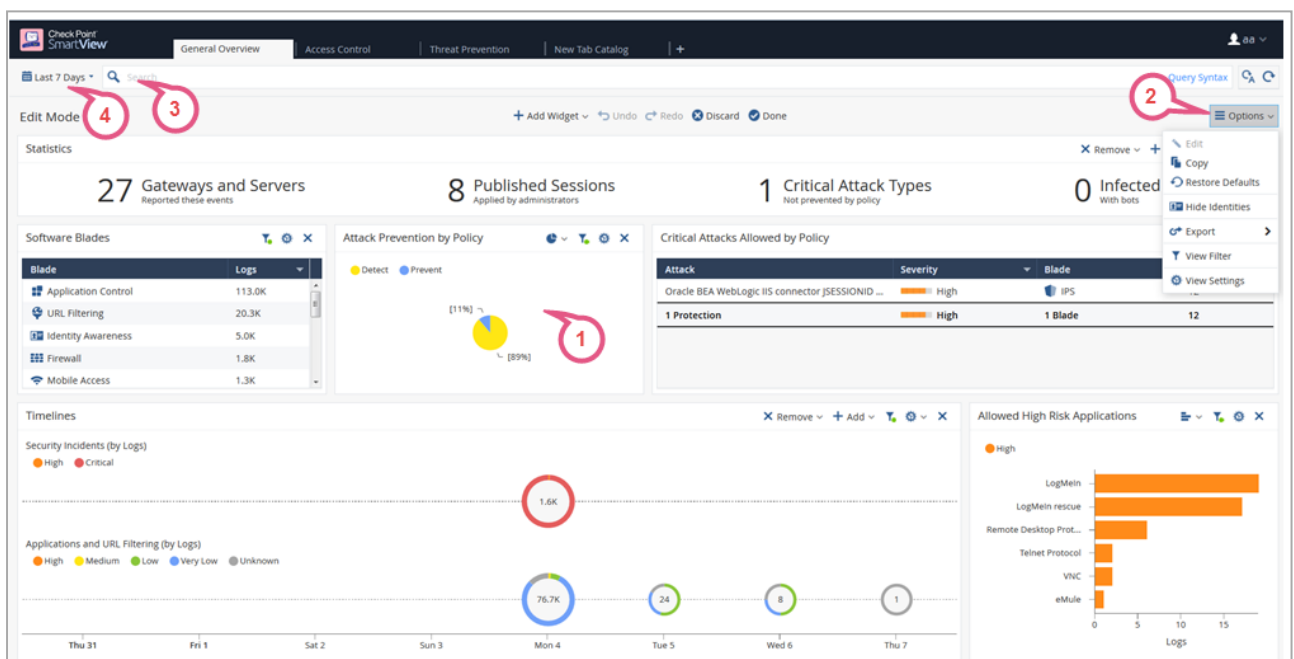

Item	Description
1	Widget - The output of a query. A Widget can show information in different formats, for example, a chart or a table. To find out more about the events, you can double-click most widgets to drill down to a more specific view or raw log files.
2	Options - Customize the view, restore defaults, Hide Identities, export.

Item	Description
3	Query search bar - Define custom queries using the GUI tools, or manually entering query criteria. Shows the query definition for the most recent query.
4	Time Period - Specify the time periods for the view.

For more information on using and customizing reports, see the [R82.10 Logging and Monitoring Administration Guide](#).

Reports

A report consists of multiple views and a cover page. There are several predefined reports, and you can create new reports. A report gives more details than a view. Reports can be customized, filtered, generated and scheduled. You cannot drill down into a report.

Click the (+) tab to open a catalog of all views and reports, predefined and customized. To open a report, double-click the report or select the applicable report and click **Open**.

For more information on using and customizing reports, see the [R82.10 Logging and Monitoring Administration Guide](#)

Log Fields

See ["Log Fields" on page 504](#).

How to Investigate Threat Prevention Events

- ["Cyber Attack View - Gateway" on page 441](#)
- ["MITRE ATT&CK" on page 498](#)

Threat Prevention Scheduled Updates - Custom Threat Prevention

Introduction to Scheduled Updates

Check Point wants the customer to be protected. When a protection update is available, Check Point wants the configuration to be automatically enforced on the gateway. You can configure automatic gateway updates for Anti-Virus, Anti-Bot, Threat Emulation and IPS.

For Anti-Virus, Anti-Bot and Threat Emulation, the gateways download the updates directly from the Check Point cloud.

For IPS, prior to R80.20, the updates were downloaded to the Security Management Server, and only after you installed policy, the gateways could enforce the updates. Starting from R80.20, the gateways can directly download the updates. For R80.20 gateways and higher with no internet connectivity, you must still install policy to enforce the updates.

When you configure automatic IPS updates on the gateway, the action for the newly downloaded protections is by default according to the profile settings.

IPS, Anti-Virus and Anti-Bot updates are performed every two hours by default. Threat Emulation engine updates are performed daily at 05:00 by default, and Threat Emulation image updates are performed daily at 04:00 by default.

You can see the list of Anti-Bot and Anti-Virus protections in **Custom Policy Tools > Protections**, and the list of IPS protections in **Custom Policy Tools > IPS Protections**. The update date appears next to each protection.

Configuring Threat Prevention Scheduled Updates

To configure Threat Prevention scheduled updates

In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy > Custom Policy Tools**

Step	Instructions
1	Go to Updates .
2	Go to the section about the required Software Blade, click Schedule Update . The Scheduled Updates window opens.
3	Make sure Enable <blade> scheduled updates is selected.

Step	Instructions
4	For IPS, there are 2 more configuration options for scheduling Security Management Server updates ▪ On successful IPS update on the Security Management Server, install policy on the Security Gateway - automatically installs the policy on the devices you select after the IPS update is completed. Click Configure to select these devices. Note - In Security Gateways R77.30 and lower, IPS was part of the Access Control policy. Therefore, when you select this option, a message appears that on Security Gateways R77.30 and lower, the Access Control policy is installed, and on Security Gateways R80.10 and higher gateways, the Threat Prevention policy is installed. ▪ Perform retries on the Security Management Server when the update fails - lets you configure the number of tries the scheduled update makes if it does not complete successfully the first time.
5	Click Configure .
6	In the window that opens, set the Time of event ▪ Update every: set the update frequency by hours OR - ▪ Update at: set the update frequency by days: • Daily - Every day • Days in week - Select days of the week • Days in month - Select dates of the month
7	Click OK .
8	Click Close .
9	Install the Threat Prevention policy.

Checking Update Status

In **Custom Policy Tools > Update**, a message shows which indicates the number of gateways which are up-to-date.

To check if the protections are update on a specific gateway

Step	Instructions
1	In the Gateways & Servers view, select a gateway.

Step	Instructions
2	Right-click the gateway, and select the Monitor button. The Device & License Information window opens.
3	The Device Status page shows the gateway status.

Turning Off IPS Automatic Updates on a Gateway

You can turn off automatic IPS updates on a specific gateway.

To turn off automatic IPS updates on a specific gateway

Step	Instructions
1	In SmartConsole, to the Gateways & Servers view, and double-click a gateway. The gateway properties window opens.
2	In the navigation tree, go to IPS .
3	In IPS Update Policy , select Use IPS management updates .
4	Click OK .
5	Install the Threat Prevention Policy.

IPS Updates Use Cases

These scenarios explain how an upgrade of the Security Gateways or the Security Management Server or both, affects the Scheduled Updates configuration.

Scenario 1:

Upgrading the Security Management Server to R80.20, and not upgrading the gateways to R80.20

If you do not upgrade the Security Gateways, then after the upgrade, the Security Gateways are still not able to receive the updates independently, only through the Security Management Server. In this case, the configuration stays the same compared to before the upgrade: Scheduled Updates will be enabled or disabled on the Security Management Server, depending on the configuration before the upgrade.

Scenario 2:

Upgrading the Security Gateways to R80.20 (with or without Security Management Server upgrade)

- If, before the upgrade, Scheduled Updates were configured on the Security Management Server with automatic policy installation, then after the upgrade, automatic IPS updates are still enabled on the Security Management Server, and are also applied to the upgraded gateways.
- If Scheduled Updates were disabled on the Security Management Server before the upgrade, then they remain disabled after the upgrade, both on the Security Management Server and the gateways.
- If, before the upgrade, Scheduled Updates were configured on the Security Management Server without automatic policy installation - then during the first policy installation after upgrade, a message shows which indicates that Security Gateways R80.20 and higher automatically update the IPS Protections. For Security Gateways R80.10 and lower, you must install policy to apply the updates.

SSH Deep Packet Inspection - Custom Threat Prevention

You can use the SSH Deep Packet Inspection ("SSH DPI") feature to decrypt and encrypt SSH traffic and let the Threat Prevention solution protect against advanced threats, bots, and other malware.

Key Motivation and Goals for SSH DPI

- Block SSH attacks
- Block the transmission of viruses through SCP and SFTP protocols
- Prevent brute force password cracking of SSH/SFTP servers
- Prevent the dangerous use of SSH Port forwarding
- Prevent using simple passwords like "password" when connecting to SSH/SFTP
- Prevent using vulnerable cryptography
- Prevent using vulnerable SSH clients and servers
- Prevent using port 22 for other protocols except for SSH

Note - Currently, these blades are supported: Anti-Virus, IPS and Threat Emulation.

SSH DPI Architecture

Similar to HTTPS Inspection, SSH DPI works as the man-in-the-middle.

```
SSH_CLIENT <=> Security Gateway <=> SSH_SERVER
```



Note - All TCP traffic should pass through the Security Gateway.

Enabling SSH Deep Packet Inspection on the Security Gateway

Prerequisite

Before enabling SSH DPI, check connectivity to the SSH Server.

To enable SSH DPI

1. On the Security Gateway, Run:

```
cpssh_config ion
```

2. Run this command:

```
fw fetch local
```

Or install the Access Control policy in SmartConsole

Disabling SSH Deep Packet Inspection on the Security Gateway

To disable SSH DPI

On the Security Gateway, run:

```
cpssh_config ioff
```

Viewing SSH DPI Status

To view the status of SSH DPI

On the Security Gateway, run:

```
cpssh_config istatus
```

Note - All ssh inspection settings will be saved after Security Gateway reboot.

Configuring SSH Deep packet Inspection

Add an inspected SSH server**To add a non-transparent inspected SSH sever****Notes:**

- The Security Gateway introduces the Server to the Client with a new public key.
- Public key must be in an OpenSSH file format. Example of a public key:

```
ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQGVx4hhzpPARO8tM/yCK4qZ52PxU0H/vo
6wM= root@xub24
```

Step	Instructions
1	Copy the SSH server's public key to the Security Gateway Note - In Linux, the key on the Security Gateway is <code>/etc/ssh/ssh_host_rsa_key.pub</code>
2	On the Gateway, run this command: <pre>cpssh_config -s -g SERVER_NAME -e /PATH/TO/RSA/KEY/THAT/YOU/COPIED.pub</pre> For example: If your ssh sever host is <code>my_ssh_server_host.com</code>, and you copy the key to <code>/home/admin/mykey.pub</code>, then you must run this command: <pre>cpssh_config -s -g my_ssh_server_host.com -e /home/admin/mykey.pub</pre>
3	Repeat steps 1 and 2 for every SSH server to be added.

To add a transparent inspected SSH sever

Notes:

- The Security Gateway introduces the Server to the Client with the original public key.
- Public key must be in an OpenSSH file format. Example of a public key:

```
ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQBAgQVx4hhzpPARO8tM/yCK4qZ52PxU0H/vo
6wM= root@xub24
```

Step	Instructions
1	Copy the SSH server's public and private key to the Security Gateway. Note - The keys on the Security Gateway are: ■ <code>/etc/ssh/ssh_host_rsa_key.pub</code> ■ <code>/etc/ssh/ssh_host_rsa_key</code>

Step	Instructions
2	Run this command: <pre>cpssh_config -s -a <SERVER_NAME> -e </PATH/TO/RSA/KEY/THAT/YOU/COPIED>.pub -i </PATH/TO/RSA/PRIVATE_KEY/THAT/YOU/COPIED>.pub</pre> For example: If your ssh sever host is <code>my_ssh_server_host.com</code> and you copy the keys to <code>/home/admin/mykey.pub</code>, then you must run this command: <pre>cpssh_config -s -a my_ssh_server_host.com -e /home/admin/mykey.pub -i /home/admin/mykey</pre>
3	Repeat steps 1 and 2 for every SSH server to be added.

To disable SSH port forwarding

On the Security Gateway, run:

```
cpssh_config -w Global -y Port_fowarding_Enabled -u 0
```

To run SSH DPI on a non-standard port (not TCP port 22)

Step	Instructions
1	In SmartConsole, from the right panel, select Objects > Services .
2	Right-click on the TCP , and then choose NEW TCP .
3	Enter a name for the new TCP service: - Select General > Protocol as SSH2. - Choose Match By > Customize to new port, and then set the port. For example, <code>22222</code>
4	Install the Access Control Policy.

To configure IPS package installation

Step	Instructions
1	In SmartConsole, enable the IPS Software Blade in the Security Gateway object.
2	Enable the IPS Software Blade in the corresponding Threat Prevention policy.

Step	Instructions
3	Install Threat Prevention Policy.

To configure the Anti-Virus inspection for SSH

Step	Instructions
1	In SmartConsole, enable the Anti-Virus Software Blade in the Security Gateway object.
2	Enable Anti-Virus Software Blade in the corresponding Threat Prevention policy.
3	Install Threat Prevention Policy.

SSH Deep Packet Inspection Settings

To view all settings

```
cpssh_config -q
```

To view available options for key exchange

On the Security Gateway, run:

```
cpssh_config -w KeyExchange
```

To view available options for cipher

On the Security Gateway, run:

```
cpssh_config -w Cipher
```

To view available options for MAC

On the Security Gateway, run:

```
cpssh_config -w Mac
```

To view available options for Hostkey

On the Security Gateway, run:

```
cpssh_config -w Hostkey
```

To set option

On the Gateway, run:

```
cpssh_config -w Cipher -y <OPTION> -u <VALUE>
```

For example, to disable `aes128-cbc`:

```
cpssh_config -w Cipher -y aes128-cbc -u 0
```

Client Authorization (authorization by keys - without passwords)

To enable client authorization

Step	Instructions
1	Configure the SSH server to do the authorization through keys. This is done by copying the public key from the client to the server in <code>~/.ssh/authorized_keys/</code> . For more details, see askubuntu.com .
2	Copy SSH client public and private keys (<code>mykey.pub</code> and <code>mykey</code>) to the Security Gateway.
3	Copy the SSH server public key (<code>serverkey.pub</code>) to the Security Gateway.
4	Run this command: <pre>cpssh_config -c -a <admin_username>@<my_ssh_server> -e /home/admin/mykey.pub -l /home/admin/serverkey.pub -i /home/admin/mykey</pre> Where: ▪ <code>admin_username</code> is the username on the SSH server ▪ <code>my_ssh_server</code> is the resolvable hostname of IP address of the SSH server ▪ <code>mykey.pub</code> and <code>mykey</code> are pairs of client keys

Cluster

Currently, we do not support keys syncing between cluster nodes automatically.

To manually sync the Cluster Members (after adding/modify/deleting keys)

On the Cluster Member, on which the keys were added, run these commands in the Expert mode:

```
cd $FWDIR/conf
tar -cvvf ssh.tar cpssh
scp cpssh.tar admin@HOST_OF_OTHER_GATEWAY_FROM_THE_CLUSTER:/tmp
```

On the other cluster members, run these commands in the Expert mode:

```
mv /tmp/cpssh.tar $FWDIR/conf
mv cpssh cpssh_backup
tar -xvzf cpssh.tar
killall -s HUP cpsshd
```

Troubleshooting

To make sure that SSH DPI is enabled

Connect to an SSH server with the `telnet` command.

The output should show **"SSH-2.0-cpssh"**

Example:

```
$ telnet 172.23.43.29 22
Trying 172.23.43.29...
Connected to 172.23.43.29.
Escape character is '^]'.
SSH-2.0-cpssh
```

Debugging

To collect Kernel Debug

1. Enable the debug flag "cpsshi" in the kernel debug module "fw".
2. Enable all the debug flags in the kernel debug module "CPSSH".

For instructions on the debugging procedures, see the [R82.10 Security Gateway Guide](#) > Chapter *Kernel Debug on Security Gateway*.

To collect User Space Debug

1. Create and then run this shell script:

```
#!/bin/sh
echo > $FWDIR/log/cpsshd.elg
for PROC in $(pidof cpsshd)
do
    fw debug $PROC on ALL=6
done
tail -f $FWDIR/log/cpsshd.elg
```

To stop the output, press the **CTRL+C** keys.

2. Replicate the issue, or wait for it to occur.
3. Disable the User Space logs with this command:

```
for PROC in $(pidof cpsshd) ; do fw debug $PROC off ALL=6 ;
done
```

4. Examine the log files:

```
$FWDIR/log/cpsshd.elg*
```

The Check Point ThreatCloud - Custom Threat Prevention

Check Point ThreatCloud is a dynamically updated service that is based on an innovative global network of threat sensors and organizations that share threat data and collaborate to fight against modern malware. Customers can send their own threat data to the ThreatCloud and benefit from increased security and protection and enriched threat intelligence. The ThreatCloud distributes attack information, and turns zero-day attacks into known signatures that the Anti-Virus Software Blade can block. The Security Gateway does not collect or send any personal data.

Participation in Check Point information collection is a unique opportunity for Check Point customers to be a part of a strategic community of advanced security research. This research aims to improve coverage, quality, and accuracy of security services and obtain valuable information for organizations.

The ThreatCloud repository contains more than 250 million addresses that were analyzed for bot discovery and more than 2,000 different botnet communication patterns. The ThreatSpect engine uses this information to classify bots and viruses.

For the reputation and signature layers of the ThreatSpect engine, each Security Gateway also has:

- A local database, the Malware database that contains commonly used signatures, URLs, and their related reputations. You can configure automatic or scheduled updates for this database.
- A local cache that gives answers to 99% of URL reputation requests. When the cache does not have an answer, it queries the ThreatCloud repository.
 - For Anti-Virus - the signature is sent for file classification.
 - For Anti-Bot - the host name is sent for reputation classification.

You can access the ThreatCloud repository from ThreatWiki: In a web browser, go to [Check Point ThreatWiki](#).

- In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy** > in the **Custom Policy Tools** section, click **ThreatWiki**.

SmartConsole - You can add specific malwares to rule exceptions when necessary.

1. In SmartConsole, go to **Security Policies > Threat Prevention > Custom Policy**.
2. Add an exception.
3. In the **Protection** column in the rule exception, click the plus sign.
4. Near the applicable protections, click the plus sign.

Data which Check Point Collects

When you enable information collection, the Check Point Security Gateway collects and securely submits event IDs, URLs, and external IP addresses to the Check Point Lab regarding potential security risks.

For example

```
<entry engineType="3" sigID="-1" attackName="CheckPoint -
Testing Bot" sourceIP="7alec646fe17e2cd"
destinationIP="d8c8f142" destinationPort="80"
host="www.checkpoint.com"
path="/za/images/threatwiki/pages/TestAntiBotBlade.html"
numOfAttacks="20" />
```

This is an example of an event that was detected by a Check Point Security Gateway. It includes the event ID, URL, and external IP addresses. Note that the data does not contain confidential data or internal resource information. The source IP address is obscured. Information sent to the Check Point Lab is stored in an aggregated form.

Configuring Check Point ThreatCloud on a Gateway

To configure the Security Gateway to share information with the Check Point ThreatCloud

Step	Instructions
1	Double-click the Security Gateway. The gateway window opens and shows the General Properties page.
2	Configure the settings for the Anti-Bot and Anti-Virus: - From the navigation tree click Anti-Bot and Anti-Virus. The Anti-Bot and Anti-Virus page opens. - To configure a Security Gateway to share Anti-Bot and Anti-Virus information with the ThreatCloud, select Support the global community by sharing attack data with Check Point ThreatCloud. - If you do not select this check box, no information is shared with Check Point about the attack. If you select this checkbox, you can select which information is exposed about the attack: Receive alerts about threats (requires sharing additional end-user data) - all attack information is exposed. Anonymize collected data (selected by default). Select one of these options: End-user data (selected by default) - End-user information is anonymized, gateway is exposed. End-user data and customer identity - both end-user and gateway data are hidden.

Step	Instructions
3	Configure the settings for IPS: - From the navigation tree, click IPS. The IPS page opens. - To configure a Security Gateway to share IPS information with the ThreatCloud, select Help Improve Check Point Threat Prevention product by sending anonymous information about feature usage, infections details and product customizations. Note - To disable sharing IPS information with the Check Point cloud, clear this option.
4	Click OK .

Check Point ThreatCloud Network

Check Point ThreatCloud is a dynamically updated service that is based on an innovative global network of threat sensors and organizations that share threat data and collaborate to fight against modern malware. Customers can send their own threat data to the ThreatCloud and receive protection updates with enriched threat intelligence.

Customers that participate in the ThreatCloud network can use the collected malware data to benefit from increased security and protection. The ThreatCloud can then distribute attack information, and turn zero-day attacks into known signatures that Anti-Virus can block.

When you send files to the ThreatCloud service for emulation, your network gets up-to-date threat information and operating system environments. The connection to the ThreatCloud is enabled by default. This connection gives many management features. We recommend to enable it. If you want to block this connection, you can change the default setting.

To block ThreatCloud

Step	Instructions
1	From the menu bar, click Global Properties .
2	In the navigation tree, go to Data Access Control
3	Clear: Help Check Point Improve the product by sending anonymous information .
4	Publish the SmartConsole session.
5	Restart SmartConsole.
6	Install the Policy.

Troubleshooting - Custom Threat Prevention

Troubleshooting the Threat Extraction Blade

This section covers common problems and solutions.

The Threat Extraction blade fails to extract threats from emails belonging to LDAP users

In **Global Properties > User Directory**, make sure that you have selected the **Use User Directory for Security Gateways** option.

Mails with threats extracted do not reach recipients

Step	Instructions
1	Make sure the Security Gateway passed the MTA connectivity test during the First Time Configuration Wizard. - Disable then enable the Threat Extraction blade. - Complete the First Time Configuration Wizard again. - Make sure the wizard passes the connectivity test.
2	Test the connection to the target MTA. - Connect to the command line on the Security Gateway. - Log in to the Expert mode. - Connect with Telnet to port 25 of the designated Mail Transfer Agent.

Threat Extraction fails to extract threats from emails

Step	Instructions
1	Open SmartConsole > Gateway Properties > Mail Transfer Agent .
2	Make sure you selected Enable as Mail Transfer Agent .
3	Access the organizations mail relay. Configure the Threat Extraction gateway as the relay's next hop.

Users stopped receiving emails

Step	Instructions
1	On the gateway command line interface, run: <pre>scrub queues</pre> If the queues are flooded with requests, the Threat Extraction load is too high for the Security Gateway. - Bypass the scrub daemon. Run: <pre>scrub bypass on</pre> - Ask affected users if they are now receiving their emails. If they are, reactivate Threat Extraction. To reactivate the scrub daemon, run: <pre>scrub bypass off</pre>
2	Make sure the queue is not full. - Run: <pre>/opt/postfix/usr/sbin/postqueue -c /opt/postfix/etc/postfix/ -p</pre> - If the queue is full, empty the queue. Run: <pre>/opt/postfix/usr/sbin/postsuper -c /opt/postfix/etc/postfix/ -d ALL</pre>  Important - When empty the queue, you lose the emails. - To prevent losing important emails, flush the queue. Flushing forcefully resends queued emails. Run: <pre>/opt/postfix/usr/sbin/postfix -c /opt/postfix/etc/postfix/ flush</pre>
3	If queues remain full, make sure that the MTA is not overloading the Security Gateway with internal requests. The MTA should be scanning only emails from outside of the organization.

Users have no access to original attachments

Make sure users are able to access the UserCheck Portal from the e-mail they get when an attachment is cleaned.

Step	Instructions
1	Click the link sent to users.
2	Make sure that the UserCheck Portal opens correctly.
3	If users are not able to access the UserCheck Portal but see the Gaia portal instead, make sure that accessibility to the UserCheck Portal is correctly configured. - In SmartConsole, open Gateway Properties > UserCheck. - Under Accessibility, click Edit. - Make sure the correct option is selected according to the topology of the Security Gateway.
4	Open CPView. Make sure the "access to original attachments" statistic is no longer zero.

Attachments are not scanned by Threat Extraction

The `scanned attachment` statistic in CPView fails to increment.

On the Security Gateway:

Step	Instructions
1	Make sure that the disk or directories on the Security Gateway are not full. - Run: <code>df -h /</code> - Run: <code>df -h /var/log</code>
2	Make sure directories used by Threat Extraction can be written to. Run: <code>touch /tmp/scrub/test</code> <code>touch /var/log/jail/tmp/scrub/test</code> <code>touch \$FWDIR/tmp/email_tmp/test</code>

CPView shows Threat Extraction errors

In CPView, on the `Software-blades > Threat-extraction > File statistics` page, the number for "internal errors" is high compared to the total number of emails.

If the ThreatSpect engine is overloaded or fails while inspecting an attachment, a log is generated. By default, attachments responsible for log errors are still sent to email recipients. To prevent these attachments being sent, set the engine's fail-over mode to **Block all connections**.

Step	Instructions
1	Go to Manage & Settings > Blades > Threat Prevention > Advanced Settings .
2	In the Fail Mode section, select Block all connections (fail-close) .

The Threat Extraction blade continues to scan, but attachments that generate internal system errors are prevented from reaching the recipient.

Corrupted attachments cannot be cleaned, and by default generate log entries in the Logs & Events view. Corrupted attachments are still sent to the email recipient.

To prevent corrupted attachments from reaching the recipient:

Step	Instructions
1	In SmartConsole, open Threat Prevention > Profiles > Profile > Threat Extraction Settings .
2	In the Threat Extraction Exceptions area, select Block for attachments.

Attachments look disordered after conversion to PDF

Step	Instructions
1	In Security Policies > Threat Prevention > policy , right-click the Action column and select Edit .
2	In Threat Extraction > File Types , select Process specific file types and click Configure . The File Types Configuration window opens.
3	For the PDF file type, set the extraction method to Clean .

To check MTA connectivity on a VSX Virtual System

Step	Instructions
1	Connect to the command line on the VSX Gateway.

Step	Instructions
2	Log in to Gaia Clish.
3	Go to the context of the applicable Virtual System: <code>vsenv <VSID></code>
4	Create the file <code>scrub_connectivity_results.txt</code> : <code>touch \$FWDIR/conf/scrub_connectivity_results.txt</code>
5	Test the connectivity with the Mail Server: <code>/etc/fw/scripts/scrub_cvsnvcheck_connectivity.sh <IP Address of Mail Server> \$FWDIR/conf/scrub_connectivity_results.txt</code>
6	Analyze this file: <code>\$FWDIR/conf/scrub_connectivity_results.txt</code>

Troubleshooting Threat Emulation

Using MTA with ClusterXL

When you enable MTA with a ClusterXL deployment, make sure that the standby cluster member is also able to connect to one or more of the next hops. If not, it is possible that when there is a failover to the standby member, emails in the MTA do not go to their destination.

Configuring Postfix for MTA

The Check Point MTA uses Postfix, and you can add custom user-defined [Postfix options](#).

To add Postfix options

Step	Instructions
1	Connect to the command line on the Security Gateway.
2	Create the file <code>mta_postfix_options.cf</code> : <code>touch \$FWDIR/conf/mta_postfix_options.cf</code>
3	Edit the file and add the definitions.
4	Save the changes in the file and exit the editor.
5	In SmartConsole, install the Threat Prevention policy.

Problems with Email Emulation

- ★ **Best Practice** - If you are blocking SMTP traffic with the Prevent action, we recommend that you enable MTA on the Security Gateway (see ["Configuring the Security Gateway as a Mail Transfer Agent" on page 178](#)). If you do not enable the MTA, it is possible that emails are dropped and do not reach the mail server.

Troubleshooting IPS for a Security Gateway

IPS includes the ability to temporarily stop protections on a Security Gateway set to Prevent from blocking traffic. This is useful when troubleshooting an issue with network traffic.

To enable Detect-Only for Troubleshooting

Step	Instructions
1	In SmartConsole, click Gateways & Servers and double-click the Security Gateway
2	From the left tree, click IPS .
3	In the Activation Mode section, click Detect Only .
4	Click OK .
5	Install the Access Control policy. All protections set to Prevent allow traffic to pass, but continue to track threats according to the Track setting.

Threat Prevention Policy Insights

Threat Prevention Policy Insights simplifies the management of the Threat Prevention policy and profiles by providing administrators with actionable, environment-specific insights.

Check Point's cloud calculates the insights and they are displayed per Policy Layer.

Key benefits

- Reduces administrator effort with fast, one-click remediation actions.
- Provides customized insights based on analysis of traffic passing through the Security Gateways.
- Optimizes security and performance by

- Detecting misconfigurations and configuration gaps
- Identifying high CPU-consuming protections
- Highlighting unoptimized Threat Prevention settings.

Supported Environments

- R82.10 and higher Standalone, High Availability, and Multi-Domain Security Management Servers.
- Any Check Point Security Gateway that is managed by a Security Management Server running R82.10 or higher.
- Threat Prevention Policy Insights is available only for environments hosted in the EU and US regions.

Limitations

- Threat Prevention Policy Insights is not supported for Smart-1 Cloud environments.
- Autonomous Threat Prevention is not supported.

Prerequisites

- Threat Prevention Policy Insights requires appropriate Check Point license. For detailed licensing information, contact [Account Services](#).

 **Note** - The license bundle for Threat Prevention Policy Insights includes license for Access Control Policy Insights. See [Access Control Policy Insights](#) for more information on this feature.

- Connect your Security Management Server to the Check Point Portal.

See [Connecting On-Premises Management Servers and Security Gateways to the Check Point Portal](#)

- Auto-update package (afw_AutoUpdate) version 82 or higher. The auto-update package is usually installed automatically when the version and Jumbo Hotfix Accumulator requirements are met. For manual installation instructions, see [sk183421](#).
- For Web SmartConsole users, Web SmartConsole Take 157 or higher.

Activating Threat Prevention Policy Insights

Note - Threat Prevention Policy Insights does not rely on **Log Sharing** or **Configuration**

- **Sharing**. Instead, it uploads Threat Prevention logs, profiles, rules, and objects to the Check Point Portal for analysis.

Procedure

Notes:

- After the activation process, the log analysis may take several hours (up to 48 hours in large environments). Therefore, suggestions do not appear immediately. Some insights can appear within a few days, while others require a longer period of time to appear.
- The insight calculation process runs every two weeks.

Types of Insights

- **Misconfiguration** - Recommendations regarding settings that are incorrect, incomplete, or not aligned with best practices.

For example: New IPS protections configured to Staging mode instead of according to the profile settings (Prevent).

- **Policy Optimization** - Recommendations for streamlining security operations and enhancing security and performance.

For example: An exception rule that is frequently matched, allowing malicious content into the environment.

- **IPS Profile Tuning** - Recommendations for adjusting IPS configuration based on protection usage and system impact.

For example: Overriding default settings for specific IPS protections to better fit your environment.

- **ERM (External Risk Management)** - Recommendations based on emerging risk and response data, leveraging Check Point's ERM platform.

For example: Verifying whether external access to a server is necessary, when a server is identified as vulnerable based on a specific CVE.

For information on how to activate ERM, see [sk184656](#).

Click [here](#) for detailed information regarding each insight.

Managing Threat Prevention Policy Insights

To view insights for a Policy Layer

1. In SmartConsole, go to the **Security Policies** view > **Threat Prevention**.
2. Click the **Insights** button at the top-left corner.

Each category in the Threat Prevention Policy Insights window shows:

- The latest date on which the presented information is based.
- The number of suggestions in that category.

Confidence Level

Each insight is assigned a confidence level that reflects its reliability and accuracy.

For example: Longer observation periods provide more comprehensive data, increasing the reliability of the insight.

Severity

Each insight is assigned a severity level that reflects how critical it is to address the issue for maintaining the security of your environment.

Available Actions

For each insight, you can select one of these options:

- **Apply** - Accept the insight. Threat Prevention Policy Insights implements the change automatically.

 **Note** - For certain suggestions, automatic remediation is not available. In these cases, you must follow the provided instructions to perform manual remediation.

Publish your session for the changes to take affect.

- **Decline** - Reject the insight. The insight moves to the **Declined suggestions** section.

To return a declined suggestion to the **Suggestions** section, select the suggestion and click **Undo decline**.

- **Decide later** - Move the suggestion to the **Decide later** section. This is useful for insights that require additional consideration.

In the **Decide later**, these are the available actions:

- **Apply** - Accept the change.
- **Decline** - Reject the change.
- **Move back** - Move the suggestion back to the **Suggestions** section.

Filtering Insights

You can filter the suggestions based on these categories:


- **Recommended** (the default option) - Suggestions with the highest calculated security impact and confidence.
- **All** - Valuable suggestions.

Note - Threat Prevention Policy Insights does not rely on **Log Sharing** or **Configuration Sharing**. Instead, it uploads Threat Prevention logs, profiles, rules, and objects to the Check Point Portal for analysis.

Autonomous Threat Prevention

Autonomous Threat Prevention is an innovative Threat Prevention management model that includes pre-defined security profiles. When you select a security profile, the Security Policy is created automatically. Autonomous Threat Prevention:

- Provides zero-maintenance protection from zero-day threats, and continuously and autonomously ensures that your protection is up-to-date with the latest cyber threats and prevention technologies.
- Empowers administrators with a one-click classification of the gateway role using out-of-the-box policy profiles based on your business and IT security needs.
- Streamlines configuration and deployment of policy profiles across your gateways.
- Provides simple and powerful customizations to best serve your organization's needs.

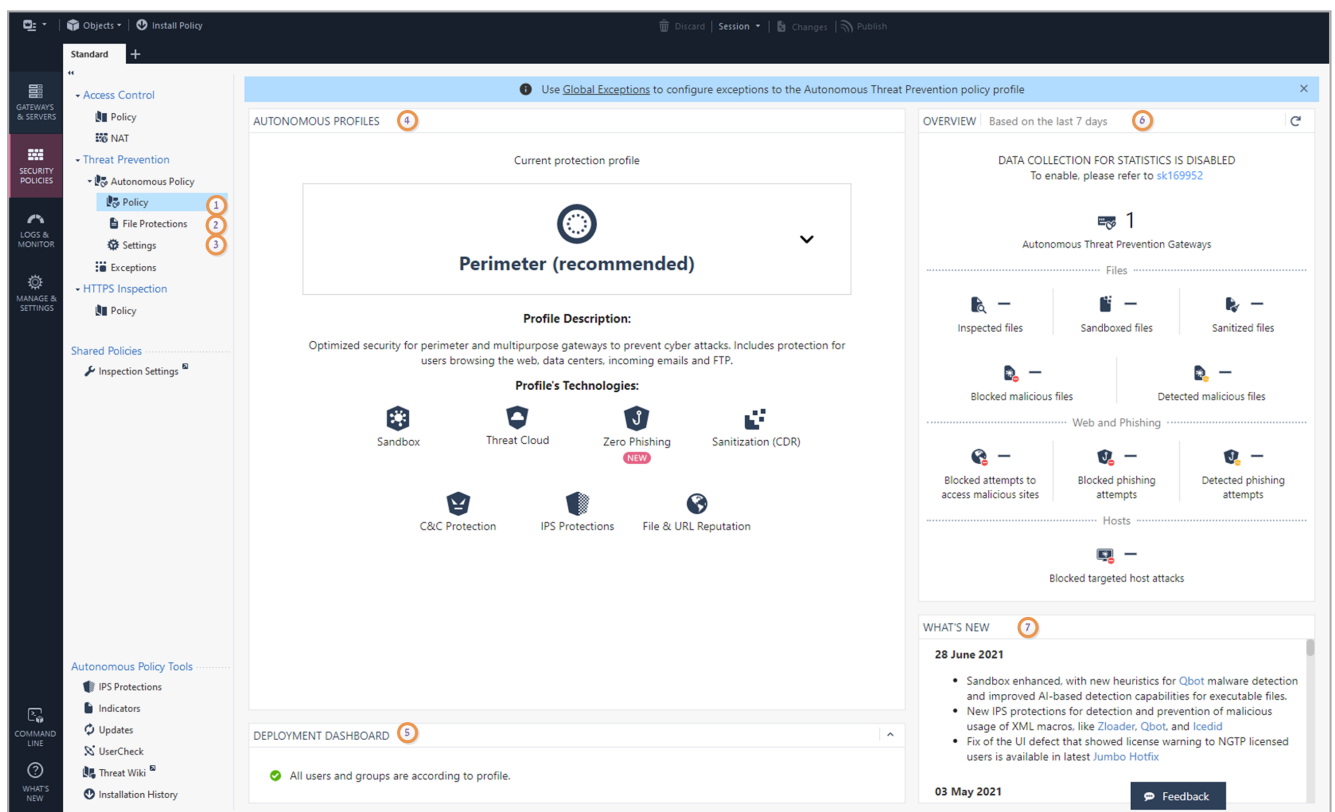

No.	Item	Description
1	Autonomous Threat Prevention Policy	This is where you manage the Autonomous Threat Prevention Policy.

No.	Item	Description
2	File Protections	See the protected files for each profile and customize as necessary. See "File Protections" on page 296 .
3	Settings	Advanced settings. See "Settings" on page 297 .
4	Autonomous Threat Prevention Profiles	Select your profile. See "Autonomous Threat Prevention Profiles" on the next page .
5	Deployment Dashboard	Advanced configuration. See "Deployment" on page 295 .
6	Overview	See information about how Autonomous Threat Prevention handles malware attacks. See "Autonomous Threat Prevention Overview Section" on page 337
7	What's New	See the updates introduced to Autonomous Threat Prevention.



Note - For **offline** Threat Extraction Engine Release Updates, refer to [sk167109](#).

If you prefer to create your Threat Prevention Security Policy manually, see ["Custom Threat Prevention" on page 34](#).

Getting Started with Autonomous Threat Prevention

1. Enable Autonomous Threat Prevention in the Security Gateway / Cluster object (see ["Configuring Autonomous Threat Prevention" on page 293](#)).
2. Select the required Autonomous Threat Prevention profile which creates the policy (see ["Autonomous Threat Prevention Profiles" below](#) and ["Configuring Autonomous Threat Prevention" on page 293](#)).
3. Optional: Configure advanced Threat Prevention settings:
 - **Security Gateway / Cluster** object - Settings for Threat Prevention Software Blades and features.
 - **Security Policies** view > **Threat Prevention** > **Autonomous Policy**:
 - **File Protections**
 - **Settings**
 - **Security Policies** view > **Threat Prevention** > **Exceptions**
 - **Security Policies** view > **Threat Prevention** > click **Autonomous Policy** > refer to the **Autonomous Policy Tools** section
 - **Security Policies** view > **HTTPS Inspection**
 - **Manage & Settings** view > **Blades** > **Threat Prevention** > **Advanced Settings**
 - **Security Gateway** / each **Cluster Member** command line - Configuration commands and files (for example, for SSH Deep Inspection)
4. Install the Autonomous Threat Prevention policy (see ["Configuring Autonomous Threat Prevention" on page 293](#)).

Monitoring

Use the **Logs & Events** page to show logs related to Threat Prevention traffic. Use the data there to better understand the use of these Software Blades in your environment and create an effective Rule Base. You can also directly update the Rule Base from this page.

You can add more exceptions that prevent or detect specified protections or have different tracking settings.

Autonomous Threat Prevention Profiles

These are the 6 profiles supported by Autonomous Threat Prevention:

■ Recommended for Perimeter Profile

Optimized security for perimeter gateway to prevent cyberattacks. Includes protection for users browsing the web, data centers, incoming emails, and FTP. This is the default profile and the recommended profile for multiple protections on the same gateway (for example, when both Perimeter protection and Internal network protection are needed).

Recommended for Perimeter is the most similar profile to the Optimized profile in the Custom Threat Prevention policy.

■ Strict Security for Perimeter Profile

Maximum security for perimeter gateways to prevent cyberattacks. Includes protection for users browsing the web, data centers, incoming emails and FTP.

■ Cloud/Data Center Profile

Optimized security to prevent cyberattacks on data centers. Includes extensive protection over servers and east-west traffic.

■ Internal Network Profile

Maximum security to prevent cyberattacks over internal traffic between internal users and internal servers.

■ Recommended for Guest Network Profile

"Detect mode" security profile to monitor cyberattacks attempts through a guest network (Wi-Fi) non-intrusively.

■ Monitor Profile

"Detect mode" security profile to generate logs and reports.

Each profile consists of a wide range of industry-leading protections. This table summarizes the technologies used by each profile:

Profile	IPS Protecti ons	File & URL Reputa tion	ThreatC loud	Sand box	Sanitiza tion (CDR)	C&C protect ion	Zero Phishing	
							URL- based Zero Phishi ng	In- brow ser Zero Phis hing
Recommen ded for Perimeter Profile	✓	✓	✓	✓	✓	✓	✓	—

Profile	IPS Protecti ons	File & URL Reputa tion	ThreatC loud	Sand box	Sanitiza tion (CDR)	C&C protect ion	Zero Phishing	
							URL- based Zero Phishi ng	In- brow ser Zero Phis hing
Strict Security for Perimeter Profile	✓	✓	✓	✓	✓	✓	✓	–
Cloud/Dat a Center Profile	✓	✓	✓	✓	–	✓	–	–
Internal Network Profile	✓	✓	✓	✓	–	✓	–	–
Recommen ded for Guest Network Profile	✓	✓	✓	✓	–	✓	–	–
Monitor Profile	✓	✓	✓	✓	✓	✓	✓	✓

Here is a short explanation about each technology:

- **IPS Protections** - Integrated Intrusion Prevention System with leading performance and unlimited scaling. IPS implements advanced protections from network-based attacks and protects all IT systems, including servers, endpoints, industrial systems and IoT.
- **File & URL Reputation** - Files and URLs are checked through the ThreatCloud repository for reputation.
- **ThreatCloud** - A cloud-based real-time global threat intelligence using Check Point worldwide network of threat sensors.
- **Sandbox** - Prevents unknown, zero-day and advanced polymorphic attacks by executing suspicious files in evasion-resistant sandbox and applying advanced AI techniques.

- **Sanitization (CDR)** - Provides pro-active prevention of unknown attacks from day zero, by sanitizing incoming files before delivering them to users.
- **C&C protection** - Detects infected and compromised devices on the network. It blocks attacks and prevents damages by blocking malware Command & Control (C&C) communications.
- **Zero Phishing** - Zero Phishing prevents unknown zero-day and known phishing attacks on websites in real-time, by utilizing industry leading Machine-Learning algorithms and patented inspection technologies.

Configuring Autonomous Threat Prevention

Limitations

The Global Domain does not support Autonomous Threat Prevention. Other Domains support it.

Configuration


To configure Autonomous Threat Prevention in your environment, follow these steps:

1. Enable Autonomous Threat Prevention on the Security Gateway

Step	Instructions
1	In SmartConsole, go to the Gateways & Servers view, and right-click the required Security Gateway.
2	In the General Properties page, go to the Threat Prevention tab, and select Autonomous Threat Prevention

2. Create an Autonomous Threat Prevention Policy

Step	Instructions
1	In SmartConsole, go to Security Policies > Autonomous Threat Prevention > Policy .

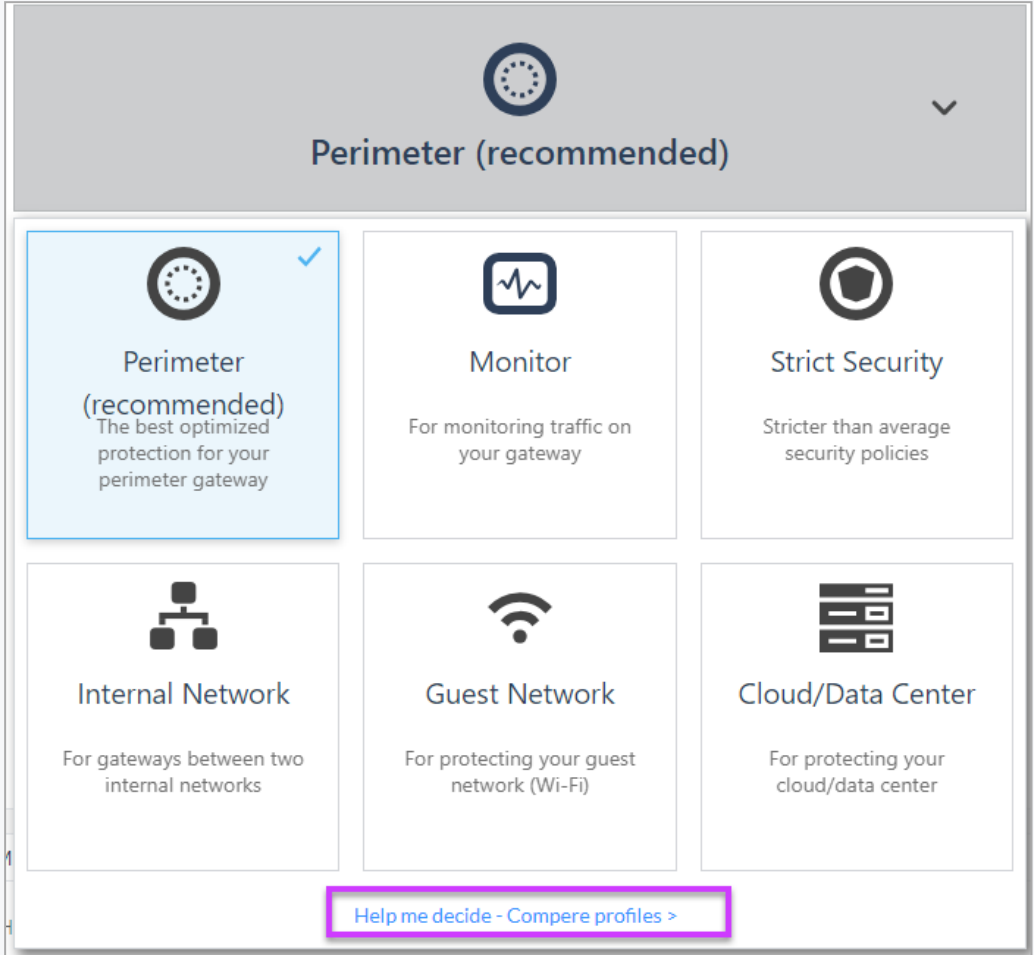Step	Instructions
2	Click the default profile name to see the list of profiles, and select the required profile. If you are not sure which profile to select, click the drop-down arrow next to the profile's name, and from the drop-down list, select Help me decide:  A table which specifies the differences between the profiles opens.
3	Based on the table, select the profile which best suits your needs.
4	Click OK .

 **Note-** Each profile shows a list of the technologies that it uses.

3. Install the Autonomous Threat Prevention Policy

Step	Instructions
1	In SmartConsole, from the toolbar, select Install Policy . The Install Policy window opens.

Step	Instructions
2	Select Threat Prevention .
3	Select the gateway targets for Policy installation.  Note - The Autonomous Threat Prevention Policy is installed on Security Gateways with Autonomous Threat Prevention enabled. Security Gateways with no Autonomous Threat Prevention enabled receive the Custom Threat Prevention Policy.
4	Click Install .

4. Using different Autonomous Threat Prevention profiles on different Security Gateways

You can use different Autonomous Threat Prevention profiles for different Security Gateways.

To do so, you must create a new policy package for each Security Gateway and follow the configuration steps, as follows:

Step	Instructions
1	In SmartConsole, create a new policy package. From the main menu, click the drop-down arrow and select Manage policies and layers . The Manage policies and layers window opens. Click New and configure the new policy package. For more information on policy packages, see the R82.10 Security Management Administration Guide .
2	Select the required Autonomous Threat Prevention profile. See "Create an Autonomous Threat Prevention Policy" on page 293 .
3	Install the Threat Prevention policy on the applicable Security Gateway. See "Install the Autonomous Threat Prevention Policy" on the previous page .

 **Note** - MTA (Mail Transfer Agent) is not supported by Autonomous Threat Prevention. You can manage a Security Gateway configured as MTA by Custom Threat Prevention.

Deployment

The **Deployment Dashboard** view:

- Shows this information:
 - Security Gateways with HTTPS Inspection disabled.
 - Security Gateways that do not support Zero Phishing (versions R81.10 and lower).
 - Security Gateways with no FQDN configured (FQDN configuration is required only for Zero Phishing).
 - Lets you gradually deploy Threat Prevention policy in your networks. The **Deployment Dashboard** includes these protection modes:
 - **According to profile** - The settings of the Threat Prevention profile apply to the object. By default any traffic is protected according to profile, and this is the recommendation. If gradual deployment is needed, you can put specific network objects in "**Detect only**". We recommend to move these object to the **According to profile** mode after a short trial period.
 - **No Protection** - The object is not protected by the selected Threat Prevention profile. Traffic is allowed and is not logged.
 - **Detect only** - Traffic is allowed, but it is logged according to the Threat Prevention profile settings.
-  **Note** - You can easily drag and drop objects from any of the protection modes to any other protection mode.

By default, the **No Protection** and **Detect Only** columns are empty, and the **According to Profile** column has one object: **Any**. When you add an object to the **No Protection** column or the **Detect Only** column, the object in the **According to Profile** column changes from **Any** to **All Other**.

File Protections

In the **File Protections** page, you can:

- View the protected file types and protection types for the selected Autonomous Threat Prevention profile.
- Override the recommended file protections according to profile and select different protections.

To configure file protections

1. Go to **Threat Prevention > Autonomous Threat Prevention > File Protections**
2. Click on the + sign and configure the required protection.

These are the available protections:

- **Inspect** - These technologies are operated: File Reputation, ThreatCloud and Sandbox. You can see Sandbox is enabled in the **Sandbox** column.
- **Inspect & Clean** - These technologies are operated: File Reputation, ThreatCloud, Sandbox and Sanitization (CDR). You can see Sandbox is enabled in the **Sandbox** column.
- **Block** - Block the file.
- **Bypass** - Do not inspect the file.

You cannot override the protections for file types which are not on the list. File types which are not on the list will be inspected in all profiles.

Settings

Sanitized File Settings

These options are selected by default:

- **Allow end-users to access the original files that are not malicious according to Sandbox** - After a file is cleaned/sanitized, a banner with a link to original file is added to the document. An access to original file will be allowed only if the original file is found to be benign by all Threat Prevention engines, including Sandbox. If you clear this option, you will not be able to access the original file even if it is determined as non-malicious.
- **Modify the name of the cleaned file** - Select this option to modify the name of the cleaned file.

Advanced Settings

You can override the profile definitions and enable or disable a certain feature or protection, as required. Use this tool to enable or disable DNS protections. We recommend to keep Sandbox, Sanitization and Archives deep scan On.

1. Click the plus (+) sign.
2. From the drop-down menu, select the required feature or protection.
3. Set to **On** or **Off** as required.
4. Click **Apply**.
5. Publish your changes.

Clearing NGTX Expiration Alerts in SmartConsole

If, after the NGTX license expires, and the NGTP license is installed, SmartConsole still shows an error message about the expiration of the NGTX license, you can disable the license status for the NGTX Software Blades.

Procedure

1. Connect to the command line on the Security Gateway / each Cluster Member/ Scalable Platform Security Group.
2. If the default shell is the Expert mode, go to Gaia Clish / Gaia gClish:

- On a Security Gateway / each Cluster Member, run:

```
clish
```

- On a Scalable Platform Security Group, run:

```
gclish
```

3. Disable the license status for the NGTX Software Blades. Run:

```
cplic ignore_expired_ngtx 1
```

4. Restart the Check Point services. Run:

```
cpstop
```

```
cpstart
```

5. If the Security Gateway / Cluster Member / Scalable Platform Security Group works in the VSNext / Traditional VSX mode, disable the license status for the NGTX Software Blades in the context of each applicable Virtual Gateway / Virtual System:

- a. Go to the context of the applicable Virtual Gateway / Virtual System, and run:

```
set virtual-system <ID>
```

- b. Disable the license status for the NGTX Software Blades:

```
cplic ignore_expired_ngtx 1
```

6. Restart the Check Point services:

```
cpstop
```

```
cpstart
```

Configuring Threat Emulation on the Security Gateway - Autonomous Threat Prevention

Important -On the 3900 appliances, Threat Emulation does not support Local Emulation (Known Limitation PMTR-115010).

Preparing for Local or Remote Emulation

For deployments that use a Threat Emulation appliance, prepare the network and Threat Emulation appliance for Local or Remote deployment in the internal network.

Step	Instructions
1	Open SmartConsole.
2	Create the Security Gateway object for the Threat Emulation appliance.
3	If you are running emulation on HTTPS traffic, configure the settings for HTTPS Inspection (see "HTTPS Inspection" on page 363).
4	Make sure that the traffic is sent to the appliance according to the deployment: - Local Emulation - The Threat Emulation appliance receives the traffic. The appliance can be configured for traffic the same as a Security Gateway. - Remote Emulation - The traffic is routed to the Threat Emulation appliance.

Changing the Analysis Location

You can select or change the location of the emulation analysis in the **Threat Emulation** page in **Gateway Properties**.

To select the location of the emulation analysis

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance. The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation . The Threat Emulation page opens.

Step	Instructions
3	From the Analysis Location section, select the emulation location: ■ According to the gateway - According to the gateway configuration. ■ Specify: • Check Point ThreatCloud - Files are sent to the Check Point ThreatCloud for emulation. • Local Gateway - This Security Gateway does the emulation. • Remote Emulation Appliances - Remote appliances do the emulation. You can select one or more appliances on which the emulation is performed.
4	Optional: Select Emulate files on ThreatCloud if not supported locally. If files are not supported on the Threat Emulation appliance and they are supported in the ThreatCloud, they are sent to the ThreatCloud for emulation. No additional license is necessary for these files.
5	Click OK .
6	Install the policy on the Threat Emulation appliance.

Setting the Activation Mode

You can change the Threat Emulation protection **Activation Mode** of the Security Gateway or Threat Emulation appliance. The emulation can use the action defined in the Threat Prevention policy or only Detect and log malware.

To configure the activation mode

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation . The Threat Emulation page opens.
3	From the Activation Mode section, select one of these options: ■ According to policy ■ Detect only
4	Click OK , and then install the policy.

Optimizing System Resources

The **Resource Allocation** settings are only for deployments that use a Threat Emulation appliance. Threat Emulation uses system resources for emulation to identify malware and suspicious behavior. You can use the Resource Allocation settings to configure how much of the Threat Emulation appliance resources are used for emulation. When you change these settings, it can affect the network and emulation performance.

You can configure the settings for these system resources:

- Minimum available hard disk space (If no emulation is done on a file, the Threat Prevention **Fail Mode** settings determine if the file is allowed or blocked.
- Maximum available RAM that can be used for Virtual Machines.

If you plan to change the available RAM, these are the recommended settings:

- If the appliance is only used for Threat Emulation, increase the available RAM.
- If the appliance is also used for other Software Blades, decrease the available RAM.

To optimize the system resources for the Threat Emulation appliance

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation > Advanced . The Advanced page opens.
3	Stopping the emulation is determined when the Log storage mechanism automatically deletes log files. Therefore, in order to change the relevant configured value (Note - It also affects the Log's files deletion). Navigate to Logs > Local Storage > . And from When disk space is below <value> Start deleting old files , you can change the <value>.
4	To configure the maximum amount of RAM that is available for emulation, select Limit memory allocation . The default value is 70% of the total RAM on the appliance.

Step	Instructions
5	Optional. To change the amount of available RAM: 1. Click Configure. The Memory Allocation Configuration window opens. 2. Enter the value for the memory limit: ▪ % of total memory - Percentage of the total RAM that Threat Emulation can use. Valid values are between 20 - 90%. ▪ MB - Total MB of RAM that Threat Emulation can use. Valid values are between 512 MB - 1000 GB. 3. Click OK.
6	From When limit is exceeded traffic is accepted with track, select the action if a file is not sent for emulation: ▪ None - No action is done ▪ Log - The action is logged ▪ Alert - An alert is sent to SmartView Monitor
7	Click OK .
8	Install the Threat Prevention Policy.

Managing Images for Emulation

You can define the operating system images that Threat Emulation uses, for each appliance, and for each Threat Emulation profile. If different images are defined for a profile and for an appliance, Threat Emulation uses the images that are selected in both places. An image that is selected only for the appliance or for the profile is not used for emulation.

To manage the images that the appliance uses for emulation

Step	Instructions
1	Double-click the Security Gateway object of the Threat Emulation appliance . The Gateway Properties window opens.
2	From the navigation tree, select Threat Emulation > Advanced . The Advanced page opens.

Step	Instructions
3	From the Image Management section, select the applicable option for your network: ▪ Use all the images that are assigned in the policy - The images that are configured in the Emulation Environment window are used for emulation. ▪ Use specific images - Select one of more images that the Security Gateway can use for emulation.
4	Click OK .
5	Install the Threat Prevention Policy.

Configuring Threat Extraction on the Security Gateway - Autonomous Threat Prevention

To configure the Threat Extraction blade on the Security Gateway

Step	Instructions
1	In the Gateways & Servers view, double-click the Security Gateway object and click the Threat Extraction page.
2	Make sure the Activation Mode is set to Active .
3	In the Resource Allocation section, configure the resource settings.
4	Click OK .
5	Install Policy.

For Threat Extraction API support, open the Security Gateway object, go to **Threat Extraction > Web API > Enable API**.

Threat Extraction and Endpoint Security

When both the Threat Extraction blade and the SandBlast Agent for Browsers are activated on the network Security Gateway, a special configuration is required. Without this configuration, when you download a file, it can be cleaned twice, both by the Threat Extraction blade and by the SandBlast Agent.

To prevent this, the Security Gateway adds a digital signature to all the files cleaned by the Threat Extraction blade. When the SandBlast Agent intercepts a downloaded file. If the digital signature is verified successfully, SandBlast Agent does not clean the file, so the file is not cleaned twice.

For details on how to configure the digital signature on the Security Gateway and how to configure the Endpoint management, see [sk142732](#).

Configuring Threat Extraction in a Cluster

The cluster configuration is similar to Security Gateway configuration, except for specific instructions that are only relevant to cluster.

To configure Threat Extraction in a cluster

Step	Instructions
1	In the Gateways & Servers view, right-click the cluster and click edit.
2	Open the ClusterXL and VRRP page.
3	Select High Availability .

Notes:

- Only the High Availability mode is supported.
- The original files are synchronized between the Cluster Members. In case of a failure, there is still access to the original files.

Threat Extraction Statistics

To see Threat Extraction statistics

Step	Instructions
1	Connect to the command line on the Security Gateway with the Threat Extraction enabled.
2	Run these commands: ▪ <code>cpview</code> ▪ <code>cpstat scrub -f threat_extraction_statistics</code>

Using the Security Gateway CLI

The Security Gateway has a Threat Extraction menu

In this menu, you can:

- Control debug messages
- Get information on queues
- Send the initial email attachments to recipients
- Download updates automatically from the ThreatCloud

To use the Threat Extraction command line

Step	Instructions
1	Connect to the command line on the Security Gateway / each Cluster Member.
2	Log in to the Expert mode.
3	Run: <code>scrub</code>

The menu shows these options:

Option	Description
<code>debug</code>	Controls debug messages.
<code>queues</code>	Shows information on Threat Extraction queues. This command helps you understand the queue status and load on the mail transfer agent (MTA) and the <code>scrubd</code> daemon. The command shows: ▪ Number of pending requests from the MTA to the <code>scrubd</code> daemon ▪ Maximum number pending requests from the MTA to the <code>scrubd</code> daemon ▪ Current number of pending requests from <code>scrubd</code> to <code>scrub_cp_file_convert</code> ▪ Maximum number of pending requests from <code>scrubd</code> to <code>scrub_cp_file_convert</code>
<code>send_orig_email</code>	Sends original email to recipients. To send the original email get: ▪ The reference number - Click on link in the email received by the user. ▪ The email ID - Found in the Logs & Events logs or debug logs.

Option	Description
bypass	Bypasses all files. Use this command to debug issues with the <code>scrubd</code> (Threat Extraction) daemon. When you set bypass to active, requests from the mail transfer agent (MTA) to the scrub daemon are not handled. Threat Extraction is suspended. No files are cleaned.
counters	Shows and resets counters.
update	Manages updates from the download center.
send_orig_file	Sends original file by email.
cache	Shows and resets cache.
backup_expired_mail	Backs up expired mails to external storage.

Storage of Original Files

The Threat Extraction blade reconstructs files (cleans or converts files to PDF) to eliminate potentially malicious content. After the Threat Extraction blade reconstructs the files, the original files are saved on the gateway for a default period.

Mail attachments

Mail attachments are saved for a default period of 14 days.

To configure a different number of days for storage of mail attachments:

Step	Instructions
1	From the left navigation panel, click Gateways & Servers .
2	Open the Security Gateway / Cluster object.
3	From the left tree, click Threat Extraction .
4	Click Resource Allocation > Delete stored original files older than x Days .
5	Change the number of days as required. The maximum is 45 days.

Step	Instructions
6	Click OK .
7	Install the Threat Prevention Policy.

To save the files for a longer period, you must back them up to external storage (see ["Backup to External Storage" below](#)).

Web downloads

Web downloads are saved for a default period of 2 days.

To configure a different number of days for storage of web downloads:

Step	Instructions
1	Connect to the command line on the Security Gateway / each Cluster Member.
2	Log in to the Expert mode.
3	Edit the <code>\$FWDIR/conf/scrub_debug.conf</code> file.
4	Search for <code>http_keep_original_duration</code> and change the value as required. Value can be between 2 and 45 days.
5	Save the changes in the file and exit the editor.

To save the files for a longer period, you must back them up to external storage (see ["Backup to External Storage" below](#)).

Backup to External Storage

When you run out of disk space, you can back e-mail attachments or web downloads to external storage.



Notes:

- In a cluster, you must configure all Cluster Members in the same way.
- End-users cannot access files on external storage. Only the administrator can access these files.

To back up original files to external storage

Step	Instructions
1	Connect to the command line on the Security Gateway / each Cluster Member.

Step	Instructions
2	Log in to the Expert mode.
3	Create the backup folder: <pre>mkdir /mnt/<local_backup_folder></pre> Example: <pre>mkdir /mnt/MyLocalBackupFolder</pre>
4	Mount the backup folder to the remote folder: <pre>mount -t cifs <remote_folder> /mnt/<local_backup_folder></pre> Example: <pre>mount -t cifs //MyServer/MyBackupFolder /mnt/MyLocalBackupFolder</pre>  Best Practice - To preserve the mount configuration after reboot, configure a Scheduled Job to run the applicable "mount" command at startup (in Gaia Portal, go to System Management > Job Scheduler).
5	Edit the <code>\$FWDIR/conf/scrub_debug.conf</code> file: <pre>vi \$FWDIR/conf/scrub_debug.conf</pre>
6	Search for this section: <pre>:external_storage.</pre> 1. Change the <code>enabled</code> value from "0" to "1". 2. In the <code>external_path</code> parameter, write the full path to the local backup folder. 3. The <code>expired_in_days</code> parameter sets the backup date. The value you enter for this parameter specifies how many days before expiration the backup is performed. Example: <pre>:external_storage (:enabled (1) :external_path ("/mnt/MyLocalBackupFolder") :expired_in_days (5)</pre>

Step	Instructions
7	Configure the applicable values: 1. Change the <code>enabled</code> value from "0" to "1". 2. In the <code>external_path</code> parameter, write the full path to the local backup folder. 3. The <code>expired_in_days</code> parameter sets the backup date. The value you enter for this parameter specifies how many days before expiration the backup is performed. Example: <pre>:external_storage (:enabled (1) :external_path ("/mnt/MyLocalBackupFolder") :expired_in_days (5)</pre>
8	Save the changes in the file and exit the editor.

To test the backup manually

Run this command:

```
scrub backup_expired_mail <days for expired entries> <external_path>
```

In "<days for expired entries>" enter "0".

Configuring Zero Phishing Settings in Autonomous Threat Prevention

Zero Phishing is active by default on the Perimeter and Strict profiles.

In-Browser Zero Phishing is off by default in all profiles.

Limitations:

- In-Browser Zero Phishing does not support Internet Explorer.
- In-Browser Zero Phishing does not support mirrored traffic (Mirror port, SPAN port, or TAP mode).

To enable In-Browser Zero Phishing:

1. In SmartConsole, go to **Threat Prevention > Autonomous Policy > Settings > Advanced Settings**.
2. From the drop-down menu, select **In-Browser Zero Phishing**.
3. Change the value to **On**.
4. Click **Apply**.
5. Install the Threat Prevention Policy.

If HTTPS Inspection is active, In-Browser Zero Phishing requires:

- A certificate - HTTPS Inspection automatically generates this certificate.
- Configured FQDN on the Security Gateway / each Cluster Member - In-Browser Zero Phishing runs on the client side (the endpoint). The endpoint must have the possibility to communicate with the Security Gateway / each Cluster Member over HTTPS using an FQDN.

To configure the FQDN in the Security Gateway / Cluster object:

1. Go to the **Zero Phishing** tab.
2. In the FQDN for Zero Phishing section, select one of these options:
 - **Use automatic settings (recommended)** - When you enable Zero Phishing with the automatic settings, a new interface is created in the Security Gateway infrastructure in Gaia, called `tp_dummy` or `tp_dummy_x` (for VSX). This is a dummy interface that is intentionally isolated from external access. This interface has a constant IP address that allows Zero Phishing clients to communicate reliably with the Security Gateway. When automatic settings are used, the client communicates with the Security Gateway using the FQDN: `zero-phishing.iaas.checkpoint.com`.

Automatic configuration resolves private-network accessibility issues that can occur during inspection of HTTP pages. These issues usually occur for users who manually configure an FQDN that resolves to a private IP address.
 - **Gateway FQDN (Fully Qualified Domain Name)** - If you select this option, make sure that the FQDN is in the DNS records of your DNS server.
3. Click **OK**.
4. Install the Access Control and Threat Prevention policies.

**Notes:**

- If HTTPS Inspection is disabled, we recommend enabling it.
- Make sure that the Zero Phishing portal is configured to use a public IP address. For more information, see [sk178769](#).
- To ensure that the configuration was applied successfully, visit this page over both HTTP and HTTPS:

`http://zp-demo.com/verification/zphi_check.html`

`https://zp-demo.com/verification/zphi_check.html`

If the test is successful, this message appears: **In-Browser Zero Phishing feature is working properly.**

Zero Phishing and Unclassified Sites

You can block or allow sites that the Cloud Service is unable to classify as Phishing or Benign.

To block unclassified sites, run this command on the Security Gateway CLI:

```
zph att set inbrowser_block_unclassified_sites 1
```

To allow unclassified sites (default), run this command on the Security Gateway CLI:

```
zph att set inbrowser_block_unclassified_sites 0
```

Zero Phishing Exceptions

To skip unnecessary scans of popular sites, we recommend to configure the Zero Phishing Software Blade to bypass specific popular sites.

To configure the Zero Phishing blade to bypass popular sites:

1. In SmartConsole, go to the **Security Policies** view > **Threat Prevention** > **Exceptions**.
2. Click **Add Exception** > **Below**.
3. Give a name to the rule.
4. In the **Protected Scope** column:
 - a. Click the "Plus" (+) button.
 - b. In the window that opens, go to **Import** > **Updatable Objects**.
 - c. Search for **Zero Phishing Bypass** and select it.
 - d. Click **OK**.
5. In the **Protection/Site/File/Blade** column:

- a. Click the "Plus" (+) button.
 - b. From the drop-down menu in the window that opens, select **Blades**.
 - c. From the list of blades, select **Zero Phishing**.
6. In the **Action** column, select **Inactive**.
7. Install the Threat Prevention Policy.

**Notes:**

- For proper enforcement, make sure that this rule is the last rule under Global Exceptions.
- For any exception rule that contains **Zero Phishing** in the **Protection/Site/File/Blade** column, in the **Install On** column, you must select Security Gateways with Zero Phishing enabled.

The list of bypassed sites changes dynamically. To see the list, go to [sk179726](#).

Zero Phishing enforcement for HTTPS traffic based on SNI

This feature enhances Zero Phishing capabilities when HTTPS Inspection is disabled. It categorizes HTTPS websites based on Server Name Indication (SNI) in TLS handshake to prevent access to phishing websites .

The feature is enabled by default.

You can control the Security Gateway behavior with the kernel parameter `zph_sni_enabled`:

- When `zph_sni_enabled=1`, the feature is enabled (default). The Zero Phishing Software Blade prevents access to phishing websites based on Server Name Indication (SNI) in TLS handshake when HTTPS Inspection is disabled.
- When `zph_sni_enabled=0`, the feature is disabled. The Zero Phishing Software Blade does not prevent access to phishing websites based on Server Name Indication (SNI) in TLS handshake when HTTPS Inspection is disabled.

To configure the applicable value for this kernel parameter temporarily (in the current session only - does not survive reboot), or permanently (survives reboot).



Important - In ClusterXL, you must configure all Cluster Members in the same way.

Deployment	Temporary Configuration	Permanent Configuration
Security Gateway ClusterXL	In Gaia Clish or in the Expert mode, run: <code>fw ctl set int zph_sni_enabled <VALUE></code>	In Gaia Clish or in the Expert mode, run: <code>fw ctl set -f int zph_sni_enabled <VALUE></code>

Deployment	Temporary Configuration	Permanent Configuration
Security Group in ElasticXL Security Group in Maestro Security Group on Scalable Chassis	■ In Gaia Clish, run: fw ctl set int zph_sni_enabled <VALUE> ■ In the Expert mode, run: g_fw ctl set int zph_sni_enabled <VALUE>	■ In Gaia Clish, run: fw ctl set -f int zph_sni_enabled <VALUE> ■ In the Expert mode, run: g_update_conf_file \$FWDIR/modules/fwkernel.conf zph_sni_enabled=<VALUE>

To see the current value of this kernel parameter:

Deployment	Command
Security Gateway ClusterXL	In Gaia Clish, or in the Expert mode, run: fw ctl get int zph_sni_enabled
Security Group in ElasticXL Security Group in Maestro Security Group on Scalable Chassis	■ In Gaia Clish, run: fw ctl get int zph_sni_enabled ■ In the Expert mode: g_fw ctl get int zph_sni_enabled

HTML Smuggling Protection

HTML Smuggling is a stealthy technique that attackers use to deliver malicious files to a victim's device, by exploiting the browser's native capabilities. Instead of downloading files directly from an external server, which can be blocked by traditional security tools, HTML Smuggling embeds the payload inside specially crafted HTML or JavaScript files. When the user opens such a file in their browser, the malicious content is reconstructed locally and saved to the disk, effectively bypassing perimeter defenses like firewalls, proxies, and Security Gateways. This method is particularly dangerous because it can evade detection and facilitate sophisticated attacks, including ransomware or remote access Trojans, without triggering immediate alerts. Check Point's solution proactively detects and prevents HTML Smuggling attacks before they occur.

 **Note** - HTML Smuggling is not inherently malicious. Legitimate services like WhatsApp Web and Telegram Web use similar techniques for secure file sharing and messaging. These platforms use JavaScript in the browser to locally assemble and process files, allowing users to send and receive content without exposing the data to intermediate servers. For example, when a user drags and drops a file into a chat, the browser packages the data locally before securely transmitting it. While this approach improves privacy and performance, it shares technical similarities with attacker methods, making it challenging for traditional security systems to distinguish between legitimate and malicious use cases.

Activating HTML Smuggling Protection

HTML Smuggling Protection is automatically enabled when you enable both of these features:

- In-Browser Zero Phishing
 - In Custom Threat Prevention Policy, In-Browser Zero Phishing is enabled by default when you enable Zero Phishing.
 - In the Autonomous Threat Prevention Policy, go to **Settings > Advanced Settings** > Click the + sign, and from the drop-down menu, select **In-Browser Zero Phishing**. Click **Apply**.
- On the Security Gateway, enable HTTPS Inspection. See ["HTTPS Inspection" on page 363](#).

 **Note** - There is no manual way to enable HTML Smuggling Protection if you do not enable these features.

Disabling the HTML Smuggling Protection

To disable HTML Smuggling Protection:

1. Connect to the Security Gateway through SSH.
2. Change to **Expert** mode.
3. Run this command:

```
zph att set html_smuggling_injection 0
```

4. Verify that HTML Smuggling Protection is disabled:

From a client device, navigate to `https://zp-demo.com/HtmlSmuggling.html`

If HTML Smuggling Protection is disabled, this test site is allowed.

HTML Smuggling Allow List

HTML Smuggling Protection includes a pre-configured allow list for trusted sites, such as WhatsApp Web and Telegram Web.

To add URLs to the pre-configured allow list:

1. Connect to the Security Gateway through SSH.
2. Change to **Expert** mode.
3. Create a file in this location with this exact file name:

```
vi $FWDIR/conf/html_smuggling_white_domains_local.txt
```

4. Add the required URLs to the file.
5. Save the file and exit the editor.

Configuring Advanced Threat Prevention Settings

Threat Prevention Engine Settings - Autonomous Threat Prevention

This section explains how to configure advanced Threat Prevention settings that are in the Engine Settings window, including: inspection engines, the Check Point Online Web Service (ThreatCloud repository), internal email whitelist, file type support for Threat Extraction and Threat Emulation and more.

To get to the Engine Settings window, go to **Manage & Settings > Blades > Threat Prevention > Advanced Settings**.

The **Threat Prevention Engine Settings** window opens.

Fail Mode

Select the behavior of the ThreatSpect engine if it is overloaded or fails during inspection. For example, if the Anti-Bot inspection is terminated in the middle because of an internal failure. By default, in such a situation all traffic is allowed.

- **Allow all connections (Fail-open)** - All connections are allowed in a situation of engine overload or failure (default).
- **Block all connections (Fail-close)** - All connections are blocked in a situation of engine overload or failure.

By default, all Security Gateways that are controlled by a single Security Management Server, act the same according to the fail mode configuration of the Security Management Server.

Starting from R81.20, you can control the fail mode configuration for each individual Security Gateway by using the *malware_config* file.

Valid Values

Value	Description
by_policy	This is the default value. Fail mode is determined by the policy.
open	All connections to the specific Security Gateway are allowed in a situation of engine overload or failure.
close	All connections to the specific Security Gateway are blocked in a situation of engine overload or failure.

To set fail mode on a specific Security Gateway:

1. Connect to the command line on the Security Gateway.
2. Log in to the Expert mode.
3. Backup the current `$FWDIR/conf/malware_config` file:

```
[Expert@HostName]# cp $FWDIR/conf/malware_config
$FWDIR/conf/malware_config_ORIGINAL
```

4. Set the required fail mode for the specific Security Gateway:

To set the fail mode to be controlled by the policy, run:

```
[Expert@HostName]# sed -ie 's/^fail_close=.*$/fail_close=by_
policy/' $FWDIR/conf/malware_config
```

To set the fail mode to "open", run:

```
[Expert@HostName]# sed -ie 's/^fail_close=.*$/fail_close=open/'
$FWDIR/conf/malware_config
```

To set fail mode to "close", run:

```
[Expert@HostName]# sed -ie 's/^fail_close=.*$/fail_close=close/'
$FWDIR/conf/malware_config
```


Check Point Online Web Service

The Check Point Online Web Service is used by the ThreatSpect engine for updated resource categorization. The responses the Security Gateway gets are cached locally to optimize performance. Access to the cloud is required if the response is not cached. Resource classification mode determines if the connection is allowed or suspended while the Security Gateway queries the Check Point Online Web Service.

- Block connections when the web service is unavailable:
 - When selected, connections are blocked when there is no connectivity to the Check Point Online Web Service.
 - When cleared, connections are allowed when there is no connectivity (default).
- Resource categorization mode.

These settings are relevant for Anti-Virus, Anti-Bot and Zero Phishing.

- **Background - connections are allowed until categorization is complete** - When a connection cannot be categorized with a cached response, an uncategorized response is received. The connection is allowed, and in the background, the Check Point Online Web Service continues the categorization procedure. After the classification is complete, a "Detect" log is generated. The log includes this description: "Connection was allowed because background classification mode was set". The response is cached locally for future requests (default). This option reduces latency in the categorization process.
- **Hold - connections are blocked until categorization is complete** - When a connection cannot be categorized with the cached responses, it remains blocked until the Check Point Online Web Service completes categorization.
- **Custom - configure different settings depending on the service** - Lets you set different modes for Anti-Virus, Anti-Bot and Zero Phishing. For example, click **Customize** to set Anti-Bot to Hold mode and Anti-Virus and Zero Phishing to Background mode.

If you change Background mode to Hold mode, the Security Gateway holds the file and does not send it to the client browser. The Browser shows the file as still being downloaded, but the download is stuck at some point. The Security Gateway continues the download only after the scan is complete or if a timeout occurred at the Security Gateway. If the file is malicious, the Security Gateway stops sending the file.

 **Note** - If the "Prevent" action is used in the Threat Prevention policy, then a file that Threat Emulation identified as malware in the past, is blocked. The file will not be sent to the destination even in the "Background" mode.

Connection Unification

Gateway traffic generates a large amount of activity. To make sure that the amount of logs is manageable, by default, logs are consolidated by session. A session is a period that starts when a user first accesses an application or a site. During a session, the gateway records one log for each application or site that a user accesses. All activity that the user does within the session is included in the log. For connections that are allowed or blocked the Anti-Bot, Threat Emulation, and Anti-Virus, the default session is 10 hours (600 minutes).

To adjust the length of a session

Step	Instructions
1	Go to Manage & Settings > Blades > Threat Prevention > Advanced Settings > General > Connection Unification > Session unification timeout (minutes) .
2	Enter the required value.
3	Click OK .

Configuring Anti-Bot Whitelist

The Suspicious Mail engine scans outgoing emails. You can create a list of email addresses or domains whose internal emails are not inspected by Anti-Bot.

To add an email address or domain whose internal emails are not scanned by Anti-Bot

Step	Instructions
1	Go to the Manage & Settings > Blades > Threat Prevention > Advanced Settings > Anti-Bot .
2	Click the + sign.

In this window, you can also edit or remove the entries in the list.

File Type Support for Threat Emulation and Threat Extraction

File Type Support for Threat Emulation and Threat Extraction in Autonomous Threat Prevention is not configured in Engine Settings. To configure file type support settings for Autonomous Threat Prevention, go to **Security Policies > Autonomous Policy > File Protections**.

Optimizing IPS - Autonomous Threat Prevention

IPS is a robust solution that protects your network from threats. Implementation of the recommendations in this chapter helps you maintain optimal security and performance.

During the tuning process, keep in mind that Check Point assesses performance impact and threat severity based on an industry standard mix of network traffic, with greater emphasis on common protocols such as HTTP, DNS, and SMTP. If your network carries significant volumes of other network protocols, you need to take this into account when evaluating the inspection impact on the Security Gateway and the severity of risk posed by potential attacks.

Managing Performance Impact

A Check Point Security Gateway secures your network using multiple inspection functions. During periods of high network traffic load, these security functions may limit the Security Gateway's ability to quickly pass traffic. IPS includes features that balance security needs with maintaining high network performance.

Adaptive IPS

Adaptive IPS allows you to configure your Security Gateway to temporarily disable some or all of the IPS protections during periods of heavy network usage. While IPS inspection usually has minimal impact on connectivity and performance, under heavy load it can become a critical issue. When you enable Adaptive IPS, the Security Gateway may allow traffic to bypass IPS inspection, automatically resuming IPS protections after the Security Gateway's resources return to normal levels.

To enable Adaptive IPS

Step	Instructions
1	In SmartConsole, go to the Gateways & Servers view and double-click the relevant Security Gateway. The Security Gateway object editor opens in the General Properties page.
2	In the left navigation panel, click IPS .

Step	Instructions
3	Go to IPS functionality when the gateway is under heavy load, and select one of these options: ▪ Disable top CPU-consuming protections for [x] hours - Temporarily disables only the IPS protections that consume excessive CPU for the selected number of hours (minimum 1 hour and maximum 24 hours). ▪ Disable all IPS protections until CPU and Memory levels are back to normal - Temporarily disables all IPS protections during high load. After the resources return to acceptable levels, the Security Gateway automatically re-enables all IPS protections. To configure the thresholds for the Security Gateway's CPU and memory usage, click Advanced: ◦ In the High fields, enter the percentage of CPU Usage and Memory Usage that defines heavy load. At these thresholds, the Security Gateway will bypass all IPS protections. ◦ In the Low fields, enter the percentage of CPU Usage and Memory Usage that defines a return from heavy load to normal load. At these thresholds, the Security Gateway will re-enable all IPS protections.  Best Practice - Because all IPS protections are temporarily disabled, use this option only during the initial deployment of Threat Prevention. After you optimize the protections and performance of your Security Gateway, disable this feature to ensure full threat coverage.
4	The Track field controls how bypassed protections are logged: ▪ None - No log is generated for bypassed traffic. ▪ Log - A log entry is created indicating that the Security Gateway allowed traffic to bypass IPS inspection due to heavy load. ▪ Other options (for example: Popup Alert, Mail Alert, SNMP Trap Alert) - Additional notifications or alerts generated when the Security Gateway allows traffic to bypass IPS inspection.
5	Click OK .
6	Install the Threat Prevention Policy.

Configuring Advanced Threat Emulation Settings - Autonomous Threat Prevention

Updating Threat Emulation

Threat Emulation connects to the ThreatCloud to update the engine and the operating system images. The default setting for the Threat Emulation appliance is to automatically update the engine and images.

The default setting is to download the package once a day.

 **Best Practice** - Configure Threat Emulation to download the package when there is low network activity.

Update packages for the Threat Emulation operating system images are usually more than 2GB. The actual size of the update package is related to your configuration.

To enable or disable Automatic Updates for Threat Emulation

In SmartConsole, go to **Security Policies > Threat Prevention > Autonomous Policy > Autonomous Policy Tools**.

Step	Instructions
1	Go to Updates . The Updates page opens.
2	Under Threat Emulation , click Schedule Update .
3	Select or clear these settings: ▪ Enable Threat Emulation engine scheduled update ▪ Enable Threat Emulation images scheduled update
4	To configure the schedule for Threat Emulation engine or image updates, click Configure .

Step	Instructions
5	Configure the automatic update settings to update the database: ■ To update every few hours, select Update every, and configure the number of hours, minutes, and seconds. ■ To update daily, select Update at > Daily and select the hour of update. ■ To update once or more for each week or month: 1. Select At and enter the time of day. 2. Click Days. 3. Click Days of week or Days of month. 4. Select the applicable days.
6	Click OK , and install the Threat Prevention policy.

Updating Threat Emulation Images Manually

Update packages for the Threat Emulation operating system images are usually more than several Gigabytes. The actual size of the update package is related to your configuration.

The default setting is to download the package once a week on Sunday. If Sunday is a work day, we recommend that you change the update setting to a non-work day.

To update the operating system image for Threat Emulation on a gateway

In SmartConsole, go to **Security Policies > Threat Prevention > Autonomous Policy > Autonomous Policy Tools**.

Step	Instructions
1	Go to Updates . The Updates page opens.
2	Under Threat Emulation , click Update Images .
3	Select a gateway. Click OK .
4	Install the Threat Prevention policy.

Fine-Tuning the Threat Emulation Appliance

You can change the advanced settings on the Threat Emulation appliance to fine-tune Threat Emulation for your deployment.

Configuring the Emulation Limits

To prevent too many files that are waiting for emulation, configure these emulation limit settings:

- Maximum file size (up to 100,000 KB)
- Maximum time that the Software Blade does emulation
- Maximum time that a file waits for emulation in the queue (for Threat Emulation appliance only)

If emulation is not done on a file for one of these reasons, the **Fail Mode** settings for Threat Prevention define if a file is allowed or blocked:

- **Allow all connections (Fail-open)** - All connections are allowed in a situation of engine overload or failure (default).
- **Block all connections (Fail-close)** - All connections are blocked in a situation of engine overload or failure.

To configure the emulation limits

Step	Instructions
1	In SmartConsole, go to Manage & Settings > Blades > Threat Prevention > Advanced Settings . The Threat Prevention Engine Settings window opens.
2	Go to Threat Emulation tab > Emulation Limits .
3	Configure the Maximum file size for emulation and the Maximum file time in queue .
4	From When limit is exceeded traffic is accepted with track , select the action if a file is not sent for emulation: ■ None - No action is done ■ Log - The action is logged ■ Alert - An alert is sent to SmartView Monitor
5	Click OK , and then install the policy.

Changing the Size of the Local Cache

When a Threat Emulation analysis finds that a file is clean, the file hash is saved in a cache. Before Threat Emulation sends a new file to emulation, it compares the new file to the cache. If there is a match, it is not necessary to send it for additional emulation. Threat Emulation uses the cache to help optimize network performance. We recommend that you do not change this setting.

To change the size of the local cache

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Threat Prevention > Advanced Settings . The Threat Prevention Engine Settings window opens.
2	Go to the Threat Emulation tab > Advanced Settings .
3	In Number of file hashes to save in local cache , configure the number of file hashes that are stored in the cache.
4	Click OK , and install the policy.

Threat Prevention Scheduled Updates - Autonomous Threat Prevention

Introduction to Scheduled Updates

Check Point wants the customer to be protected. When a protection update is available, Check Point wants the configuration to be automatically enforced on the gateway. You can configure automatic gateway updates for Anti-Virus, Anti-Bot, Threat Emulation and IPS.

For Anti-Virus, Anti-Bot and Threat Emulation, the gateways download the updates directly from the Check Point cloud.

For IPS, prior to R80.20, the updates were downloaded to the Security Management Server, and only after you installed policy, the gateways could enforce the updates. Starting from R80.20, the gateways can directly download the updates. For R80.20 gateways and higher with no internet connectivity, you must still install policy to enforce the updates.

When you configure automatic IPS updates on the gateway, the action for the newly downloaded protections is by default according to the profile settings.

IPS, Anti-Virus and Anti-Bot updates are performed every two hours by default. Threat Emulation engine updates are performed daily at 05:00 by default, and Threat Emulation image updates are performed daily at 04:00 by default.

Configuring Threat Prevention Scheduled Updates

To configure Threat Prevention scheduled updates

In SmartConsole, go to **Security Policies > Threat Prevention > Autonomous Policy > Autonomous Policy Tools**

Step	Instructions
1	Go to Updates .
2	Go to the section about the required Software Blade, click Schedule Update . The Scheduled Updates window opens.
3	Make sure Enable <blade> scheduled updates is selected.
4	For IPS, there are 2 more configuration options for scheduling Security Management Server updates ▪ On successful IPS update on the Security Management Server, install policy on the Security Gateway - automatically installs the policy on the devices you select after the IPS update is completed. Click Configure to select these devices. Note - In pre-R80 gateways, IPS was part of the Access Control policy. Therefore, when you select this option, a message shows which indicates that for pre-R80 gateways, the Access Control policy is installed and for R80 and above gateways, the Threat Prevention policy is installed. ▪ Perform retries on the Security Management Server when the update fails - lets you configure the number of tries the scheduled update makes if it does not complete successfully the first time.
5	Click Configure .
6	In the window that opens, set the Time of event ▪ Update every: set the update frequency by hours OR - ▪ Update at: set the update frequency by days: • Daily - Every day • Days in week - Select days of the week • Days in month - Select dates of the month
7	Click OK .
8	Click Close .
9	Install the Threat Prevention policy.

Checking Update Status

In **Autonomous Policy Tools > Updates**, a message shows which indicates the number of gateways which are up-to-date.

To check if the protections are updated on a specific gateway

Step	Instructions
1	In the Gateways & Servers view, select a gateway.
2	Right-click the gateway, and select the Monitor button. The Device & License Information window opens.
3	The Device Status page shows the gateway status.

Turning Off IPS Automatic Updates on a Gateway

You can turn off automatic IPS updates on a specific gateway.

To turn off automatic IPS updates on a specific gateway

Step	Instructions
1	In SmartConsole, to the Gateways & Servers view, and double-click a gateway. The gateway properties window opens.
2	In the navigation tree, go to IPS .
3	In IPS Update Policy , select Use IPS management updates .
4	Click OK .
5	Install the Threat Prevention Policy.

IPS Updates Use Cases

These scenarios explain how an upgrade of the Security Gateways or the Security Management Server or both, affects the Scheduled Updates configuration.

Scenario 1:

Upgrading the Security Management Server to R80.20, and not upgrading the gateways to R80.20

If you do not upgrade the Security Gateways, then after the upgrade, the Security Gateways are still not able to receive the updates independently, only through the Security Management Server. In this case, the configuration stays the same compared to before the upgrade: Scheduled Updates will be enabled or disabled on the Security Management Server, depending on the configuration before the upgrade.

Scenario 2:

Upgrading the Security Gateways to R80.20 (with or without Security Management Server upgrade)

- If, before the upgrade, Scheduled Updates were configured on the Security Management Server with automatic policy installation, then after the upgrade, automatic IPS updates are still enabled on the Security Management Server, and are also applied to the upgraded gateways.
- If Scheduled Updates were disabled on the Security Management Server before the upgrade, then they remain disabled after the upgrade, both on the Security Management Server and the gateways.
- If, before the upgrade, Scheduled Updates were configured on the Security Management Server without automatic policy installation - then during the first policy installation after upgrade, a message shows which indicates that Security Gateways R80.20 and higher automatically update the IPS Protections. For Security Gateways R80.10 and lower, you must install policy to apply the updates.

SSH Deep Packet Inspection - Autonomous Threat Prevention

You can use the SSH Deep Packet Inspection ("SSH DPI") feature to decrypt and encrypt SSH traffic and let the Threat Prevention solution protect against advanced threats, bots, and other malware.

Key Motivation and Goals for SSH DPI

- Block SSH attacks
- Block the transmission of viruses through SCP and SFTP protocols
- Prevent brute force password cracking of SSH/SFTP servers
- Prevent the dangerous use of SSH Port forwarding
- Prevent using simple passwords like "password" when connecting to SSH/SFTP
- Prevent using vulnerable cryptography
- Prevent using vulnerable SSH clients and servers
- Prevent using port 22 for other protocols except for SSH

Note - Currently, these blades are supported: Anti-Virus, IPS and Threat Emulation.

SSH DPI Architecture

Similar to HTTPS Inspection, SSH DPI works as the man-in-the-middle.

```
SSH_CLIENT <=> Security Gateway <=> SSH_SERVER
```



Note - All TCP traffic should pass through the Security Gateway.

Enabling SSH Deep Packet Inspection on the Security Gateway

Prerequisite

Before enabling SSH DPI, check connectivity to the SSH Server.

To enable SSH DPI

1. On the Security Gateway, Run:

```
cpssh_config ion
```

2. Run this command:

```
fw fetch local
```

Or install the Access Control policy in SmartConsole

Disabling SSH Deep Packet Inspection on the Security Gateway

To disable SSH DPI

On the Security Gateway, run:

```
cpssh_config ioff
```

Viewing SSH DPI Status

To view the status of SSH DPI

On the Security Gateway, run:

```
cpssh_config istatus
```

Note - All ssh inspection settings will be saved after Security Gateway reboot.

Configuring SSH Deep packet Inspection

Add an inspected SSH server

To add a non-transparent inspected SSH sever

Notes:

- The Security Gateway introduces the Server to the Client with a new public key.
- Public key must be in an OpenSSH file format. Example of a public key:

```
ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQVx4hhzpPAR08tM/yCK4qZ52PxU0H/vo
6wM= root@xub24
```

Step	Instructions
1	Copy the SSH server's public key to the Security Gateway Note - In Linux, the key on the Security Gateway is <code>/etc/ssh/ssh_host_rsa_key.pub</code>
2	On the Gateway, run this command: <pre>cpssh_config -s -g SERVER_NAME -e /PATH/TO/RSA/KEY/THAT/YOU/COPIED.pub</pre> For example: If your ssh sever host is <code>my_ssh_server_host.com</code>, and you copy the key to <code>/home/admin/mykey.pub</code>, then you must run this command: <pre>cpssh_config -s -g my_ssh_server_host.com -e /home/admin/mykey.pub</pre>
3	Repeat steps 1 and 2 for every SSH server to be added.

To add a transparent inspected SSH sever

Notes:

- The Security Gateway introduces the Server to the Client with the original public key.
- Public key must be in an OpenSSH file format. Example of a public key:

```
ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQVx4hhzpPAR08tM/yCK4qZ52PxU0H/vo
6wM= root@xub24
```

Step	Instructions
1	Copy the SSH server's public and private key to the Security Gateway. Note - The keys on the Security Gateway are: ■ /etc/ssh/ssh_host_rsa_key.pub ■ /etc/ssh/ssh_host_rsa_key
2	Run this command: <pre>cpssh_config -s -a <SERVER_NAME> -e </PATH/TO/RSA/KEY/THAT/YOU/COPIED>.pub -i </PATH/TO/RSA/PRIVATE_KEY/THAT/YOU/COPIED>.pub</pre> For example: If your ssh sever host is <code>my_ssh_server_host.com</code> and you copy the keys to <code>/home/admin/mykey.pub</code>, then you must run this command: <pre>cpssh_config -s -a my_ssh_server_host.com -e /home/admin/mykey.pub -i /home/admin/mykey</pre>
3	Repeat steps 1 and 2 for every SSH server to be added.

To disable SSH port forwarding

On the Security Gateway, run:

```
cpssh_config -w Global -y Port_fowarding_Enabled -u 0
```

To run SSH DPI on a non-standard port (not TCP port 22)

Step	Instructions
1	In SmartConsole, from the right panel, select Objects > Services .
2	Right-click on the TCP , and then choose NEW TCP .
3	Enter a name for the new TCP service: - Select General > Protocol as SSH2. - Choose Match By > Customize to new port, and then set the port. For example, 22222
4	Install the Access Control Policy.

SSH Deep Packet Inspection Settings

To view all settings

```
cpssh_config -q
```

To view available options for key exchange

On the Security Gateway, run:

```
cpssh_config -w KeyExchange
```

To view available options for cipher

On the Security Gateway, run:

```
cpssh_config -w Cipher
```

To view available options for MAC

On the Security Gateway, run:

```
cpssh_config -w Mac
```

To view available options for Hostkey

On the Security Gateway, run:

```
cpssh_config -w Hostkey
```

To set option

On the Gateway, run:

```
cpssh_config -w Cipher -y <OPTION> -u <VALUE>
```

For example, to disable `aes128-cbc`:

```
cpssh_config -w Cipher -y aes128-cbc -u 0
```

Client Authorization (authorization by keys - without passwords)

To enable client authorization

Step	Instructions
1	Configure the SSH server to do the authorization through keys. This is done by copying the public key from the client to the server in <code>~/.ssh/authorized_keys/</code> . For more details, see askubuntu.com .
2	Copy SSH client public and private keys (<code>mykey.pub</code> and <code>mykey</code>) to the Security Gateway.
3	Copy the SSH server public key (<code>serverkey.pub</code>) to the Security Gateway.
4	Run this command: <pre>cpssh_config -c -a <admin_username>@<my_ssh_server> -e /home/admin/mykey.pub -l /home/admin/serverkey.pub -i /home/admin/mykey</pre> Where: ▪ <code>admin_username</code> is the username on the SSH server ▪ <code>my_ssh_server</code> is the resolvable hostname or IP address of the SSH server ▪ <code>mykey.pub</code> and <code>mykey</code> are pairs of client keys

Cluster

Currently, we do not support keys syncing between cluster nodes automatically.

To manually sync the Cluster Members (after adding/modify/deleting keys)

On the Cluster Member, on which the keys were added, run these commands in the Expert mode:

```
cd $FWDIR/conf
tar -cvvf ssh.tar cpssh
scp cpssh.tar admin@HOST_OF_OTHER_GATEWAY_FROM_THE_CLUSTER:/tmp
```

On the other cluster members, run these commands in the Expert mode:


```
mv /tmp/cpssh.tar $FWDIR/conf
mv cpssh cpssh_backup
tar -xvzf cpssh.tar
killall -s HUP cpsshd
```

Troubleshooting

To make sure that SSH DPI is enabled

Connect to an SSH server with the `telnet` command.

The output should show **"SSH-2.0-cpssh"**

Example:

```
$ telnet 172.23.43.29 22
Trying 172.23.43.29...
Connected to 172.23.43.29.
Escape character is '^]'.
SSH-2.0-cpssh
```

Debugging

To collect Kernel Debug

1. Enable the debug flag "cpsshi" in the kernel debug module "fw".
2. Enable all the debug flags in the kernel debug module "CPSSH".

For instructions on the debugging procedures, see the [R82.10 Security Gateway Guide](#) > Chapter *Kernel Debug on Security Gateway*.

To collect User Space Debug

1. Create and then run this shell script:

```
#!/bin/sh
echo > $FWDIR/log/cpsshd.elg
for PROC in $(pidof cpsshd)
do
    fw debug $PROC on ALL=6
done
tail -f $FWDIR/log/cpsshd.elg
```

To stop the output, press the **CTRL+C** keys.

2. Replicate the issue, or wait for it to occur.

3. Disable the User Space logs with this command:

```
for PROC in $(pidof cpsshd) ; do fw debug $PROC off ALL=6 ;  
done
```

4. Examine the log files:

```
$FWDIR/log/cpsshd.elg*
```

The Check Point ThreatCloud - Autonomous Threat Prevention

Check Point ThreatCloud is a dynamically updated service that is based on an innovative global network of threat sensors and organizations that share threat data and collaborate to fight against modern malware. Customers can send their own threat data to the ThreatCloud and benefit from increased security and protection and enriched threat intelligence. The ThreatCloud distributes attack information, and turns zero-day attacks into known signatures that the Anti-Virus Software Blade can block. The Security Gateway does not collect or send any personal data.

Participation in Check Point information collection is a unique opportunity for Check Point customers to be a part of a strategic community of advanced security research. This research aims to improve coverage, quality, and accuracy of security services and obtain valuable information for organizations.

The ThreatCloud repository contains more than 250 million addresses that were analyzed for bot discovery and more than 2,000 different botnet communication patterns. The ThreatSpect engine uses this information to classify bots and viruses.

For the reputation and signature layers of the ThreatSpect engine, each Security Gateway also has:

- A local database, the Malware database that contains commonly used signatures, URLs, and their related reputations. You can configure automatic or scheduled updates for this database.
- A local cache that gives answers to 99% of URL reputation requests. When the cache does not have an answer, it queries the ThreatCloud repository.
 - For Anti-Virus - the signature is sent for file classification.
 - For Anti-Bot - the host name is sent for reputation classification.

You can access the ThreatCloud repository from ThreatWiki: In a web browser, go to [Check Point ThreatWiki](#).

- In SmartConsole, go to **Security Policies > Threat Prevention > Autonomous Policy >** in the **Autonomous Policy Tools** section, click **ThreatWiki**.

Data which Check Point Collects

When you enable information collection, the Check Point Security Gateway collects and securely submits event IDs, URLs, and external IP addresses to the Check Point Lab regarding potential security risks.

For example

```
<entry engineType="3" sigID="-1" attackName="CheckPoint -
Testing Bot" sourceIP="7alec646fe17e2cd"
destinationIP="d8c8f142" destinationPort="80"
host="www.checkpoint.com"
path="/za/images/threatwiki/pages/TestAntiBotBlade.html"
numOfAttacks="20" />
```

This is an example of an event that was detected by a Check Point Security Gateway. It includes the event ID, URL, and external IP addresses. Note that the data does not contain confidential data or internal resource information. The source IP address is obscured. Information sent to the Check Point Lab is stored in an aggregated form.

Configuring Check Point ThreatCloud on a Gateway

To configure the Security Gateway to share information with the Check Point ThreatCloud

Step	Instructions
1	Double-click the Security Gateway. The gateway window opens and shows the General Properties page.

Step	Instructions
2	Configure the settings for the Anti-Bot and Anti-Virus: 1. From the navigation tree click Anti-Bot and Anti-Virus. The Anti-Bot and Anti-Virus page opens. 2. To configure a Security Gateway to share Anti-Bot and Anti-Virus information with the ThreatCloud, select Support the global community by sharing attack data with Check Point ThreatCloud. - If you do not select this check box, no information is shared with Check Point about the attack. If you select this checkbox, you can select which information is exposed about the attack: ▪ Receive alerts about threats (requires sharing additional end-user data) - all attack information is exposed. ▪ Anonymize collected data (selected by default). Select one of these options: • End-user data (selected by default) - End-user information is anonymized, gateway is exposed. • End-user data and customer identity - both end-user and gateway data are hidden.
3	Configure the settings for IPS: a. From the navigation tree, click IPS. The IPS page opens. b. To configure a Security Gateway to share IPS information with the ThreatCloud, select Help Improve Check Point Threat Prevention product by sending anonymous information about feature usage, infections details and product customizations. Note - To disable sharing IPS information with the Check Point cloud, clear this option.
4	Click OK .

Check Point ThreatCloud Network

Check Point ThreatCloud is a dynamically updated service that is based on an innovative global network of threat sensors and organizations that share threat data and collaborate to fight against modern malware. Customers can send their own threat data to the ThreatCloud and receive protection updates with enriched threat intelligence.

Customers that participate in the ThreatCloud network can use the collected malware data to benefit from increased security and protection. The ThreatCloud can then distribute attack information, and turn zero-day attacks into known signatures that Anti-Virus can block.

When you send files to the ThreatCloud service for emulation, your network gets up-to-date threat information and operating system environments. The connection to the ThreatCloud is enabled by default. This connection gives many management features. We recommend to enable it. If you want to block this connection, you can change the default setting.

To block ThreatCloud

Step	Instructions
1	From the menu bar, click Global Properties .
2	In the navigation tree, go to Data Access Control
3	Clear: Help Check Point Improve the product by sending anonymous information .
4	Publish the SmartConsole session.
5	Restart SmartConsole.
6	Install the Policy.

Autonomous Threat Prevention Overview Section

The **Overview** section in the Autonomous Threat Prevention view provides information about how Autonomous Threat Prevention handles malware attacks.

The **Overview** section shows the number of files which were deleted, inspected, sandboxed and so on, and other information on blocking attacks. To see the logs for each type of action done by Autonomous Threat Prevention, enter these queries in the **Logs & Events** view > **Logs** view or **Logs & Events** > **SmartView** > **Logs** view:

Inspected Files

```
'(blade:"Anti-Virus" AND file_name:*) OR (blade:"Threat Emulation" AND NOT verdict:Error) AND action:(Accept OR Allow OR Block OR Detect OR Drop OR "HTTPS Inspect" OR Inspect OR Prevent OR Reject)'
```

Sandboxed Files

```
'blade:"Threat Emulation" AND NOT verdict:Error AND action:(Accept OR Allow OR Block OR Detect OR Drop OR "HTTPS Inspect" OR Inspect OR Prevent OR Reject)'
```

Sanitized Files

```
'blade:"Threat Extraction" AND action:Extract '
```

Blocked Malicious Files

```
'((blade:"Threat Emulation") OR (blade:"Anti-Virus" AND
"signature") OR (blade:IPS AND ("Adobe Reader Violation" OR
"Content Protection Violation" OR "Instant Messenger" OR "Adobe
Flash Protection Violation")))) AND action:(Block OR Drop OR
Prevent) '
```

Detected Malicious Files

```
'(blade:"Anti-Virus" AND file_name:*) OR (blade:"Threat Emulation"
AND NOT verdict:Error) AND action:Detect '
```

Blocked Attempts To Access Malicious Sites

```
'NOT SMTP AND action:(Block OR Drop OR Prevent) and ((blade:IPS
AND ("Adobe Flash Protection Violation" OR "Adobe Shockwave
Protection Violation" OR "Web Client Enforcement Violation" OR
"Exploit Kit")) OR (blade:"Anti-Virus" AND ("URL Reputation" OR
"DNS Reputation"))) '
```

Detected Phishing Attempts

```
'blade:"Zero Phishing" AND action:(Detect) '
```

Blocked Phishing Attempts

```
'blade:"Zero Phishing" AND action:(Prevent) '
```

Blocked Targeted Host Attacks

```
'blade:IPS AND action:(Block OR Drop OR Prevent) NOT ("SMTP" OR
"Adobe Reader Violation" OR "Content Protection Violation" OR
"Mail Content Protection Violation" OR "SMTP Protection Violation"
OR "Phishing Enforcement Protection" OR "Adobe Flash Protection
Violation" OR "Adobe Reader Violation" OR "Content Protection
Violation" OR "Instant Messenger" OR "Adobe Flash Protection
Violation" OR "Scanner Enforcement Violation" OR "Port Scan" OR
"Novell NMAP Protocol Violation" OR "Adobe Flash Protection
Violation" OR "Adobe Shockwave Protection Violation" OR "Web
Client Enforcement Violation" OR "Exploit Kit")'
```

Monitoring Threat Prevention - Autonomous Threat Prevention

Networks today are more exposed to cyber-threats than ever. This creates a challenge for organizations in understanding the security threats and assessing damage. SmartConsole helps the security administrator find the cause of cyber-threats, and remediate the network.

The **Logs & Events > Logs** view presents the threats as logs.

The other views in the **Logs & Events** view combine logs into meaningful security events. For example, malicious activity that occurred on a host in the network in a selected time interval (the last hour, day, week or month). They also show pre- and post-infections statistics.

You can create rich and customizable views and reports for log and event monitoring, which inform key stakeholders about security activities. For each log or event, you can see a lot of useful information from the ThreatWiki and IPS Advisories about the malware, the virus or the attack.

Log Sessions

Gateway traffic generates a large amount of activity. To make sure that the amount of logs is manageable, by default, logs are consolidated by session. A session is a period that starts when a user first accesses an application or site. During a session, the gateway records one log for each application or site that a user accesses. All activity that the user does within the session is included in the log.

To see the number of connections made during a session, see the **Suppressed Logs** field of the log in the **Logs & Events** view.


Session duration for all connections that are prevented or detected in the Rule Base is, by default, 10 hours. You can change this in the **Manage & Settings** view in SmartConsole > **Blades > Threat Prevention > Advanced Settings > General > Connection Unification**.

Using the Log View

In SmartConsole

Step	Instructions
1	Go to Logs and Monitoring > View .
2	Click New , and then select New View .
3	In the New View window, enter: ■ Name ■ Category - For example, select Access Control ■ Description - (optional)
4	In the new window that opens, create a query. Click Options > View Filter and select Blade and App control .
5	To customize how you see the data that comes back from the query, click Add Widget . Start with a Timeline of all events. In Table , you can create a table that contains multiple field such as user, application name, and the amount of traffic. Additional widgets for use: map, infographic, rich text, chart, and container (for multiple widgets). After you save the changes in SmartConsole, you can schedule and get an automatic email at multiple intervals.

This is an example of the Log view:

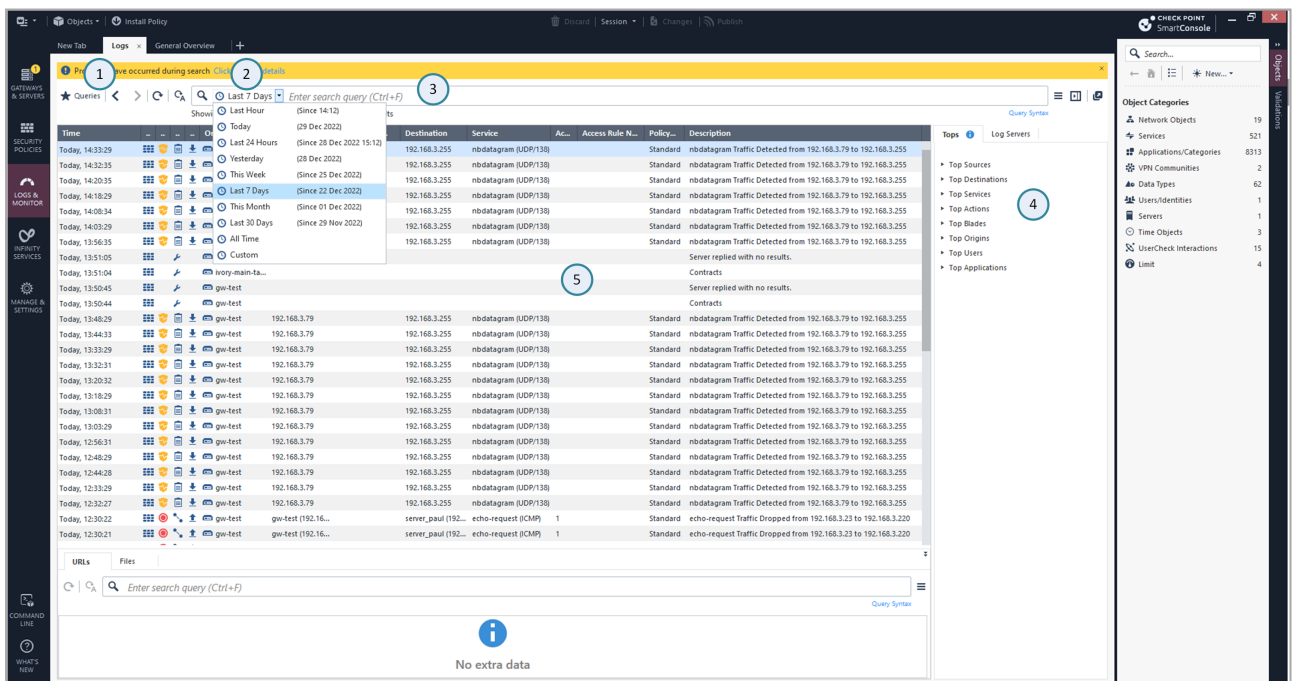

Item	Description
1	Queries - Predefined and favorite search queries.
2	Time Period - Search with predefined custom time periods.
3	Query search bar - Define custom queries in this field. You can use the GUI tools or manually enter query criteria. Shows the query definition for the most recent query.
4	Log statistics pane - Shows top results of the most recent query.
5	Results pane - Shows log entries for the most recent query.

Predefined Queries

The **Logs & Events Logs** tab provide a set of predefined queries, which are appropriate for many scenarios.

Queries are organized by combinations of event properties.

Example

- **Threat Prevention > by Blades.**
- **More >** such as by **UA Server** or **UA WebAccess**.
- **Anti-Spam & Email Security Blade >** such as by **Blocklist Anti-Spam**, or **IP Reputation Anti-Spam**.

Creating Custom Queries

Queries can include one or more criteria. You can modify an existing predefined query or create a new one in the query box.

To modify a predefined query:

Click inside the query box to add search filters.

To save the new query in the Favorites list

Step	Instructions
1	Click Queries > Add to Favorites . The Add to Favorites window opens.
2	Enter a name for the query.

Step	Instructions
3	Select or create a new folder to store the query.
4	Click Add .

Selecting Criteria from Grid Columns

You can use the column headings in the **Grid** view to select query criteria. This option is not available in the **Table** view.

To select query criteria from grid columns

Step	Instructions
1	In the Results pane, right-click on a column heading.
2	Select Add Filter .
3	Select or enter the filter criteria. The criteria show in the Query search bar and the query runs automatically.

To enter more criteria, use this procedure or other procedures.

Manually Entering Query Criteria

You can enter query criteria directly in the **Query search bar**. You can manually create a new query or make changes to an existing query that shows in the **Query search bar**.

As you enter text, the **Search** shows recently used query criteria or full queries. To use these search suggestions, select them from the drop-down list.

Selecting Query Fields

You can enter query criteria directly from the Query search bar.

To select field criteria

Step	Instructions
1	If you start a new query, click Clear  to remove query definitions.
2	Put the cursor in the Query search bar.
3	Select a criterion from the drop-down list, or enter the criteria in the Query search bar.

Packet Capture

You can capture network traffic. The content of the packet capture provides a greater insight into the traffic which generated the log. With this feature activated, the Security Gateway sends a packet capture file with the log to the Log Server. You can open the file, or save it to a file location to retrieve the information at a later time.

To see a packet capture

Step	Instructions
1	In SmartConsole, go to the Logs & Events view.
2	Open the log.
3	Click the link in the Packet Capture field. The Packet Capture opens in a program associated with the file type.
4	Optional: Click Save to save the packet capture data on your computer.

For further technical information on packet capture, see [sk184132 - Threat Prevention Packet Capture - Performance Impact and Considerations](#).

Advanced Forensics Details

Some logs contain additional fields which can be found in the Advanced Forensics Details section in the log. These protocols are supported: DNS, FTP, SMTP, HTTP, and HTTPS. The additional information is used by the Check Point researchers to analyze attacks. The advanced forensics details also show in the gateway statistics files which are sent to the Check Point cloud.

The Advanced Forensics Details do not show if the connection closes before this information is saved. This depends on the traffic and configuration of the Software Blades.

The Advanced Forensics Details do not show if the connection closes before this information is saved. This depends on the traffic and configuration of the Software Blades.

Example

- When the gateway finds the connection is malicious before the additional details are saved.
- When Threat Emulation or Anti-Virus are in Rapid Delivery mode, and file is downloaded and the connection closes before the examination of the file is complete. In such case, the Forensics details may not show.

Threat Analysis in the Logs & Events View

The **Logs & Events** view supplies advanced analysis tools with filtering, charts, reporting, statistics, and more, of all events that travel through enabled Security Gateways.

You can filter the Threat Prevention Software Blade information for fast monitoring and useful reporting on connection incidents related to them.

Available options

- Real-time and historical graphs and reports of threat incidents
- Graphical incident timelines for fast data retrieval
- Easily configured custom views to quickly view specified queries
- Incident management workflow
- Reports to data owners on a scheduled basis


Views

Views window tells administrators and other stakeholders about security and network events. A **View** window is an interactive dashboard made up of widgets. Each widget is the output of a query. A **Widget** pane can show information in different formats, for example, a chart or a table.

SmartConsole comes with several predefined views. You can create new views that match your needs, or you can customize an existing view. Views are accurate to the time they were generated or refreshed.

In the **Logs & Events** view, clicking the (+) tab opens a catalog of all views and reports, predefined and customized. To open a view, double-click the view or select the applicable view and click **Open** from the action bar.

Example View window

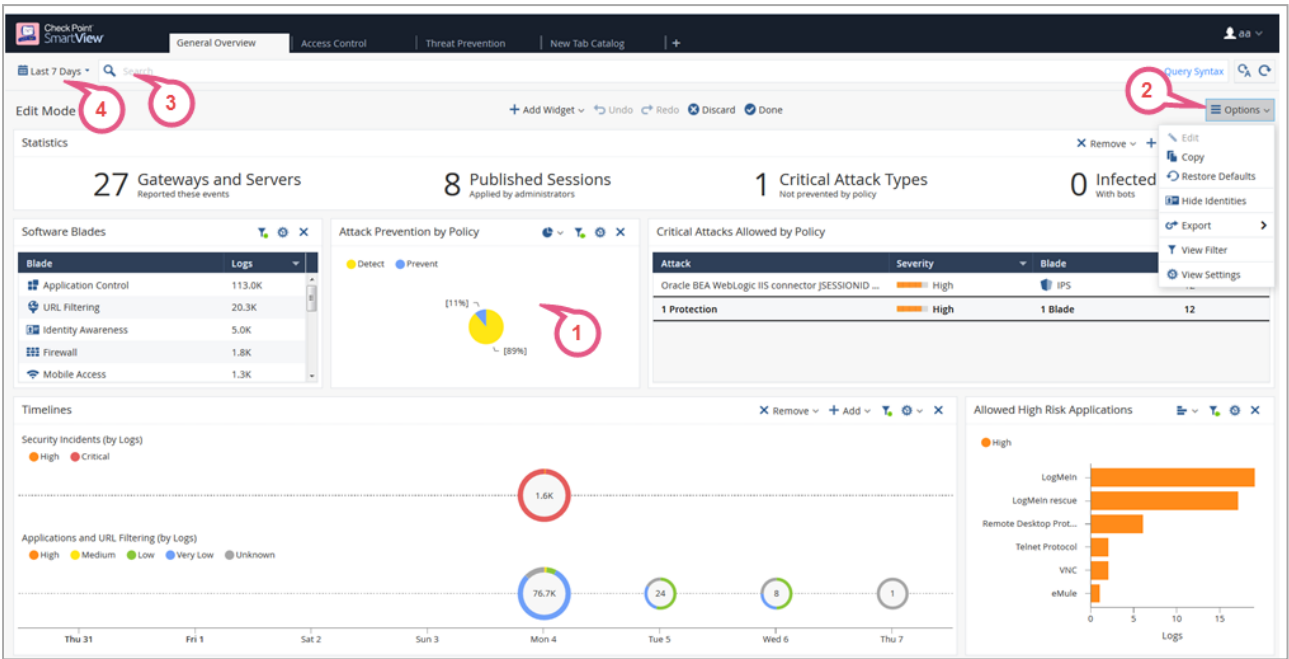

Item	Description
1	Widget - The output of a query. A Widget can show information in different formats, for example, a chart or a table. To find out more about the events, you can double-click most widgets to drill down to a more specific view or raw log files.
2	Options - Customize the view, restore defaults, Hide Identities, export.
3	Query search bar - Define custom queries using the GUI tools, or manually entering query criteria. Shows the query definition for the most recent query.
4	Time Period - Specify the time periods for the view.

For more information on using and customizing reports, see the [R82.10 Logging and Monitoring Administration Guide](#).

Reports

A report consists of multiple views and a cover page. There are several predefined reports, and you can create new reports. A report gives more details than a view. Reports can be customized, filtered, generated and scheduled. You cannot drill down into a report.

Click the (+) tab to open a catalog of all views and reports, predefined and customized. To open a report, double-click the report or select the applicable report and click **Open**.

For more information on using and customizing reports, see the [R82.10 Logging and Monitoring Administration Guide](#)

Log Fields

See ["Log Fields" on page 504](#).

How to Investigate Threat Prevention Events

- ["Cyber Attack View - Gateway" on page 441](#)
- ["MITRE ATT&CK" on page 498](#)

Troubleshooting - Autonomous Threat Prevention

Troubleshooting the Threat Extraction Blade

This section covers common problems and solutions.

The Threat Extraction blade fails to extract threats from emails belonging to LDAP users

In **Global Properties > User Directory**, make sure that you have selected the **Use User Directory for Security Gateways** option.

Users stopped receiving emails

Step	Instructions
1	On the gateway command line interface, run: <pre>scrub queues</pre> If the queues are flooded with requests, the Threat Extraction load is too high for the Security Gateway. a. Bypass the scrub daemon. Run: <pre>scrub bypass on</pre> b. Ask affected users if they are now receiving their emails. If they are, reactivate Threat Extraction. To reactivate the scrub daemon, run: <pre>scrub bypass off</pre>

Step	Instructions
2	Make sure the queue is not full. - Run: <pre> /opt/postfix/usr/sbin/postqueue -c /opt/postfix/etc/postfix/ -p </pre> - If the queue is full, empty the queue. Run: <pre> /opt/postfix/usr/sbin/postsuper -c /opt/postfix/etc/postfix/ -d ALL </pre>  Important - When empty the queue, you lose the emails. - To prevent losing important emails, flush the queue. Flushing forcefully resends queued emails. Run: <pre> /opt/postfix/usr/sbin/postfix -c /opt/postfix/etc/postfix/ flush </pre>
3	If queues remain full, make sure that the MTA is not overloading the Security Gateway with internal requests. The MTA should be scanning only emails from outside of the organization.

Users have no access to original attachments

Make sure users are able to access the UserCheck Portal from the e-mail they get when an attachment is cleaned.

Step	Instructions
1	Click the link sent to users.
2	Make sure that the UserCheck Portal opens correctly.
3	If users are not able to access the UserCheck Portal but see the Gaia portal instead, make sure that accessibility to the UserCheck Portal is correctly configured. - In SmartConsole, open Gateway Properties > UserCheck. - Under Accessibility, click Edit. - Make sure the correct option is selected according to the topology of the Security Gateway.

Step	Instructions
4	Open CPView . Make sure the "access to original attachments" statistic is no longer zero.

Attachments are not scanned by Threat Extraction

The `scanned attachment` statistic in CPView fails to increment.

On the Security Gateway:

Step	Instructions
1	Make sure that the disk or directories on the Security Gateway are not full. a. Run: <code>df -h /</code> b. Run: <code>df -h /var/log</code>
2	Make sure directories used by Threat Extraction can be written to. Run: a. <code>touch /tmp/scrub/test</code> b. <code>touch /var/log/jail/tmp/scrub/test</code> c. <code>touch \$FWDIR/tmp/email_tmp/test</code>

CPView shows Threat Extraction errors

In CPView, on the `Software-blades > Threat-extraction > File statistics` page, the number for "internal errors" is high compared to the total number of emails.

If the ThreatSpect engine is overloaded or fails while inspecting an attachment, a log is generated. By default, attachments responsible for log errors are still sent to email recipients. To prevent these attachments being sent, set the engine's fail-over mode to **Block all connections**.

Step	Instructions
1	Go to Manage & Settings > Blades > Threat Prevention > Advanced Settings .
2	In the Fail Mode section, select Block all connections (fail-close) .

Troubleshooting IPS for a Security Gateway

IPS includes the ability to temporarily stop protections on a Security Gateway set to Prevent from blocking traffic. This is useful when troubleshooting an issue with network traffic.

To enable Detect-Only for Troubleshooting

Step	Instructions
1	In SmartConsole, click Gateways & Servers and double-click the Security Gateway
2	From the left tree, click IPS .
3	In the Activation Mode section, click Detect Only .
4	Click OK .
5	Install the Access Control policy. All protections set to Prevent allow traffic to pass, but continue to track threats according to the Track setting.

Common Features in Custom Threat Prevention and Autonomous Threat Prevention

The sections in this chapter describe features that apply in the same way to Custom Threat Prevention and Autonomous Threat Prevention.

Using Anti-Spam and Mail

Introduction to Anti-Spam and Mail Security

The relentless and unprecedented growth in unwanted email now poses an unexpected security threat to the network. As the amount of resources (disk space, network bandwidth, CPU) devoted to handling unsolicited emails increases from year to year, employees waste more and more time sorting through unsolicited bulk email commonly known as spam. Anti-Spam and Mail provides network administrators with an easy and central way to eliminate most of the spam reaching their networks.

Anti-Spam and Mail Features

Feature	Explanation
Content based Anti-Spam	The core of the Anti-Spam functionality is the content based classification engine.
IP Reputation Anti-Spam	Using an IP reputation service, most of the incoming spam is blocked at connect time.
Block List Anti-Spam	Block specific senders based on IP address or sender's address.
Mail Anti-Virus	Scan and filter mail for malware.
Zero Hour Malware Protection	Filter mail using rapid response signatures.
IPS	Intrusion prevention system for mail protection.

Mail Security Overview

On the Anti-Spam & Mail tab

- Select gateways that enforce Anti-Virus checking
- Select gateways that enforce Anti-Spam protection
- Enable automatic updates
- View settings and logs

Anti-Spam

The Anti-Spam functionality employs unique licensed technology. Unlike many Anti-Spam applications that rely on searching for keywords and a lexical analysis of the content of an email message, Check Point Anti-Spam identifies spam by analyzing known and emerging distribution patterns. By avoiding a search for key words and phrases that might classify a legitimate email as spam and instead focusing on other message characteristics, this solution offers a high spam detection rate with a low number of false positives.

To preserve personal privacy and business confidentiality, only select characteristics are extracted from the message envelope, headers, and body (no reference to actual content or attachments are included). Hashed values of these message characteristics are sent to a Detection Center for pattern analysis. The Detection Center identifies spam outbreaks in any language, message format, or encoding type. Responses are returned to the enterprise gateway within 300 milliseconds.

Once identified, the network of spam generating machines is blacklisted. If the network changes its behavior, it is removed from the black list.

Adaptive Continuous Download

To prevent delays, *Adaptive Continuous Download* starts delivering the email to the recipient while Anti-Spam scanning is still in progress. If the email is designated as Spam, it is flagged as spam before it is completely transferred to the recipient. Both the SMTP and POP3 protocols support Adaptive Continuous Download for the entire email message.

Configuring Anti-Spam

Configuring a Content Anti-Spam Policy

To configure a content Anti-Spam policy

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard . SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	On the Overview page, under Content based Anti-Spam , click Settings .
3	Use the slider to select an Anti-Spam policy protection level.
4	Select flagging options.
5	In the Security Gateway Engine settings section, set a maximum data size to scan.

Step	Instructions
6	Select Tracking Options for Spam, Suspected Spam, or Non Spam. Tracking options include ▪ None (no logging) ▪ Log ▪ Popup Alert ▪ Mail Alert ▪ SNMP Trap Alert ▪ User Defined Alert
7	Click Save , and then close SmartDashboard.
8	In SmartConsole, install the Access Control policy.

Configuring an IP Reputation Policy

This window enables IP reputation, an Anti-Spam mechanism that checks the IP address of the message sender (contained in the opening SYN packet) against a dynamic database of suspect IP addresses. If, according to the IP reputation service, the originating network has a reputation for sending spam, then the spam session is blocked at connect time. This way, the IP reputation feature creates a list of trusted email sources.

To configure an IP reputation policy

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard. SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	On the Overview page, under IP Reputation Anti-Spam , click Settings .
3	Use the slider to select an IP Reputation Policy ▪ Off - IP Reputation service is disabled ▪ Monitor only - Monitors known and suspected spam but does not block it ▪ Medium Protection - Blocks known spam and monitors suspected spam ▪ High Protections - Blocks known and suspected spam

Step	Instructions
4	Select tracking options for Spam, Suspected Spam, or Non spam. Tracking options include ▪ None (no logging) ▪ Log ▪ Popup Alert ▪ Mail Alert ▪ SNMP trap alert ▪ User Defined Alert
5	Click Save , and then close SmartDashboard.
6	In SmartConsole, install the Access Control policy.

Configuring a Block List

You can configure a list of email sources to block according to the sender's name, domain name, or IP address.

To configure a block list

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard. SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	On the Overview page, under Block List Anti-Spam , click Settings .
3	Use the slider to select a Block Policy: ▪ Off - Not blocked ▪ Monitor Only - Not Blocked, but monitors senders by IP address and email address ▪ Block - Blocks senders by IP address and email address
4	In the Blocked senders\domains section, click Add and enter the name of a sender or domain to be rejected.
5	In the Blocked IPs section, click Add and enter an IP address that should be blocked.
6	From the drop-down list in the Tracking section, select a tracking option for blocked mail or non-spam.

Step	Instructions
7	Click Save , and then close SmartDashboard.
8	In SmartConsole, install the Access Control policy.

Configuring Anti-Spam SMTP

SMTP traffic can be scanned according to direction or IP addresses.

To configure Anti-Spam SMTP

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard . SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	From the navigation tree, click Advanced > SMTP .
3	Make sure that Scan SMTP traffic with Anti-Spam engine for Anti-Spam, IP reputation and Block list protection is selected.
4	Select to scan SMTP traffic By Mail Direction or By IPs . a. If you selected scan By IPs, click Add Rule to configure rules for IP addresses to scan. b. If you selected scan By Mail Direction, select a scanning direction for: ■ Incoming files ■ Outgoing files ■ Internal files through the gateway
5	Select Activate Continuous Download to avoid client time-outs when large files are scanned. (See "Adaptive Continuous Download" on page 353 for further information).
6	Click Save , and then close SmartDashboard.
7	In SmartConsole, install the Access Control policy.

Configuring Anti-Spam POP3

POP3 traffic can be scanned according to direction

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard. SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	From the navigation tree, click Advanced > POP3 .
3	Make sure that Scan POP3 traffic with Anti-Spam engine for Anti-Spam, IP reputation and Block list protection is selected.
4	Select to scan POP3 traffic By Mail Direction or By IPs .
5	If you selected scan By IPs , click Add Rule to configure rules for IP addresses to scan.
6	If you selected scan By Mail Direction , select a scanning direction for: ■ Incoming mail ■ Outgoing mail ■ Internal mail
7	Select Activate Continuous Download to avoid client time-outs when large files are scanned. (See "Adaptive Continuous Download" on page 353 for further information).
8	Click Save , and then close SmartDashboard.
9	In SmartConsole, install the Access Control policy.

Configuring Network Exceptions

An Anti-Spam policy can be enforced on all email traffic or only on traffic that was not deliberately excluded from the policy.

To exclude sources and destinations

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard. SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	From the navigation tree click Advanced > Network Exceptions .

Step	Instructions
3	Select Enforce the Anti-Spam policy on all traffic except for traffic between the following sources and destinations .
4	Click Add . The Network Exception window opens.
5	For Source and Destination , select Any , or select Specific and one gateway from each list.
6	Click OK .
7	Click Save , and then close SmartDashboard.
	In SmartConsole, install the Access Control policy.

Configuring an Allow List

You can configure a list of allowed email sources according to the sender's name and name, or according to the IP address.

To configure an allow list

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard . SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	From the navigation tree click Advanced > Allow List .
3	In the Allowed Senders / Domains section, click Add and enter the name of a sender or domain to be allowed.
4	In the Allowed IPs section, click Add and enter an allowed IP address.
5	From the drop-down list in the Tracking section, select a tracking option.
6	Click Save , and then close SmartDashboard.
7	In SmartConsole, install the Access Control policy.

Selecting a Customized Server

You can select an alternative Detection Center for Anti-Spam analysis.

To select a Detection Center

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard . SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	From the navigation tree click Advanced > Customized Server .
3	Select Use Customized Server .
4	From the drop-down list, select a server.
5	Click Save , and then close SmartDashboard.
6	In SmartConsole, install the Access Control policy.

Bridge Mode and Anti-Spam

If an UTM-1 appliance is configured to run in bridge mode, Anti-Spam is supported providing that:

- The bridge interface has an IP address
- The bridge interface has a default gateway

Configuring a Disclaimer

You can create your own custom disclaimer notice.

To configure a disclaimer

Step	Instructions
1	In SmartConsole, select Manage & Settings > Blades > Anti-Spam & Mail > and click Configure in SmartDashboard . SmartDashboard opens and shows the Anti-Spam & Mail tab.
2	From the navigation tree, select Advanced > Disclaimer .
3	Select Add disclaimer to email scanned by Anti-Virus and Anti-Spam engines .
4	In the text box, type your disclaimer notice.
5	Click Save , and then close SmartDashboard.
6	In SmartConsole, install the Access Control policy.

Anti-Spam Logging and Monitoring

Anti-Spam logging and monitoring options are available in the **Logs & Events** view in SmartConsole.

Logs derived from Anti-Spam scanning are sent to Security Management Server, and show in the **Logs & Events > Logs** view. In the **Logs & Events** view, you can see detailed views and reports of the Anti-Spam activity, customize these views and reports, or generate new ones (see ["Threat Analysis in the Logs & Events View" on page 259](#)).

Threat Prevention API

What is the Threat Prevention Web API?

The Security Gateways inspect files intercepted from traffic. With the Threat Prevention API, you can upload files which were intercepted by traffic for inspection by the Security Gateways.

For example: The organizational Human Resources portal receives CVs from external users. When the files are sent directly to the Security Gateway, the Threat Emulation process can take a few minutes, during which the user must wait for a message that the file was uploaded. To improve user experience and prevent the wait, you can keep these files in a separate container, let the user know that the files were uploaded, and only then use the API to send the files for inspection by the Security Gateway.

There are two types of Threat Prevention APIs:

- **Cloud API** - Used for:
 - Accessing the Security Gateway - Supports Anti-Virus and Threat Emulation. For more details, see the [Threat Prevention API Reference Guide](#).
 - Directly accessing ThreatCloud - Supports Threat Extraction, Anti-Virus and Threat Emulation. For more details, see the [Threat Prevention API Reference](#)
- **Local API on the Security Gateway** - Supports Threat Extraction, Anti-Virus and Threat Emulation. For more details, see ["Using the Local Threat Extraction Web API" below](#) and [sk137032](#).

Using the Local Threat Extraction Web API

To use the Threat Extraction API, you need to create an API key. After you create the API key, you can use it to connect to the gateway and send files for extraction.

To create the Threat Extraction Web API key

Step	Instructions
1	In SmartConsole, double-click the Security Gateway.
2	From the navigation tree, select Threat Extraction .
3	Select Enable API .
4	Install Policy.

The Web API key is created.

After the Web API key is created, you can deploy it to the clients.

To find the Web API key

Step	Instructions
1	Open the CLI.
2	Edit this file: <code>vi /opt/CPUserCheckPortal/phpincs/conf/TPAPI.ini</code>
3	The API key is in the <code>api_key</code> field. Note - You can change the <code>api_key</code> in the <code>TPAPI.ini</code> file. Changes are effective immediately.

For more information, see [sk113599](#).

HTTPS Inspection

HTTPS Internet traffic uses the TLS (Transport Layer Security) protocol and is encrypted to give data privacy and integrity. However, HTTPS traffic has a possible security risk and can hide illegal user activity and malicious traffic. The enabled Software Blades on the Security Gateway cannot inspect HTTPS traffic because it is encrypted. HTTPS Inspection lets the Security Gateway intercept TLS connections and decrypt their traffic for inspection by the enabled Software Blades.

There are two modes of HTTPS Inspection:

- **Outbound HTTPS Inspection** - To protect against malicious traffic that is sent from an internal client to an external site or server.
- **Inbound HTTPS Inspection** - To protect internal servers from malicious requests that arrive from the Internet or an external network.

The Security Gateway uses certificates and becomes an intermediary between the client computer and the secure web site. All data is kept private in HTTPS Inspection logs. Only administrators with HTTPS Inspection permissions can see all the fields in such logs.

For information on what's new in HTTPS Inspection starting from R80.20, see [sk163594](#).

Limitations

- CRL validation is not supported in pure IPv6 environments (when IPv4 addresses are not configured on the Security Gateway's interfaces).
- In the HTTPS Inspection policy, when selecting the same action that already appears in the **Action** column, the Security Management Server records it as a change within the SmartConsole session.
- The Security Gateways supports HTTP/3 inspection only when it runs in the User Space Firewall (USFW) mode, which is the default in versions R82 and higher.

The Security Gateway downgrades HTTP/3 traffic to an earlier HTTP version when it operates in the kernel mode firewall.

For information about the User Space Firewall (USFW) mode, see the Release Notes for your version and [sk167052](#).

- The Security Gateway drops HTTP/3 traffic when the Threat Prevention "Deep Inspection" mode is enabled.
- Chromium-based web browsers allow HTTP/3 traffic only if the HTTPS Inspection certificate is signed by a trusted CA from the Chromium trust list.

Chromium-based web browsers do not allow adding certificates for HTTP/3 traffic to the browser's trusted store. See [sk111754](#).

- Inspection of QUIC traffic over a proxy is not supported.

- Protocols that rely on QUIC, except HTTP/3, will be downgraded to an earlier HTTP version.

Intercepting HTTPS Connections

Outbound HTTPS Inspection

Outbound connections are HTTPS connections that arrive from an internal client to an external server.

Outbound connection flow

1. An HTTPS request (from an internal client to an external server) arrives at the Security Gateway.
2. The Security Gateway intercepts the HTTPS request.
3. The Security Gateway determines whether the HTTPS request matches an existing HTTPS Inspection rule:
 - If the HTTPS request does **not** match a rule, the Security Gateway does not intercept the HTTPS connection.

In this case, HTTPS Inspection is bypassed.
 - If the HTTPS request matches a rule, the Security Gateway intercepts the HTTPS connection and continues to the next step.
4. The Security Gateway validates the certificate of the external server.

By default, the Security Gateway uses the Online Certificate Status Protocol (OCSP) to check for certificate revocation.

If the certificate does not support OCSP, the Security Gateway uses the Certificate Revocation List (CRL) to check for certificate revocation.
5. The Security Gateway creates a new certificate for the connection to the external server.
6. The Security Gateway decrypts HTTPS traffic.
7. The Security Gateway calls the enabled Software Blades to inspect the decrypted HTTPS traffic.
8. If the Security Policy allows this traffic, the Security Gateway encrypts the HTTP connection.
9. The Security Gateway sends the HTTPS request to the external server.

Inbound HTTPS Inspection

Inbound connections are HTTPS connections that arrive from an external client and connect to a server in the DMZ or the internal network.

Inbound connection flow

1. An HTTPS request (from an external client to an internal server) arrives at the Security Gateway.

 **Note** - By design, the Security Gateway/Cluster is intentionally configured not to perform HTTPS Inspection on traffic directed towards it. To change this behavior, follow [sk114574](#).

2. The Security Gateway intercepts the HTTPS request.
3. The Security Gateway determines whether the HTTPS request matches an existing HTTPS Inspection rule:
 - If the HTTPS request does **not** match a rule, the Security Gateway does not intercept the HTTPS connection.

In this case, the HTTPS Inspection is bypassed.
 - If the HTTPS request matches a rule, the Security Gateway intercepts the HTTPS connection and continues to the next step.
4. The Security Gateway uses the certificate for the internal server to create an HTTPS connection with the external client.
5. The Security Gateway creates a new HTTPS connection with the internal server.
6. The Security Gateway decrypts the HTTPS traffic.
7. The Security Gateway calls the enabled Software Blades to inspect the decrypted HTTPS traffic.
8. If the Security Policy allows this traffic, the Security Gateway encrypts the HTTP connection.
9. The Security Gateway sends the HTTPS request to the internal server.

Getting Started with HTTPS Inspection

This section shows an example of how to configure a Security Gateway to intercept outbound and inbound HTTPS traffic.

Step	Instructions
1	Enable the relevant Software Blades on the Security Gateway. You must enable HTTPS Inspection on the Security Gateway for the enabled Software Blades to inspect the decrypted HTTPS traffic.
2	Configure the applicable HTTPS Inspection Policy - Inbound and Outbound. See "HTTPS Inspection Policy" on the next page
3	Configure the Security Gateway to use inbound certificates. See "Working with Inbound CA Certificates" on page 371 .
4	Configure HTTPS Inspection on the Security Gateway: - Configure the Security Gateway to use outbound certificates and deploy the certificates in your organization. See "Working with Outbound CA Certificates" on page 376 - Enable HTTPS Inspection on the Security Gateway. - Configure additional settings. See "Configuring HTTPS Inspection on the Security Gateway" on page 372 .
5	Install the Access Control Policy.

HTTPS Inspection Policy

The HTTPS Inspection rules define how the Security Gateways intercepts the HTTPS connections.

Starting from R82, the HTTPS Inspection policy is divided into "Inbound Policy" and "Outbound Policy".

The HTTPS Inspection rules can use the URL Filtering categories to identify traffic for different websites and applications. For example, to protect the privacy of your users, you can use a rule to ignore HTTPS traffic to banks and financial institutions.

By default, a Security Gateway enforces HTTPS Inspection for all enabled supported Software Blades.

These are the Software Blades that support HTTPS Inspection:

- Access Control:
 - Application Control
 - URL Filtering
 - Content Awareness
 - Data Loss Prevention
- Threat Prevention:
 - IPS
 - Anti-Virus
 - Anti-Bot
 - Threat Emulation
 - Threat Extraction
 - Zero Phishing

To enforce HTTPS Inspection for a specific Software Blade, you must:

1. Enable the required Software Blade in the Security Gateway object.
2. Create an applicable rule in the HTTPS Inspection policy and in the **Blade** column, select the required Software Blade.

You can create different HTTPS Inspection layers in different policy packages. When you create a new policy package, you can use the pre-defined HTTPS Inspection layer, or customize the HTTPS Inspection layer to fit your security needs.

You can share an HTTPS Inspection layer across multiple policy packages.

Columns in HTTPS Inspection Security Policy

These are the columns in the HTTPS Inspection Security Policy rules:

(To show or hide columns, right-click any column header.)

Column	Description
No.	Rule number in the HTTPS Inspection Rule Base.
Hits	Shows the number of connections that each rule matches. For more information on how to enable the Hits column and configure the Hit Count display, see Analyzing the Rule Base Hit Count .
Name	Name that the system administrator gives this rule.
Source	Network object that defines where the traffic starts.
Destination	Network object that defines the destination of the traffic.
Services	The services (protocols) that are intercepted or bypassed. By default, the services <code>https</code> on port 443 and <code>HTTP_and_HTTPS_proxy</code> on port 8080 are intercepted. You can add or delete services in this column.
Site Category	Categories for applications or web sites that are intercepted or bypassed.
Action	The action taken by the Security Gateway when it matches HTTPS traffic to a rule. ▪ Inspect - The Security Gateway intercepts the HTTPS connection. ▪ Bypass - The Security Gateway does not intercept the HTTPS connection.  Important - For more information about the connection flow and this action, see: ▪ "Outbound HTTPS Inspection" on page 364 ▪ "Inbound HTTPS Inspection" on page 365
Track	Tracking and logging action that is done when traffic matches the rule.
Blade	By default, contains the value "All" to inspect the decrypted HTTPS traffic by all the enabled supported Software Blades. You can select specific Software Blades to inspect the decrypted HTTPS traffic.

Column	Description
Install On	Security Gateways that will enforce this HTTPS Inspection Policy. By default, this column contains the object Policy HTTPS Targets . This object automatically applies to all Security Gateways that have HTTPS Inspection enabled. In this column, you can only select Security Gateways that have HTTPS Inspection enabled.
Certificate	This column exists only in the "Inbound Policy". In this column, you select the certificate that the internal server uses for the rule.
Comment	An optional field to add a description for the rule.

Configuring HTTPS Inspection Policy

Establish distinct HTTPS Inspection rules for outbound and inbound traffic within the corresponding outbound and inbound policies.

The inbound rules use a different certificate for each internal server.

You can also create bypass rules for traffic that is sensitive and should not be intercepted. Make sure that the bypass rules are at the top of the Outbound Policy.

 **Important** - Every change in the Outbound Policy or Inbound Policy requires the installation of the Access Control policy.

Sample Outbound HTTPS Inspection Rule Base

This table shows a sample HTTPS Inspection Outbound Rule Base for a typical policy.

No	Name	Source	Destination	Services	Site Category	Action	Track	Install On
1	Financial sites	*Any	Internet	https HTTP_ HTTP_ S_ proxy	Financial Services	Bypass	Log	HTTPS Policy Targets
2	Outbound traffic	*Any	Internet	https HTTP_ HTTP_ S_ proxy	Any	Inspect	Log	HTTPS Policy Targets

1. **Financial sites** - This is a bypass rule that does not intercept HTTPS connections to websites that are defined in the "Financial Services" category.
2. **Outbound traffic** - This rule intercepts HTTPS connections to the Internet. This rule uses the Outbound CA certificate.

Sample Inbound HTTPS Inspection rule

This table shows a sample HTTPS Inspection Inbound rule for a typical policy.

No	Name	Source	Destination	Services	Action	Certificate
1	Inbound traffic	*Any	WebCalendarServer	https	Inspect	WebCalendarServer CA

Inbound traffic - This rule intercepts HTTPS connections to the network object `WebCalendarServer`. This rule uses the `WebCalendarServer` certificate.

HTTPS Inspection Policy Enforcement

HTTPS Inspection Rule Base enforcement consists of two steps:

1. Matching the connection against the Rule Base.
2. Calculating the action to be performed.

The action is calculated according to the matched rule, the Software Blades defined on the matched rule and the rule exceptions. In certain scenarios, the action in the matched rule is **Inspect**, but as a result of Step 2, the action is changed to **Bypass**. In such case, the HTTPS Inspection log is sent with data from the matched rule, but the action in the logged action is **Bypass**.

HitCount

Working with Inbound CA Certificates

By design, the Security Gateway / Security Cluster is intentionally configured not to perform HTTPS Inspection on traffic directed towards it. To change this behavior, follow [sk114574](#).

Assigning a Server Certificate for Inbound HTTPS Inspection

When a client from outside the organization initiates an HTTPS connection to an internal web server (for example, a server located in the organization's DMZ behind the Security Gateway, the Security Gateway can intercept the traffic.

To perform HTTPS Inspection in this scenario, the Security Gateway must impersonate the internal web server.

This requires the Security Gateway to present the TLS certificate of the internal web server and have access to the server's certificate private key.

Therefore, the administrator must export the certificate and the private key from the internal web server in the *.p12 format (which includes both) and then import this P12 file to SmartConsole.

After importing the server's certificate, the administrator can add the corresponding certificate object to the HTTPS Inspection Inbound Policy.

To add a server certificate for inbound HTTPS Inspection

Step	Instructions
1	In SmartConsole, go to Security Policies view > HTTPS Inspection > Inbound Policy > from the top toolbar, click Inbound Certificates .
2	Click Import . The Import Inbound Certificate window opens.
3	Enter a Certificate name and a Comment (optional).
4	Browse to the certificate file.
5	Enter the Password . Enter the same password that was used to protect the private key of the certificate on the server.

Step	Instructions
6	Click OK .
7	Click Close .

The **Successful Import** window opens the first time you import a server certificate. It shows you where to add the object in the HTTPS Inspection policy.

Click **Don't show this again** if you do not want to see the window each time you import a server certificate and **Close**.

Configuring HTTPS Inspection on the Security Gateway

You must configure HTTPS Inspection on each Security Gateway separately.

To configure HTTPS Inspection on a Security Gateway:

Step	Instructions
1	From the SmartConsole Gateways & Servers view, double-click the Security Gateway object.
2	Click HTTPS Inspection .
3	Optional: If the outbound CA certificate is already created or imported for another Security Gateway, you can use the global certificate or override it by selecting a specific certificate for each Security Gateway. To override the global certificate, navigate to HTTPS Inspection > Step 1 in the Security Gateway object, select Override global setting and select the required certificate from the drop-down list.
4	Import or Create an outbound CA certificate for HTTPS Inspection. See "Working with Outbound CA Certificates" on page 376 .
5	Export and Deploy the outbound certificate in your organization. See "Exporting and Deploying the Generated CA Certificate" on page 379 .
6	In Step 3 , select Enable HTTPS Inspection .

Step	Instructions
7	Configure the HTTPS Inspection Deployment Mode: ▪ Full inspection - HTTPS connections are intercepted based on the HTTPS Inspection policy. ▪ Learning mode - You can configure partial deployment of HTTPS Inspection to estimate its effect on connectivity and performance issues. With Learning mode, the Security Gateway intercepts a small percentage of the traffic to identify connectivity issues and estimate the expected resource consumption for the configured HTTPS Inspection policy. To see the effect of the learning mode or the statuses of all Security Gateways, go to the Security Policies view > HTTPS Inspection > Outbound Policy or Inbound Policy > in the HTTPS Inspection Tools section, click Deployment. For more information, see "HTTPS Inspection Deployment View" on page 375.

Step	Instructions
8	In Additional Settings > Edit, configure the client side and server side fail mode. In case of a client or a server connection error, you can select one of these modes: ▪ Fail Open - The Security Gateway does not perform HTTPS Inspection on connections that failed on the server side or client side (HTTPS Inspection is bypassed). ▪ Fail Close - The Security Gateway blocks connections that failed as a result of internal system error or server connection error (server side error) or as a result of client connectivity issues. You can handle server and client errors based on the global settings, or override the global settings for the specific Security Gateway. To configure Fail-mode configuration globally for all Security Gateways, see "Fail Mode" on page 384. To configure fail mode for a specific Security Gateway: a. In Additional Settings, click Edit. The HTTPS Inspection Settings window opens. b. Configure Server Side Fail Mode - In case of an internal system error or a server connection error, select one of these options: ▪ Use the global setting - The default global setting is Fail Open. ▪ Override global settings - Select Fail-Open or Fail-Close. c. Client-Side Fail Mode - In case of a client connectivity issue is detected, select one of these two options: ▪ Use the global setting - The default global setting is Fail Open. ▪ Override global settings - Select Fail-Open or Fail-Close.  Notes: ▪ In the Fail-Open mode, the Security Gateway blocks the first connection, but does not intercept subsequent connections with the same source and destination hostname, it bypasses them. ▪ In the Security Gateway versions R81.20 and lower, in case of a client-side error, the connection is always blocked (Fail-Close). You cannot change the behavior in these versions.

Step	Instructions
9	Configure Bypass Under Load - This feature allows connectivity when the Security Gateway experiences heavy load (arising from any reason, not necessarily HTTPS Inspection). The Security Gateway reacts quickly to CPU spikes to avoid connection interruptions and temporarily bypasses HTTPS Inspection until the load stabilizes. During the bypass, the Security Gateway does not intercept the HTTPS traffic. After the Security Gateway stabilizes, it attempts to resume HTTPS Inspection to minimize the bypass duration. If persistent high load is detected after inspection resumes, the Security Gateway gradually increases the bypass duration to maintain stability. This feature is disabled by default.  Important - To configure log type for Bypass Under Load, go to Security Policies > HTTPS Inspection > Inbound Policy or Outbound Policy > HTTPS Inspection Tools > Advanced Settings > Other > Bypass Under Load Logging.  Note - You configure Bypass Under Load for each Security Gateway separately. There are no global settings for this feature.
10	Click OK and Install the Access Control Policy.

HTTPS Inspection Deployment View

This view presents the statuses and recommendations for Security Gateways with HTTPS Inspection enabled in Learning Mode.

It also shows the inspection status of each Security Gateway, as follows:

- **Full inspection** - Displayed when Full Inspection is configured on the Security Gateway. The Security Gateway intercepts all HTTPS connections based on the configured HTTPS Inspection policy.
- **Learning mode** - Displayed when Learning mode is configured on the Security Gateway. Here you can see the effect of the learning mode deployment and a recommendation regarding the deployment of HTTPS Inspection.
- **Categorized HTTPS Inspection only** - Displayed when HTTPS Inspection is disabled on the Security Gateway and Categorized HTTPS websites is globally configured (**Manage and Settings** view > **Blades > Application Control & URL Filtering > Advanced Settings > URL Filtering**).
- **Disabled** - HTTPS Inspection is not enabled on the Security Gateway and the Categorized HTTPS websites option is disabled.

Working with Outbound CA Certificates

The outbound CA certificates are used by the Security Gateways managed on the Security Management Server. The first time you enable HTTPS Inspection on one of the Security Gateways, you must create an outbound CA certificate for HTTPS Inspection or import a CA certificate already deployed in your organization. Starting from R82, you can create or import additional outbound certificates.

Creating an Outbound CA Certificate

The outbound CA certificate is saved with a CER file extension and uses a password to encrypt the private key of the file. The Security Gateways use this password to sign certificates for the HTTPS Inspection. You must keep this password secure because it is also used by other Security Management Servers that import the CA certificate to open the file.

After you create an outbound CA certificate, you must export it so it can be distributed to internal clients. If you do not deploy the generated outbound CA certificate on internal clients, users receive TLS error messages in their browsers when connecting to HTTPS sites. You can configure a troubleshooting option that logs such connections.

After you create the outbound CA certificate, use it in rules that intercept outbound HTTPS traffic in the HTTPS Inspection policy.

To create an outbound CA certificate

Step	Instructions
1	In SmartConsole Gateways & Servers view, double -click the Security Gateway object. The Gateway Properties window opens.
2	In the navigation tree, click HTTPS Inspection .
3	In Step 1 , click Create .  Note - To create the first outbound certificate, you can also go to the Security Policies view > HTTPS Inspection > Outbound Policy > from the top toolbar, click Outbound Certificates .
4	Enter the necessary information: ▪ Issued by (DN) - Enter the domain name of your organization. ▪ Private key password - Enter the password that is used to encrypt the private key of the CA certificate. ▪ Retype private key password - Enter the password again. ▪ Valid from - Select the date range for which the CA certificate is valid.
5	Click OK .

Step	Instructions
6	Export and deploy the CA certificate. See "Exporting and Deploying the Generated CA Certificate" on page 379 .

Importing an Outbound CA Certificate

You can import a CA certificate that is already deployed in your organization or import a CA certificate created on one Security Management Server to another Security Management Server.

 **Best Practice** - Use *private* CA Certificates.

For each Security Management Server that has Security Gateways with HTTPS Inspection enabled, you must:

1. Import the CA certificate.
2. Enter the password the Security Management Server uses to open the CA certificate file and sign the certificates for users. Use this password only when you import the certificate to a new Security Management Server.

To import an outbound CA certificate

Step	Instructions
1	If the CA certificate was created on another Security Management Server, export the certificate from the Security Management Server, on which it was created. See "Exporting a Certificate from one Security Management Server to Another" on page 380 .
2	In the SmartConsole Gateways & Servers view, double-click the Security Gateway object.
3	In the navigation tree, click HTTPS Inspection .
4	In Step 1 , click Import .  Note - You can also import the first outbound certificate you create through the Security policies view > HTTPS Inspection > Outbound Policy > from the top toolbar click Outbound Certificate .
5	Browse to the certificate file.
6	Enter the private key password .
7	Click OK .

Step	Instructions
8	If the CA certificate was created on another Security Management Server, deploy it to clients. Click <i>"Exporting and Deploying the Generated CA Certificate" on the next page</i>.

Exporting and Deploying the Generated CA Certificate

To prevent users from getting warnings about the generated CA certificates that HTTPS Inspection uses, install the generated CA certificate used by HTTPS Inspection as a trusted CA. You can distribute the CA with different distribution mechanisms such as Windows GPO. This adds the generated CA to the trusted root certificates repository on client computers.

When users run standard updates, the generated CA is in the CA list and they do not receive certificate warnings in their browsers.

To distribute a certificate with a GPO

Step	Instructions
1	Export the certificate from the Security Gateway: To export an outbound certificate, use one of these two options: Option 1 - In SmartConsole, go to the Security Policies view > HTTPS Inspection > Outbound Policy. - In the top tool bar, click Outbound Certificates. The Manage Outbound Certificates window opens. - Select the required certificate, and click the  button. - Select the required folder in which to save the certificate, and click Save. Option 2 - In SmartConsole > the Gateways & Servers view > double-click the required Security Gateway object. The Security Gateway object editor opens. - From the left menu, go to HTTPS Inspection. - In Step 2, click Export Certificate. - Select the required folder in which to save the certificate, and click Save.
2	Use the Group Policy Management Console to add the certificate to the Trusted Root Certification Authorities certificate store. See "Deploying Certificates using Group Policy" on the next page.
3	Push the GPO Policy to the client computers in the organization.  Note - Make sure that the CA certificate is pushed to the client computer organizational unit.
4	Test the CA certificate distribution by browsing to an HTTPS site from one of the client computers. Also, make sure the CA certificate shows the name you entered for the CA certificate that you created in the Issued by field.

Deploying Certificates using Group Policy

You can use this procedure to deploy a certificate to multiple client computers with Active Directory Domain Services and a Group Policy Object (GPO). A GPO can contain multiple configuration options, and is applied to all computers in the scope of the GPO.

 **Important** - Membership in the local Administrators group, or equivalent, is necessary to complete this procedure.

To deploy a certificate using Group Policy

Step	Instructions
1	On the Microsoft Windows Server, open the Group Policy Management Console .
2	Find an existing GPO or create a new GPO to contain the certificate settings. Make sure the GPO is associated with the domain, site, or organization unit whose users you want affected by the policy.
3	Right-click the GPO and select Edit . The Group Policy Management Editor opens and shows the contents of the policy object.
4	Open Computer Configuration > Policies > Windows Settings > Security Settings > Public Key Policies > Trusted Publishers .
5	Click Action > Import .
6	Do the instructions in the Certificate Import Wizard to find and import the certificate you exported from SmartConsole.
7	In the navigation pane, click Trusted Root Certification Authorities and repeat steps 5-6 to install a copy of the certificate to that store.

Exporting a Certificate from one Security Management Server to Another

If you use more than one Security Management Server in your organization, you must *first* export the CA certificate with the "export_https_cert" CLI command from the Security Management Server on which it was created before you can import it to other Security Management Servers.

Command syntax

```
export_https_cert -help
```



```
export_https_cert {[-local] | [-s <server address>]} [-f  
<certificate file name in the FWDIR/tmp/ directory>]
```

To export the CA certificate

On the Security Management Server, run this command:

```
$FWDIR/bin/export_https_cert -local -f <certificate file name in  
the FWDIR/tmp/ directory>
```

Example:

```
$FWDIR/bin/export_https_cert -local -f mycompany.cer
```

 **Note** - On a Multi-Domain Security Management Server, you must run this command in the context of the applicable Domain Management Server (`mdsenv <IP Address of Domain Management Server>`).

Working with Trusted CAs for Outbound HTTPS Inspection

When a client initiates a TLS connection to a server, the Security Gateway intercepts the TLS connection. The Security Gateway intercepts the traffic and creates a new TLS connection from the Security Gateway to the designated server.

When the Security Gateway establishes a TLS connection to the designated server, it must validate the server certificate.

HTTPS Inspection comes with a preconfigured list of trusted CAs. This list is updated by Check Point when necessary and is downloaded automatically from the Check Point Download Center to the Management Server. After you get the Trusted CA update on the Security Management Server, you must install the policy on the Security Gateways. You can select to disable the automatic update option and manually update the Trusted CA list. See [sk64521](#).

If the Security Gateway receives a non-trusted server certificate, by default the user gets a self-signed certificate and not the generated certificate. A page notifies the user that there is a problem with the server security certificate, but lets the user continue to the server.

You can change the default setting to block untrusted server certificates. Go to **Security Policies > HTTPS Inspection > HTTPS Inspection Tools > Advanced Settings > Server Validations > select Untrusted server certificates**.

To manage the list of Trusted Certificates, in SmartConsole, go to the **Security Policies** view > **HTTPS Inspection >** in the **HTTPS Inspection Tools** section, click **Trusted Certificates**.

You can do these actions, in the **Trusted Certificates** window:

- In the **Trusted CAs Package** tab:
 - You can check if the trusted CAs package is up-to-date. You can see details about the downloaded package version, the last update timestamp, and the last check for these statuses. You can update the certificates in one of two ways:
 - Automatic update:

Select **Update Trusted CA package automatically**. The Trusted CAs package is updated automatically once a day at 2:00 AM.
 - Manual update:

Select **Updated Trusted CAs Package manually**, and click **Update Now** or **Import Trusted CAs Package**, to manually update the package.

- In the **Certificates** section, you can view all certificates included in the package, export certificates, enable or disable certificates.

To enable or disable certificates:

1. Select the applicable certificates using the checkboxes.

Note - You can select all certificates by clicking the top checkbox.

2. From the top-menu, click **Actions**, and select **Enable** or **Disable**

- In the **Custom Trusted Certificates** tab, you can import, export or delete a certificate.



Note - To apply changes in the Trusted CAs settings, install policy on the applicable Security Gateway.

HTTPS Inspection Global Settings

You can configure HTTPS Inspection global settings for all Security Gateways in **Security Policies > HTTPS Inspection > HTTPS Inspection Tools > Advanced Settings**.

Fail Mode

To change the global settings for the fail mode

1. Go to the **Security Policies** view > **HTTPS Inspection** > **Inbound Policy** or **Outbound Policy** > in the **HTTPS Inspection Tools** section, click **Advanced Settings**.
2. Go to **Fail Mode**, and select the applicable settings:
 - a. In **Server Side Fail Mode**, select one of these options:
 - **Bypass all requests (Fail-Open)**
 - **Block all requests (Fail-Close)**
 - b. In **Client Side Fail Mode**, select one of these options:
 - **Bypass all requests (Fail-Open)**
 - **Block all requests (Fail-Close)**

Notes:

- In the Fail-Open mode, the Security Gateway blocks the first connection, but does not intercept subsequent connections with the same source and destination hostname, it bypasses them.
- In the Security Gateway versions R81.20 and lower, in case of a client-side error, the connection is always blocked (Fail-Close). You cannot change the behavior in these versions.

Categorization Mode

Configure a mode for categorizing HTTPS sites:

- **Background** - All requests are allowed until categorization is complete. When a request cannot be categorized with a cached response, an uncategorized response is received. Access to the site is allowed. In the background, the Check Point Online Web Service continues the categorization procedure. The response is then cached locally for future requests. This option reduces latency in the categorization procedure.
- **Hold** - This is the default setting. When a request cannot be categorized with the cached responses, it remains blocked until the Check Point Online Web Service completes categorization.

Server Validations

When a Security Gateway receives an untrusted certificate from a website server, the settings in this section define when to drop the connection.

- **Untrusted server certificate:**

- When selected traffic from a site with an untrusted server certificate is immediately dropped. The user gets an error page that states that the browser cannot display the webpage.
- When cleared, a self-signed certificate shows on the client machine when there is traffic from an untrusted server. The user is notified that there is a problem with the website's security certificate, but the user can continue to the website (default).

- **Revoked server certificate (validate CRL):**

- When selected, the Security Gateway validates the site certificate of each server. The Security Gateway validates the certificate using the Online Certificate Status Protocol (OCSP) standard. OCSP is faster and uses much less memory than Certificate Revocation List (CRL) Validation, which is used for certificate validation in releases lower than R80.10.
- When cleared, the Security Gateway does not check for revocations of server site certificates.

If OCSP is not supported for a server certificate, the Security Gateway uses CRL validation. If the CRL cannot be reached, the certificate is considered trusted. This is the default configuration. An HTTPS Inspection log is issued that indicates that the CRL could not be reached.

You can change this behavior in Database Tool (GuiDBEdit Tool):

Procedure

 **Important** - This change applies to all Security Gateways with enabled HTTPS Inspection

1. Close all SmartConsole windows.
2. Connect with the [Database Tool \(GuiDBEdit Tool\)](#) to the Management Server.
3. In the top left panel, click **Other > ssl_inspection**.
4. In the top right panel, click **general_confs_obj** and change.
5. In the bottom panel, right-click the attribute "**drop_if_crl_cannot_be_reached**" > click **Edit**.
6. Change the value from "**false**" to "**true**" > click **OK**.
7. From the top, click the **File** menu and click **Save All**.

8. Close the Database Tool (GuiDBEdit Tool).
9. Connect with SmartConsole to the Management Server.
10. Install the Access Control policy.

To validate the CRL, the Security Gateway must have access to the Internet. For example, if a proxy server is used in the organizational environment, you must configure the Security Gateway to use this proxy server.

To configure the proxy server for the Security Gateway:

Optionally, you can use the default proxy server configured in SmartConsole Global Properties.

1. In SmartConsole, go to the **Gateways & Servers** view, and double-click the Security Gateway that requires proxy configuration.
2. Go to **Network Management > Proxy**.
3. Select **Use custom proxy settings for this network object** and **Use proxy server**, and enter the proxy IP address.
4. Click **OK**.
5. Install the Access Control policy.

 **Important** - Make sure that there is a rule in the Rule Base that allows outgoing HTTP from the Security Gateway

■ Expired Server Certificate

- When selected, the Security Gateway drops the connection if the server certificate expired.
- When cleared, the Security Gateway creates a certificate with the expired date. The user can continue to the website (default).

■ Track validation errors

Select whether to log the server validation (you can see the logs in the **Logs & Events** view > **Logs** in SmartConsole), or trigger other notifications.

Certificate Blocking

You can create a list of certificates that are blocked. Traffic from servers using these certificates is dropped. If a certificate in the list is also in the Trusted CAs list, the block certificate list overrides the Trusted CAs list.

- **New** - Lets you add a certificate. Enter the certificate serial number (in hexadecimal format HH:HH) and a comment that describes the certificate.
- **Edit** - Lets you change the details of the blocked certificate list.

- **Delete** - Lets you delete a certificate from the blocked certificate list.
- **Search** - Lets you search for a certificate in the blocked certificate list.
- **Track dropped traffic** - Select whether to log the server validation (you can see the logs in the **Logs & Events** view > **Logs** in SmartConsole), or trigger other notifications.

Bypass Allow Lists

Check Point dynamically updates lists of well-known update services and certificate-pinned applications that can be bypassed for improved connectivity.

- **Well-known update services** - Some well-known update services must be bypassed to function correctly. For the list of updated services, see [sk98655](#).
- **Certificate-pinned Applications** - Some mobile and desktop applications trust only specific server certificates. Such applications may terminate the connection due to a trust issue when presented with a certificate signed by HTTPS Inspection's outbound CA certificate. When a connection from a client which is classified as a certificate-pinned application is detected, the selected action is taken.

Available actions:

Action	Action Description
Bypass	HTTPS Inspection is bypassed to ensure uninterrupted connectivity, and a 'bypass' log is sent.
Detect	HTTPS Inspection is not bypassed, and a "Detect" log is sent. The application may show errors or malfunction.
None	HTTPS Inspection is not bypassed, and a dedicated log is not sent. The application may show errors or malfunction.

Session Logs

Starting in R82, the Security Gateway can send session logs, which provide a visual overview of the TLS traffic passing through it.

To allow the Security Gateway to send these logs:

1. Select **Send session logs**.
2. In the HTTPS Inspection Rule Base, set the **Track** column of the applicable rules to **Log**.

HTTPS Inspection session logs group individual connections into session logs based on several common characteristics:

- Source IP
- Destination IP
- SNI (Server Name Indication)
- HTTPS Inspection Action: Whether the traffic is bypassed or intercepted.
- Bypass Reason: Applicable only if the traffic is bypassed.
- Time Window: Connections that occur within the same 3-hour period.

By aggregating connections with these characteristics, session logs are used to create statistics views, including **Bypass** and **Inspect** decisions. For more details, see ["HTTPS Inspection Statistics View" on the next page](#).

Other

Intermediate CA

Use the "Certificate Authority Information Access" extension to retrieve certificates that are missing from the certificate action.

Automatically retrieve intermediate CA certificates:

- When selected, intermediate CA certificates issued by trusted root CA certificates that are not part of the certificate chain are automatically retrieved using the information on the certificate (default).
- When cleared, a web server certificate signed by an intermediate CA and not sent as part of the certificate chain, is considered untrusted.

Bypass Under Load Logging

To configure the log type for Bypass Under Load:

1. Go to the **Security Policies** view > **HTTPS Inspection** > **Inbound Policy** or **Outbound Policy**
2. In the **HTTPS Inspection Tools** section, click **Advanced Settings**.
3. Click **Other**.
4. In the **Bypass Under Load Logging** section, in the **Track** field, select the applicable option.
5. Click **OK**.
6. Install the Access Control policy.

HTTPS Inspection Statistics View

Starting in R82, you can view HTTPS Inspection statistics in the Logs & Events view and in SmartView. The HTTPS Inspection statistics view provides a visual overview of HTTPS traffic that passes through the Security Gateway, including bypass and inspect statistics. The Statistics view is updated every time the Security Gateway sends a session log. (see ["Session Logs" on page 387](#)).

Configuration

1. **Enable the required Software Blades on the Management Server or Log Server**
 - a. Connect with SmartConsole to the Management Server.
 - b. On the left navigation panel, go to the Gateways & Servers view.
 - c. Double-click the object of the Management Server or Log Server, to which the Security Gateway sends its logs.
 - d. In the left panel, click **General Properties**.
 - e. In the **Management** tab, select these Software Blades:
 - **Logging & Status**
 - **SmartEvent Server**
 - **SmartEvent Correlation Unit**
 - f. Click **OK** and publish your changes.
 - g. In the top left corner, click **Menu > Install database**.
 - h. Select all objects and click **Install**.
 - i. Monitor the task progress in the bottom left corner.
2. **Enable HTTPS Inspection session logs on the Security Gateway**
 - a. In SmartConsole, go to the **Manage & Settings** view > **Blades > HTTPS Inspection > Advanced Settings**.
The **HTTPS Inspection - Global Settings** window opens.
 - b. In the left navigation tree, go to **Session Logs**.
 - c. Select **Session Logs** and click **OK**.

Viewing HTTPS Inspection Statistics

You can view the HTTPS Inspection statistics in these two locations:

In SmartConsole

1. On the left navigation panel, click Logs & Events.
2. At the top, click **[+]** to open a new tab.
3. In the left section, click **Views**.
4. In the top search field, enter: **HTTPS**.
5. Double-click the view called **HTTPS Inspection Statistics**.

In SmartView

1. With a web browser, connect to the SmartView portal on the Management Server or Log Server, to which the Security Gateway sends its logs.

For example:

`https://192.168.22.33/smartview/`

2. At the top, click **[+]** to open a new tab.
3. In the left section, click **Views**.
4. In the top search field, enter: **HTTPS**
5. Double-click the view **HTTPS Inspection Statistics**

To see log details:

1. In the HTTPS Inspection Statistics view, double-click the applicable chart or graph to see all the related session logs.
2. Double-click the applicable session log to see all the related connection logs (appear in the bottom panel).
3. Double-click the applicable connection log to see the complete log details.

SNI support for Site Categorization

Starting from R80.30, a new functionality allows the categorization of HTTPS sites before the HTTPS Inspection begins, and prevents connectivity failure if the inspection does not succeed.

SNI is an extension to the TLS protocol, which indicates the hostname at the start of the TLS handshaking process.

The categorization is performed by examining the SNI field in the client hello message at the beginning of the TLS handshaking process. To make sure that you reached the right site, the SNI is verified against the Subject Alternative Name of the host, which appears in the certificate.

After the identity of the host is known and verified, the site is categorized, and it is determined whether the connection should be intercepted or not.

SNI support is enabled by default.

HTTPS Inspection on Non-Standard Ports

Applications that use HTTP normally send the HTTP traffic to the TCP port 80. Some applications send HTTP traffic on other ports also. You can configure some Software Blades to only inspect HTTP traffic on port 80, or to also inspect HTTP traffic on non-standard ports.

The security policies inspect all HTTP traffic, even if it is sent using non-standard ports. This option is enabled by default. You can configure this option in the **Manage & Settings** view > **Blades > Threat Prevention > Advanced Settings > General > HTTPS Inspection**. If you make this change, you must install the Access Control policy.

Inspection of TLS v1.3 Traffic

Starting from R81, the Check Point Security Gateway can intercept traffic that relies on Transport Layer Security (TLS) v1.3 (see [RFC 8446](#)).

From R81.10, this feature is enabled by default for Security Gateways (and Cluster Members) that use the User Space Firewall (USFW)).

For the list of supported platforms, see [sk167052](#).



Notes:

- To disable the inspection of the TLS v1.3 traffic for testing purposes, set the value of the global parameter "fwtls_enable_tlsio" to 0 with this command:

```
fw ctl set -f int fwtls_enable_tlsio 0
```
- To enable the inspection of the TLS v1.3 traffic again, set the value of the global parameter "fwtls_enable_tlsio" to 1 with this command:

```
fw ctl set -f int fwtls_enable_tlsio 1
```
- HTTPS Inspection does not support TLS v1.3 when the Security Gateway / Cluster is configured as an HTTP/HTTPS Proxy ([sk110013](#)).

Inspection of HTTP/3 protocol (RFC 9114)

Starting from R82, Check Point Security Gateways can inspect the decrypted inbound and outbound HTTP/3 traffic based on the configuration of the enabled Software Blades.

HTTP/3 is a new version of the HTTP protocol designed to improve speed, reliability, and security, by using the QUIC transport protocol, which operates over UDP instead of TCP. The HTTP/3 protocol ([RFC 9114](#)) optimizes transport of HTTP semantics over QUIC.

HTTP/3 retains all core features of HTTP/2, while enhancing efficiency through reduced latency and improved performance.

HTTP/3 over TLS enables HTTP/3 connections over a secure TLS connection.

★ **Best Practice** - For Security Gateways running version R81.20 and earlier, block the QUIC protocol as described in [sk111754](#).

Limitations

- The Security Gateways supports HTTP/3 inspection only when it runs in the User Space Firewall (USFW) mode, which is the default in versions R82 and higher.

The Security Gateway downgrades HTTP/3 traffic to an earlier HTTP version when it operates in the kernel mode firewall.

For information about the User Space Firewall (USFW) mode, see the Release Notes for your version and [sk167052](#).

- The Security Gateway drops HTTP/3 traffic when the Threat Prevention "Deep Inspection" mode is enabled.
- Chromium-based web browsers allow HTTP/3 traffic only if the HTTPS Inspection certificate is signed by a trusted CA from the Chromium trust list.

Chromium-based web browsers do not allow adding certificates for HTTP/3 traffic to the browser's trusted store. See [sk111754](#).

- Inspection of QUIC traffic over a proxy is not supported.
- All other protocols, except HTTP/3, will be downgraded to an earlier HTTP version.

Using HTTPS/3 the in a Rule Base

For transparent QUIC inspection, the QUIC service was added default HTTPS services group. You can use it in the Access Control policy in the **Services & Applications** column, and in the HTTPS Inspection policy, in the **Services** column.

For example:

N o.	Name	Sour ce	Destinat ion	Servic es	Categor y/ Custom Applicat ion	Action	Trac k	Blad e	Install On
1	QUIC - Bypas s the "game s" categ ory	*Any	Intern et	quic	Games	Bypas s	Log	All	Polic y HTTPS Targe ts
2	QUIC - Inspec t	*Any	Intern et	quic	Any	Inspe ct	Log	All	Polic y HTTPS Targe ts

Monitoring the HTTP/3 inspection

You can view the HTTP/3 inspection statistics on the Security Gateway in CPView:

1. Connect to the command line on the Security Gateway, and run:

```
cpview
```

2. At the top, click **Advanced > HTTP-Parser > QUIC**.

Example output:

```
|-----|
|-----|
|-----|
| CPVIEW.Advanced.HTTP-Parser.QUIC

13Jul2024 16:48:27 |
|-----|
|-----|
|-----|
| Overview SysInfo Network CPU I/O Software-blades Hardware-Health
Management Advanced
|-----|
|-----|
|-----|
```

```
| Logging CPU-Profiler Memory Network SDWAN SecureXL ClusterXL
CoreXL PrioQ Streaming NAT MUX Routed RAD Conn-Tracker UP HTTP-
Parser SSH-Parser CPAQ      >>
```

```
|-----|
|-----|
```

```
| General HTTP3-Information QUIC
```

```
|-----|
|-----|
|-----|
```

```
| Connections overview
```

```
|-----|
|-----|
```

```
| Processed Connections: 0
```

```
| HTTPS Inspection - Inspect: 0
```

```
| Website Categorization: 0
```

```
| HTTPS Inspection - Bypass on first packet: 0
```

```
| HTTPS Inspection - Bypass on category/app: 0
```

```
| Downgraded: 0
```

```
| Closed with error: 0
```

```
|-----|
|-----|
|-----|
```

```
| Downgrade reasons
```

```
|-----|
|-----|
|-----|
```

QUIC inspection disabled	0
Strict Hold is active	0
Exception	0

QUIC Errors	
Error type	#
of errors	# in the last 10 min window
Unknown error	0
	0
Transport internal error	0
	0
Connection refused	0
	0
Flow control violation on stream	0
	0
Frame exceeding stream limits	0
	0
Received frame mismatch with stream state	0
	0
New final size mismatch with previous final size	0
	0
Could not decode frame	0
	0
Bad transport parameters	0
	0

Received connection ID going over the limit	0
Protocol violation	0
Invalid token	0
Connection timeout due to lack of progress	0
Crypto buffer exceeded crypto level in stream	0
Key update error	0
AEAD limit reached	0
No viable path	0
Cannot create control stream: peer-imposed limit	0
HTTP internal error	0
Cannot create stream	0
Critical stream closed	0
Unexpected frame received on stream	0
Malformed frame: could not parse frame	0
Excessive load	0
Invalid stream ID	0

Unexpected HTTP/2 setting	0
0	
First control frame is not SETTINGS	0
0	
Got stream while going away	0
0	
Refuse push stream	0
0	
Request is incomplete	0
0	
Parsing error: frame contains invalid headers	0
0	
Content error	0
0	
Version fallback	0
0	
Stream QPACK decompression error	0
0	
Error interpreting QPACK encoder stream	0
0	
Error interpreting QPACK decoder stream	0
0	
Invalid certificate	0
0	

Configuring Threat Indicators

Indicators of Compromise (IoCs) represent a combination of observable objects, behavioral patterns, and contextual intelligence that together describe malicious activity within an operational cyber domain.

An Indicator is a set of observables that collectively represent or demonstrate malicious activity.

An Observable is an event or a stateful property that can be observed in an operational cyber domain, such as: IP address, a file signature, a URL, an email address and so on. On their own, observables are raw data points. When enriched with behavior and context, they become actionable threat indicators.

Threat indicators demonstrate attacks through:

- Specific observable patterns, such as repeated communication with known command-and-control servers or the presence of malicious files.
- Behavioral characteristics, including lateral movement, process injection, data exfiltration attempts, unusual login activity, and other attacker techniques.
- Contextual and descriptive metadata, which gives meaning to the indicator and enables automated and human-driven response. This contextual information may include the indicator type, source, severity, confidence level, recommended action (prevent, detect, log), timestamps, descriptions, references, and associated security products such as Anti-Bot, Anti-Virus, or IPS.

Indicators are derived from multiple sources, including threat intelligence providers, internal analysis, government organizations, and trusted partners.

The IoC Feeds feature lets you fetch feeds from a third-party server directly to the Security Gateway. The Security Gateway enforces the feeds through the Anti-Bot, Anti-Virus and IPS engines, in addition to the feeds included in the Check Point packages and ThreatCloud feeds. The IoC Feeds feature helps you manage and monitor indicators with minimum operational overhead. You can upload the feeds through SmartConsole or the CLI.

Importing Threat Indicator Files through SmartConsole

When you manually upload threat indicator files through SmartConsole, the files must be in a CSV Check Point format or STIX XML (STIX 1.0) format. The files must contain records of equal size. If an indicator file has records which do not have the same number of fields, it does not load.

To load indicator files through SmartConsole

Before you start - Go to the applicable profile > **Indicators** > **Activation** > make sure that **Enable indicator scanning** is selected.

Step	Instructions
1	In the SmartConsole main view, go to Security Policies>Threat Prevention>Custom Policy >Custom Policy Tools> Indicators . If you are working with Autonomous Threat Prevention, go to Security Policies > Threat Prevention > Autonomous Policy > Autonomous Policy Tools > Indicators .
2	Click New , and select New IOC file . The Indicator configuration window opens.
3	Enter a Name . Each Indicator must have a unique name.
4	Enter Object Comment (optional).
5	Click Import to browse to the indicator file. The content of each file must be unique. You cannot load duplicate files.
6	Select an action for this Indicator: ▪ Prevent - Threat Prevention Software Blade blocks the detected observable ▪ Detect - Threat Prevention Software Blade creates a log entry, and lets the detected observable go through ▪ Inactive - Threat Prevention Software Blade does nothing
7	Add Tag .
8	Click OK . If you leave an <i>optional</i> field empty, a warning notifies you that the default values are used in the empty fields. Click OK . The Indicator file loads.
9	Install the Threat Prevention Policy.

To delete Indicators

Step	Instructions
1	Select an <i>Indicator</i> .
2	Click Delete .
3	In the window that opens, click Yes to confirm.

You can edit properties of an Indicator object, except for the file it uses. If you want an Indicator to use a different file, you must delete it and create a new one.

Importing External Custom Intelligence Feeds

Custom Intelligence Feeds lets you fetch feeds from a third-party server directly to the Security Gateway to be enforced by the Anti-Virus, Anti-Bot and IPS blades. The Custom Intelligence Feeds feature helps you manage and monitor indicators with minimum operational overhead.

Starting from R81.20, the Check PointSecurity Gateway supports at least 2 million patterns/observables for these observable types: URL, Domain, IP addresses, and Hashes. The maximum number of supported patterns/observables is limited by the available memory and disk space on the Security Gateway. Before the Security Gateway loads more patterns/observables, it checks if 50% of the total memory is free.

Enforcement and Policy Behavior

- IoC feeds are fetched on all connections.
- The Threat Prevention policy does not control feeds enforcement.
- Policy installation does not fail if a Security Gateway cannot fetch a feed.

In this case, the Security Gateway generates a control log.

Importing External Custom Intelligence Feeds in CLI

You can import threat indicator feeds from external sources directly on the Security Gateway.

After you import the feeds for the first time and install policy, the Security Gateway automatically pulls and enforces the indicator file each time the feed file is updated.

The Security Gateway imports the file over HTTP or HTTPS, or by reading from a local file or local directory.

 **Important** - You must import the feed files on each Security Gateway and each Cluster Member separately.

You can import indicator feeds in the CLI in these formats:

- CSV in the Check Point format
- Custom CSV in other formats
- STIX XML (STIX 1.0)
- Snort version 2.9 or lower.

Feed's Resource

The Feed's resource for all formats can be one of these:

Resource	Description	Syntax Example
URL	HTTP or HTTPS.  Note - HTTPS resource with a self-signed certificate prompts for a user agreement to update the Trusted CA bundle. You can skip the certificate verification by running this command in the Expert mode on the Security Gateway before you run the "ioc_feeds" command: <pre>export EXT_IOC_NO_SSL_VALIDATION=1</pre>	<pre>ioc_feeds add --feed_name remote_feed --transport http -- resource "http://10.0.0.1/my_ feeds/stix_feed.xml"</pre>

Resource	Description	Syntax Example
Local File	Local File on the Security Gateway.	<code>ioc_feeds add --feed_name local_feed --transport local_file --resource "/home/admin/my_feed.csv"</code>
Local Directory	Local Directory on the Security Gateway that contains the applicable files in the correct feed format.	<code>ioc_feeds add --feed_name local_feed --transport local_directory --resource "/home/admin/my_feed_folder"</code>

'ioc_feeds' CLI Commands for Managing External Custom Intelligence Feeds

Use these "ioc_feeds" commands in the Expert mode on the Security Gateway to import and manage threat indicator files.

Commands

Command	Description	Syntax Example
<code>ioc_feeds -h</code>	Shows the built-in help.	
<code>ioc_feeds push</code>	Pushes feeds now.	<code>ioc_feeds push</code>
<code>ioc_feeds show</code>	Shows all existing feeds.	<code>ioc_feeds show</code>
<code>ioc_feeds show --feed_name <Feed></code>	Shows details for the specified feed.	<code>ioc_feeds show --feed_name local_feed</code>
<code>ioc_feeds show_interval</code>	Shows the fetching interval.	<code>ioc_feeds show_interval</code>
<code>ioc_feeds set_interval <sec></code>	Configures the interval (in seconds) for fetching all feeds.	<code>ioc_feeds set_interval 1000</code>
<code>ioc_feeds show_scanning_mode</code>	Shows the statue of the scanning mode.	<code>ioc_feeds show_scanning_mode</code>

Command	Description	Syntax Example
<code>ioc_feeds set_ scanning_ mode {on off}</code>	Enables (on) or disables (off) the scanning mode.	<code>ioc_feeds set_scanning_mode off</code>

Command	Description	Syntax Example
ioc_feeds add	Adds a new feed. Mandatory parameters: ■ <code>--feed_name <Feed></code> Configures the feed name. ■ <code>--transport {http https} --resource <URL></code> Specifies a remote feed URL. ■ <code>--transport local_file --resource <Absolute Path to Local File></code> Specifies a local feed file. ■ <code>--transport local_directory -resource <Absolute Path to Local Directory></code> Specifies a local feed directory. Must be inside the /home/ directory. Optional parameters: ■ <code>--state {true false}</code>	Example 1 - local file feed: <pre>ioc_feeds add --feed_name local_feed --transport local_file --resource /home/admin/my_feed.csv</pre> Example 2 - remote feed through a proxy: <pre>ioc_feeds add --feed_name remote_feed --transport http --resource "http://10.0.0.1/my_feeds/stix_feed.xml" --proxy 192.168.22.33:8080 --state false -feed_action Detect --user_name admin@example.com</pre> Example 3 - dry run for a remote feed: <pre>ioc_feeds add --feed_name remote_stix_file --transport http --resource "http://www.public_indicators.com/ioc_stix_file.xml" --test true</pre>

Command	Description	Syntax Example
	Configures the feed state - active (<code>true</code>, this is the default) or inactive (<code>false</code>). ■ <code>--feed_action</code> <code>{Prevent Detect Ask}</code> Configures the feed action (default - Prevent) ■ <code>--user_name</code> <code><user></code> Specifies the username for the feed source - a prompt for a password appears. ■ <code>--proxy</code> <code>none</code> Specifies not to use any proxy when connecting to the feed source. If you do not specify the <code>--no_proxy</code> or the <code>--proxy</code> parameter, the tool uses the Security Gateway proxy. ■ <code>--proxy</code> <code><proxy server>:<proxy port></code>	

Command	Description	Syntax Example
	Overrides the Security Gateway proxy when connecting to the feed source. If you do not specify the "--no_proxy" or the "--proxy" parameter, the tool uses the Security Gateway proxy. ■ <code>--proxy_user_name <user></code> Specifies the username for the proxy server - a prompt for a password appears. ■ <code>--test true</code> Performs a dry run - fetches and parses the specified feed but does not save its configuration.	
<code>ioc_feeds modify</code>	Modifies an existing feed. Values of the feed parameters that are not specified, stay as they were before.	<pre>ioc_feeds modify --feed_name local_feed --state true</pre>

Command	Description	Syntax Example
<code>ioc_feeds delete</code>	Deletes existing specified feed. Mandatory parameter: ■ <code>--feed_name <feed></code> Specifies the feed name.	<pre>ioc_feeds delete --feed_name local_feed</pre>

CSV Check Point and STIX Formats

Each record in CSV Check Point format and the STIX XML (STIX 1.0) format must have these fields:

Fields

Field	Description	Valid Values	Value Criteria	Field Type
UNIQ-NAME	Name of the observable	Free text	Must be unique	Mandatory
VALUE	A valid value for the type of the observable	As provided in this table	Value of a parameter	Mandatory

Field	Description	Valid Values	Value Criteria	Field Type
TYPE	Type of the observable	URL	Any valid URL Not case-sensitive	Mandatory
		Domain	Any URL Domain	
		IP	Standard IPv4 address	
		IP Range	A range of valid IPv4 addresses, separated by a hyphen: <IP1>-<IP2>	
		MD5	Any valid MD5 hash	
		SHA1	Any valid SHA1 hash	
		SHA256	Any valid SHA256 hash	
		Mail-subject	Any non-empty text string	
		Mail-from	Can be one of these: ▪ A single email address Example: abc@domain.com ▪ An email domain Examples: @domain.com, or domain.com	
		Mail-to	Can be one of these: ▪ A single email address Example: abc@domain.com ▪ An email domain Examples: @domain.com, or domain.com	

Field	Description	Valid Values	Value Criteria	Field Type
CONFIDENCE	Degree of confidence the observable presents	Mail-cc	Can be one of these: ▪ A single email address Example: abc@domain.com ▪ An email domain Examples: @domain.com, or domain.com	Optional
		Mail-reply-to	Can be one of these: ▪ A single email address Example: abc@domain.com ▪ An email domain Examples: @domain.com, or domain.com	
		▪ low ▪ medium ▪ high ▪ critical	Default - high	
SEVERITY	Degree of threat the observable presents	▪ low ▪ medium ▪ high ▪ critical	Default - high	Optional

Field	Description	Valid Values	Value Criteria	Field Type
PRODUCT	Check Point Software Blade that processes the observable	■ AV ■ AB	■ AV - Check Point Anti-Virus Software Blade (default) Note - Only the Anti-Virus Software Blade can process MD5, SHA1, and SHA256 observables. ■ AB - Check Point Anti-Bot Software Blade	Optional
COMMENT		Free text		Optional

Notes

- If an optional field is empty, the default value is used.
- If a mandatory field is empty, the Indicator file does not load.
- STIX 2.0 (JSON file) is not supported.
- Custom Indicators CLI (`load_indicators`) are not supported.
- The supported STIX elements are:

<code>stix:STIX_Package</code>	<code>cyboxCommon:Hash</code>
<code>stix:STIX_Header</code>	<code>cyboxCommon:Type</code>
<code>stix>Title</code>	<code>cyboxCommon:Simple_Hash_Value</code>
<code>stix:Description</code>	<code>stix:Observables</code>
<code>stix:Indicators</code>	<code>cybox:Observable</code>
<code>stix:Indicator</code>	<code>URIObj:Value</code>
<code>indicator>Title</code>	<code>URIObject:Value</code>
<code>indicator:Type</code>	<code>AddressObject:Address_Value</code>
<code>indicator:Description</code>	<code>AddressObj:Address_Value</code>
<code>indicator:Observable</code>	<code>AddressObj:AddressObjectType</code>
<code>cybox:Object</code>	<code>AddressObjet:AddressObjectType</code>
<code>cybox:Properties</code>	<code>cybox:Title</code>
<code>FileObj:Hashes</code>	

Condition Type Enum and **Condition Application Enum** support the values **Equals** and **Any**.

Example:

```
<cyboxCommon:Simple_Hash_Value condition="Equals" apply_
condition="ANY">
```

Syntax rules of CSV Indicator files in Check Point format

- Use commas to separate the fields in a record
- Enter one record per line, or use '\n' to separate the records
- If free text contains quotation marks, commas, or line breaks, it must be enclosed in quotation marks
- To enclose part of free text in quotations, use double quotation marks: "<text>"

Example of a CSV Indicator File in Check Point Format

```
#! DESCRIPTION = indi file,,,,,,,,
"#! REFERENCE = Indicator Bulletin; Feb 20, 2014",,,,,,
# FILE FORMAT:,,,,,
"# All lines beginning ""#"" are comments",,,,,,
"# All lines beginning ""#!"" are metadata read by the SW",,,,,,
"# UNIQ-NAME,VALUE,TYPE,CONFIDENCE,SEVERITY,PRODUCT,COMMENT",,,,,,
observ1,8d9b6b8912a2ed175b77acd40cbe9a73,MD5,medium,medium,AV,FILENAME:WUC
Invitation Letter Guests.doc
observ2,76700f862a0c241b8f4b754f76957bda,MD5,high,high,AV,FILENAME:essais~.swf|
NOTE:FWS type Flash file
observ4,5dda6d1446b3cdb0bd4a3f0adb85d030ff59e975,SHA1,low,high,AV,file_name.pdf
observ5,db435a875be456f088f11c579aa52f30bc83cfff272cfad5a3f6f4de74de0654,SHA256,high,high,AV,file_name.doc
observ7,http://somaliciousdomain.com/uploadfiles/upload/exp.swf?info=
789c333432d33b4d4b330d133b7b230b03000001b39033b&info=00840000
,URL,high,high,AV,IPV4ADDR:196.168.25.25
observ8,svr01.passport.ServeUser.com,Dpmain,low,high,AB,TCP:80|
IPV4ADDR:172.18.18.25|NOTE:Embedded EXE Remote C&C and Encoded Data
observ9,somaliciousdomain2.com,Domain,,low,AV,TCP:8080|IPV4ADDR:172.22.14.10
observ10,http://www.bogusdomain.com/search?q=%24%2B%25&form=MOZSBR&pc=
MOZI,URL,low,low,AB,IPV4ADDR:172.25.1.5
observ11,http://somebogussolution.com/register/card/log.asp?isnew=-1&LocalInfo=
Microsoft%20Windows%20XP%20Service%20Pack%202&szHostName=
ADAM-E512679EFD&tmp3=tmp3,URL,medium,,AB,
observ14,172.16.47.44,IP,high,medium,AB,TCP:8080
observ15,172.16.73.69,IP,medium,medium,AV,TCP:443|NOTE:Related to Flash
exploitation
observ16,abc@def.com,mail-to,,high,AV,"NOTE:truncated; samples have appended to
the subject the string ""PH000000NNNNNN"" where NNNNNN is a varying number"
observ34,stamdomain.com,domain,,AB,
observ35,stamdomain.com,mail-from,high,medium,AV,
observ37,xyz.com,mail-from,medium,medium,AB,
observ38,@xyz.com,mail-from,medium,medium,AB,
observ39,a@xyz.com,mail-from,medium,medium,AB,
```


Example of a STIX 1.0 XML Indicator File

```
<stix:STIX_Package
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:stix="http://stix.mitre.org/stix-1"
  xmlns:indicator="http://stix.mitre.org/Indicator-2"
  xmlns:stixVocabs="http://stix.mitre.org/default_vocabularies-1"
  xmlns:FileObj="http://cybox.mitre.org/objects#FileObject-2"
  xmlns:cybox="http://cybox.mitre.org/cybox-2"
  xmlns:cyboxCommon="http://cybox.mitre.org/common-2"
  xmlns:cyboxVocabs="http://cybox.mitre.org/default_vocabularies-2"
  xmlns:example="http://example.com/"
  xsi:schemaLocation="
    http://stix.mitre.org/stix-1 ../stix_core.xsd
    http://stix.mitre.org/Indicator-2 ../indicator.xsd
    http://stix.mitre.org/default_vocabularies-1 ../stix_default_vocabularies.xsd
    http://cybox.mitre.org/objects#FileObject-2 ../cybox/objects/File_Object.xsd
    http://cybox.mitre.org/default_vocabularies-2 ../cybox/cybox_default_vocabularies.xsd"
  id="example:STIXPackage-ac823873-4c51-4dd1-936e-a39d40151cc3"
  version="1.0.1">
  <stix:STIX_Header>
    <stix:Title>Example file watchlist</stix:Title>
    <stix:Package_Intent xsi:type="stixVocabs:PackageIntentVocab-1.0">Indicators -
Watchlist</stix:Package_Intent>
  </stix:STIX_Header>
  <stix:Indicators>
    <stix:Indicator xsi:type="indicator:IndicatorType" id="example:Indicator-611935aa-
4db5-4b63-88ac-ac651634f09b">
      <indicator:Type xsi:type="stixVocabs:IndicatorTypeVocab-1.0">File Hash
Watchlist</indicator:Type>
      <indicator:Description>Indicator that contains malicious file
hashes.</indicator:Description>
      <indicator:Observable id="example:Observable-c9ca84dc-4542-4292-af54-
3c5c914ccbbc">
        <cybox:Object id="example:Object-c670b175-bfa3-48e9-a218-aa7c55f1f884">
          <cybox:Properties xsi:type="FileObj:FileObjectType">
            <FileObj:Hashes>
              <cyboxCommon:Hash>
                <cyboxCommon:Type xsi:type="cyboxVocabs:HashNameVocab-1.0"
condition="Equals">MD5</cyboxCommon:Type>
                <cyboxCommon:Simple_Hash_Value condition="Equals" apply_
condition="ANY">0522e955aaee70b102e843f14c13a92c##comma##0522e955aaee70b102e843f14c13a92d##co
mma##0522e955aaee70b102e843f14c13a92e</cyboxCommon:Simple_Hash_Value>
              </cyboxCommon:Hash>
            </FileObj:Hashes>
          </cybox:Properties>
        </cybox:Object>
      </indicator:Observable>
    </stix:Indicator>
  </stix:Indicators>
</stix:STIX_Package>
```

Custom CSV Format

Custom Intelligence Feeds feature supports different kinds of CSV structure files.

Syntax Rules of Custom CSV files

- The supported observables are:
Name, Value, Type, Confidence, Severity, Product, Comment.
- Define the file's format, delimiter, and the comment lines to skip:

Use `--format` and specify your observables inside square brackets.

Use `--comment` for content to ignore in the original file.

Notes:

- Content specified within the square brackets of `--format` is fetched from the original file.
- Content inside the square brackets of `--comment` is ignored.

- The `Value` and `Type` observables are mandatory.
- The `Value` observable is specified based on its location in the original file:
`#<location_of_item>`.

For example:

If the `Value` observable is in the 3rd place in your CSV row, enter:

```
--format [value:#3]
```

- For all other observables, you can enter their location in the original file, or specify their value.

For example, if you want the value of the `Type` observable to be the domain specified in every CSV row, enter:

```
--format [type:domain]
```

- When the feed's resource is a remote source (transport equals HTTP or HTTPS), every time the feed is fetched, it parses based on the format that was specified for this feed.

Examples

Original CSV file is a list of domains

```
# This list consists of High Level Sensitivity website URLs
# Columns (tab delimited):
# (1) site
#
Site
4kqd3hniqgptupi3p.k7oudl.top
stggsjv6mqiibmax.torshop.li
grrgelpetkavanis4.pv
52ou5k3t73ypjiie.ie7t8k.top
ja:many.cu.ma
```

If you enter this command, the Security Gateway takes the domain specified in the first place of every row, and ignores anything that starts with `#` and the word `Site`.

```
ioc_feeds add --feed_name domain_list --transport https --
resource "https://isc.sans.edu/feeds/suspiciousdomains_High.txt"
--format [type:domain,value:1] --comment "#, Site"
```

This is the original CSV file

```
# category Descriptive tag name for this entry. For this report,
# the text sshpwauth will appear.
#
# A commented footer section shows an aggregate account of ASNs and
# addresses seen in the current report
#
3 | organization A | 18.30.10.26 | 2018-12-15 08:16:39 | sshpwauth
3 | organization B | 18.30.21.197 | 2018-12-28 17:43:41 | sshpwauth
17 | organization C | 128.46.80.71 | 2019-01-04 17:56:00 | sshpwauth
111 | organization D | 128.197.31.119 | 2019-01-10 03:12: 18 | sshpwauth
```

If you enter this command, the Security Gateway takes the IP address from the 3rd place in the row, takes the comment from the second place in the row, and ignores all content preceded by #:

```
ioc_feeds add --feed_name ip_list_with_spaces --transport local_
file --resource "/home/admin/ioc/ip_list_with_spaces.txt" --
format [value:#3,comment:#2,type:ip] --comment [#] --delimiter
" | "
```

Snort Format

This feature provides an ability to load Intelligence feeds in Snort format. With the Snort format, you can enhance your overall threat detection capabilities and control over your security operation

Snort rules use signatures to define attacks. The name of the imported Snort protection is the value of the **msg** field in the original Snort rule. The Snort feed size is limited to 3000 observables and 6000 rules in total. If the feed exceeds these limits, it is not loaded.

Check Point supports Snort 2.9 version and lower. Snort syntax is described in the official documentation at snort.org.

Snort Rule Syntax

```
<Action> <Protocol> <Source IP Address> <Source Port> <Direction>
<Destination IP Address> <Destination Port> (msg:"<Text>";
<Keyword>:"<Option>";)
```

SNORT rules have two logical parts: Rule Header and Rule Options.

■ SNORT Rule Header:

```
<Action> <Protocol> <Address> <Port> <Direction> <Address>
<Port>
```

■ SNORT Rule Options:

```
<keyword>:"<option>"
```

Example for a Snort file:

This Snort rule is designed to generate an alert whenever it detects HTTP traffic containing the string ".pdf", which indicates an attempt to transfer PDF files over HTTP, potentially for blocking or further investigation

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 80 (msg:"Block pdf files over HTTP"; content:".pdf");)
```

Parameter	Description
alert tcp	Specifies the protocol to inspect, in this case, TCP.
\$EXTERNAL_NET any -> \$HOME_NET 80	Defines the traffic flow direction. It instructs Snort to look for traffic from any external network (\$EXTERNAL_NET) to any port (any) on the local network (\$HOME_NET) on port 80 (HTTP).
(msg:"Block pdf files over HTTP"; content:".pdf");)	The rule itself. It consists of a descriptive message enclosed in double quotes (msg:"Block pdf files over HTTP") and a content match (content:".pdf") looking for the string ".pdf" in the HTTP traffic.

Supported SNORT Syntax

These are the generally supported syntax components. There are some limitations (see ["Unsupported SNORT Syntax" on page 418](#)).

Syntax components

Keyword	Description
length	Specifies the original length of the content that is specified in a protected_content rule digest
pcre	Lets you write rules with Perl-compatible regular expressions. Example: <pre>alert tcp any any -> any 80 (content: "/foo.php?id="; pcre: "/\s/foo.php?id=[0-9]{1,10}/iU";)</pre>
flowbits	Lets rules track states during a transport protocol session. Used in conjunction with conversation tracking from the Session preprocessor. Example: <pre>alert tcp \$HTTP_SERVERS any -> \$EXTERNAL_NET 21 (msg: "Does not match state in FTP path"; flow: established, to_server; content: "targetfile"; nocase; fast_pattern; flow bits: isset, INFTEPPATH; no_match;)</pre>

Keyword	Description
byte_test	Tests a byte field for a specific value (with operator). Example: <pre>alert udp \$EXTERNAL_NET any -> \$HOME_NET 123 (msg: "Header length longer than maximum"; content: "length 3d "; byte_test: 4, >, 1024, 1, relative;)</pre>
byte_jump	Lets you write rules that skip over specific portions of the length-encoded protocols and perform detection in very specific locations. Example: <pre>alert udp any any -> any 123 (msg: "Check for 0001 after 0123"; content: " 30 31 32 33 "; byte_jump: 4,4, relative; content: " 30 30 30 31 "; distance: 1; relative;)</pre>
isdataat	Verifies that the payload has data at a specified location. Example: <pre>alert tcp \$EXTERNAL_NET any -> \$HTTP_SERVERS \$HTTP_PORTS (msg: "\r\n\r\nHas 300 byte after"; flow: established, to_server; content: " 0a 0d 0a 0d "; isdataat: 300,relative; sid:11111111;)</pre>
no_match	Does not block traffic even if the rule matches. Used with the "flow bits" key word to set a flag without performing a block. Example: <pre>alert tcp \$HTTP_SERVERS any -> \$EXTERNAL_NET 21 (msg: "Does not match state in FTP path"; flow: established, to_server; content: "targetfile"; nocase; fast_pattern; flow bits: isset,INFTPPATH;no_match; sid: 55555555;)</pre>

- Supported Content Keyword Modifiers: "nocase", "rawbytes", "depth", "offset:", "distance:", "within", "urilen"
- Supported Threshold Rule Types - Threshold, Both (Limit is not supported.)
- Supported Macros - HTTP_PORTS (Interpreted as 80 and 8080 ports.)

 **Note** - Make sure that SNORT Rules with the same **flowbits** flag have the same content in the **msg** field. Otherwise, they will not be under the same protection.

Debugging:

The `$FWDIR/log/SnortConvertor.elg` file on the Management Server contains is updated with the debug messages from the last SnortConvertor run import of SNORT rules.

To find failed rule debugs in this file, search for: `Failed to convert rule`

Unsupported SNORT Syntax

This syntax is not supported and does not convert

- PCRE modifiers: 'G', 'O', 'A'
- PCRE regular expression with lookahead assertion: `?!`
- Using `byte_test` keyword with operator not in: `<`, `>`, `=`, `&`, `^`
- `http_method` is not supported if it is the only http modifier type in the SNORT Rule
- Protocols: `icmp`, `ip` ("all" is interpreted as UDP and TCP protocols)
- SNORT Rule without content keyword
- All `PORT` macros, except `HTTP_PORTS`
- Specification of source port (only "any" is supported)
- Specification of destination port "any" (you must specify an exact destination port number, or a range of destination port numbers).

The conversion will change the behavior of these macros and syntax.

- Specification of IP Addresses - Enforced on all IP Addresses
- `HOME_NET` macro - Interpreted as "any" IP Addresses
- `EXTERNAL_NET` macro - Interpreted as "any" IP Addresses
- `HTTP_SERVERS` macro - Interpreted as "any" IP Addresses

These combinations of keywords and modifiers are implemented differently in the IPS blade as SNORT protection rules than in SNORT Rules.



Best Practice - Test them before activating them in a production environment.

Keywords and modifiers

- `rawbytes` content
- "B" PCRE modifiers with `http_uri` content
- "U" PCRE modifiers

- **With HTTP content or PCRE modifiers**

- `http_raw_uri` content or "I" PCRE modifiers
- `http_stat_msg` content or "Y" PCRE modifiers
- `http_stat_code` content or "S" PCRE modifiers

- **Without HTTP content or PCRE modifiers**

- Two or more uses of `http_header` content or "H" PCRE modifiers
- Two or more uses of `http_raw_header` content or "D" PCRE modifiers

- **With 'depth' or 'offset' content and HTTP content that is one of these on the same content keyword, or '^' (carat) in 'pcre' with one of these HTTP 'pcre' modifiers on the same 'pcre' keyword**

- `http_header` content or "H" PCRE modifiers
- `http_raw_header` content or "D" PCRE modifiers
- `http_stat_msg` content or "Y" PCRE modifiers
- `http_stat_code` content or "S" PCRE modifiers
- `http_uri` content or "U" PCRE modifiers

- **Use of `depth` or `offset` content, or ^ (carat) in PCRE, without any http content, and with destination ports that are not `HTTP_PORTS` macro**

- **`http_client_body` content or "P" PCRE modifier**

- **A PCRE keyword with { } (curly braces) quantifier**

- **Use of both content and `byte_test` keywords**

- **`http_header` content modifiers or "H" PCRE modifiers enforced only on raw http data (not decoded and normalized header data)**

- **Use of the `urilen` keyword, except in a SNORT Rule that has only `http_uri` and "U" PCRE modifiers, or `http_raw_uri` content modifier and I PCRE modifiers:**

- If the SNORT Rule has only `http_uri` content or "U" PCRE modifiers, the size will be of the decoded and normalized buffer.
- If the SNORT Rule has only `http_raw_uri` content or "I" PCRE modifiers, the size will be of the raw uri buffer.

SSL Services

In addition to the conventional metadata service options, Check Point supports additional keywords specifically for SSL traffic.

Snort rules for SSL traffic can be defined using the metadata keyword.

In the **Snort rule** options add:

```
metadata: service <SSL service>;
```

Example

```
alert tcp any any -> any 443 (msg:"Fake SSL Certificate";
content:"|08 e4 98 72 49 bc 45 07 48 a4 a7 81 33 cb f0 41 a3 51 00
33|"; metadata: service sslHello;)
```

Options for <ssl service>

Service	Description
sslHello	The sslHello service will search the Client Hello or Sever Hello depending on the flow.
sslCertificate	The sslCertificate service will search the Client Certificate or Sever Certificate depending on the flow.
sslKeyx	The sslKeyx service will search the Client Key Exchange or Sever Key Exchange depending on the flow.
sslHeartbeat	The sslHeartbeat will search the SSL heartbeats.
sslCiphersuite	The sslCiphersuite will search the Cipher Suite sent by the client.

When you use the `sslHello`, `sslCertificate`, or `sslKeyx` services, it is necessary to define a flow direction as either `"flow: to_server"` or `"flow: from_server"`.



Note - These services and content modifiers are unique to Check Point and will not be supported by other SNORT engines.

Importing External Custom Intelligence Feeds in SmartConsole

Step	Instructions
1	In SmartConsole, go to the applicable Threat Prevention profile > Indicators > Activation > make sure that Enable indicator scanning is selected.
2	In SmartConsole, go to Security Policies > Threat Prevention > Custom Policy > Custom Policy Tools > Indicators. If you are working with Autonomous Threat Prevention, go to Security Policies > Threat Prevention > Autonomous Policy > Autonomous Policy Tools > Indicators.
3	Click New and select New IoC Feed. The New IoC Feed configuration window opens.
4	In the top field, enter a unique object name.
5	In the Action field, select the applicable action: For the Check Point / STIX or custom CSV formats, select one of these actions: ▪ Prevent - Threat Prevention Software Blades block the observable. ▪ Detect - Threat Prevention Software Blades create a log entry and let the detected observable pass through. ▪ Inactive - Disables this feed (Security Gateways ignore it). For the Snort format, select one of these actions: ▪ According to Profile - Enforcement of the feed according to profile settings. ▪ Inactive - Disables this feed (Security Gateways ignore it).
6	In the Feed URL field, enter the full URL, including the <code>http://</code> or <code>https://</code> prefix.

Step	Instructions
7	From the Format drop-down menu, select the applicable format (see sk132193): ▪ Check Point format/STIX - Configure the applicable feed parsing settings. ▪ Custom CSV - Configure the applicable feed parsing settings. ▪ Snort - Configure the applicable feed parsing settings. To use the Snort format, you must first: a. Enable the IPS Software Blade. b. Install the Threat Prevention policy. Configure these settings: • In Ignore lines with prefix - Use the default prefix or define a different one. • Enter the feed's Performance Impact, Severity and Confidence levels. These definitions determine the profile action that is applied to the feed. For example, if you set the feed's severity as high, and the profile is configured to prevent high-severity threats, the traffic will be blocked.
8	Expand the Advanced section (click the ^ icon on the right).
9	In the Authentication section, enter the applicable username and password, if the external feed requires authentication.
10	In the Network section, select Use gateway proxy for connection , if the Security Gateway accesses the external feed through a proxy server.
11	Make sure that the Security Gateway can access the feed: a. Click Test Feed. b. From the Select the Security Gateway drop-down menu, select the applicable Security Gateway. c. Click Test Feed. d. Click Close.  Note - The Select the Security Gateway menu does not show Virtual Switches.
12	Click OK. The new indicator appears on the Indicators page.

Step	Instructions
13	By default, the Security Gateway fetches the configured feeds every 5 minutes and enforces them immediately. To change the fetching interval: - From the left navigation panel, click Manage & Settings > Blades > Threat Prevention > Advanced Settings. - From the left tree, click External Feed. - Configure the applicable interval. - Click OK.
14	Install the Threat Prevention policy.

Watch the video

UserCheck in the Threat Prevention Policy

This section describes how to configure and use UserCheck.

When you enable the UserCheck feature, the Security Gateway sends messages to users about possible non-compliant behavior or dangerous Internet browsing, based on the rules an administrator configured in the Security Policy. This helps users prevent security incidents and learn about the organizational security policy. You can develop an effective policy based on logged user responses. Create UserCheck objects and use them in the Rule Base, to communicate with the users.

These Software Blades support the UserCheck feature:

- Data Loss Prevention
- Access Control:
 - Application Control
 - URL Filtering
 - Content Awareness
- Threat Prevention:
 - Anti-Bot
 - Anti-Virus
 - Threat Emulation
 - Threat Extraction
 - Zero Phishing

Getting Started with UserCheck for Threat Prevention Software Blades:

1. In the Security Gateway / Cluster object:
 - a. Enable the applicable Threat Prevention Software Blades.
 - b. Configure the applicable UserCheck settings.
See ["Configuring UserCheck" on page 426](#).
 - c. Optional: Download the UserCheck Client and install it on endpoint computers.
See the [R82.10 Security Gateway Guide](#) > Chapter "UserCheck Client".
2. Optional: In the **Global Properties**, configure the applicable UserCheck settings.
3. Configure the applicable UserCheck Interaction Objects.

See ["UserCheck Interaction Objects for Threat Prevention Software Blades" on page 430](#).

4. Configure the applicable Threat Prevention Profiles and Threat Prevention Policy.

See:

- ["The Threat Prevention Policy" on page 43](#).
- ["Configuring Autonomous Threat Prevention" on page 293](#).

In Threat Prevention Profiles > click the applicable Software Blade page > in the section **UserCheck Settings**, click the applicable field **Prevent** or **Ask** > select the required UserCheck Interaction object.

5. Install the Threat Prevention Policy on the Security Gateway / Cluster object.
6. Additional Configuration:
 - ["Localizing and Customizing the UserCheck Portal" on page 440](#)

Configuring UserCheck

Enable or disable UserCheck directly on the Security Gateway. When UserCheck is enabled, the user's Internet browser shows the UserCheck messages in a new window. If users connect to the Security Gateway remotely, set the internal interface of the Security Gateway (on the **Topology** page) to be the same as the **Main URL** for the UserCheck Portal.

To configure UserCheck on a Security Gateway

Step	Instructions
1	From the left navigation panel, click Gateways & Servers .
2	Double-click the Security Gateway / Cluster object.
3	In the left panel, click UserCheck .
4	Select Enable UserCheck for active blades .
5	In the UserCheck Web Portal section, the Main URL field shows the primary URL for the web portal that shows the UserCheck notifications. You can use the suggested Main URL or manually enter a different Main URL .
6	Optional: Click Aliases to add URL aliases that redirect different hostnames to the Main URL . For example: <code>usercheck.mycompany.com</code> The aliases must be resolved to the portal IP address on the corporate DNS server.
7	In the Certificate section, click Import to import a certificate that the portal uses to authenticate to the Security Management Server. By default, the portal uses a certificate from the Check Point Internal Certificate Authority (ICA). This might generate warnings if the user browser does not recognize Check Point as a trusted Certificate Authority. To prevent these warnings, import your own certificate from a recognized external authority.  Note - After you download your certificate, you can click Replace to replace it with a different certificate, and click View to see the certificate information.

Step	Instructions
8	In the Accessibility section, click Edit to configure interfaces on the Security Gateway through which the portal can be accessed. These options are based on the topology configured in the Security Gateway object. You must configure the topology settings on the Network Manegment page. Select the applicable option when the Security Gateway must send users to the UserCheck Portal based on how they connect: ▪ Through all interfaces ▪ Through internal interfaces (default) • Including undefined internal interfaces • Including DMZ internal interfaces • Including VPN encrypted interfaces (default) Applies to interfaces used for establishing route-based VPN tunnels (VTIs) ▪ According to the Firewall Policy Select this option if there is an Access Control rule that determinces who can access the UserCheck Portal. If the Main URL is set to an external interface, you must set the Accessibility to one of these: ▪ Through all interfaces You must select this option if this is a VSX Gateway / VSX Cluster. ▪ According to the Firewall Policy
9	UserCheck Client - The UserCheck Client is installed on user devices to communicate with the Security Gateway and show UserCheck Interaction notifications to users. ▪ Activate UserCheck Client support This enables UserCheck through the UserCheck Client. ▪ Download Client This downloads the installation file for the UserCheck Client.  Note - The link is not active until the UserCheck Portal is up. See the R82.10 Security Gateway Guide > Chapter "UserCheck Client".

Step	Instructions										
10	In the Mail Server section, configure a mail server for UserCheck. This server sends notifications to users that the Security Gateway cannot notify using other means, if the server knows the email address of the user. For example, if a user sends an email which matched on a rule, the Security Gateway cannot redirect the user to the UserCheck Portal because the traffic is not HTTP. If the user does not have a UserCheck Client, UserCheck sends an email notification to the user. ▪ Use the default settings Click the link to see which mail server is configured. ▪ Use specific settings for this gateway Select this option to override the default mail server settings. ▪ Send emails using this mail server Select a mail server from the list, or click New and define a new mail server.										
11	Click OK to close the Security Gateway / Cluster object.										
12	If there is encrypted traffic through an internal interface, add a new rule to the Firewall Layer of the Access Control Policy. Example rule: <table><tr><th>Source</th><th>Destination</th><th>VPN</th><th>Services & Applications</th><th>Action</th></tr><tr><td>Any</td><td>Security Gateway on which UserCheck Client is enabled</td><td>Any</td><td>UserCheck</td><td>Accept</td></tr></table>	Source	Destination	VPN	Services & Applications	Action	Any	Security Gateway on which UserCheck Client is enabled	Any	UserCheck	Accept
Source	Destination	VPN	Services & Applications	Action							
Any	Security Gateway on which UserCheck Client is enabled	Any	UserCheck	Accept							

Step	Instructions
13	Install the Access Control Policy to enable UserCheck for these Access Control Software Blades. ■ Application Control ■ URL Filtering ■ Content Awareness ■ Data Loss Prevention Install the Threat Prevention Policy to enable UserCheck for these Threat Prevention Software Blades: ■ Anti-Bot ■ Anti-Virus ■ Threat Emulation ■ Threat Extraction ■ Zero Phishing

UserCheck CLI

See the [R82.10 CLI Reference Guide](#) - Chapter *Security Gateway Commands* - Section *usrchk*.

UserCheck Interaction Objects for Threat Prevention Software Blades

This section describes how to configure UserCheck Interaction Objects.

UserCheck Interaction Objects add flexibility and give the Security Gateway a mechanism to communicate with users.

You use the UserCheck Interaction Objects in the Threat Prevention Policy to:

- Help users with decisions that can be dangerous to the organization security.
- Share the organization changing internet policy for web applications and sites with users, in real-time.

 **Note** - You create and edit UserCheck Interaction objects for the Access Control policy only in SmartConsole.

UserCheck Interaction Action Types

Action Type	Description
Approve	Users get a message that the company policy approved their access to the requested site. See "Selecting \"Approved\" and \"Cancel\" UserCheck Messages\" on page 436.
Ask	Users get a message that asks if they want to continue to the requested site. UserCheck Interaction with this action type appear in Threat Prevention Profiles > on the applicable Software Blade pages > in the section UserCheck Settings > in the menu Ask .
Block	Users get a message that the company policy blocked access to the requested site. UserCheck Interaction with this action type appear in Threat Prevention Profiles > in the applicable Software Blade pages > in the section UserCheck Settings > in the menu Prevent .
Cancel	After a user gets an Inform or Ask notification and clicks Cancel , they get a message that they cancelled their request to access a site. See "Selecting \"Approved\" and \"Cancel\" UserCheck Messages\" on page 436.
Inform	Users get a message about the company policy for the requested site and they must click OK to continue to the site.

Default UserCheck Interaction Objects for Threat Prevention

Explanation

Notes:

- These default objects open in the read-only view.
- You can right-click each default object and click **Clone**.
- To preview a default UserCheck Interaction object, click it.

1. From the left navigation panel, click **Security Policies**.
2. In the top panel, click **Threat Prevention**.
3. In the bottom panel, click **Custom Policy Tools**, click **UserCheck**.
4. These are the default UserCheck Interaction objects for Threat Prevention:

Default UserCheck Interaction Object	Action Type
Anti-Bot Blocked	Block
Anti-Virus Blocked	Block
Cancel Page Threat Prevention	Cancel
Company Policy Anti-Bot	Ask
Company Policy Anti-Virus	Ask
Company Policy Threat Emulation	Ask
Company Policy Threat Extraction	Ask
Company Policy Zero Phishing	Ask
Threat Emulation Blocked	Block
Threat Extraction Success Page	Approve
Zero Phishing Blocked	Block

Creating New UserCheck Interaction Objects for Threat Prevention

Procedure

1. From the left navigation panel, click **Security Policies**.
2. In the top panel, click **Threat Prevention**.

3. In the bottom panel **Custom Policy Tools**, click **UserCheck**.
4. From the top toolbar, click **New** > click the applicable UserCheck Interaction:

 **Note** - You can right-click a default UserCheck Interaction object > click **Clone**, and then edit the cloned object as required.

- **Ask UserCheck**

If you select this UserCheck Interaction object in a Threat Prevention profile in the applicable Software Blade, then internal users get a message that asks them if they want to continue with the request or not.

To continue with their request, users are expected to enter a reason.

- **Inform UserCheck**

If you select this UserCheck Interaction object in a Threat Prevention profile in the applicable Software Blade, then internal users get an informative message.

Users can continue or cancel their request.

- **Block UserCheck**

If you select this UserCheck Interaction object in a Threat Prevention profile in the applicable Software Blade, then internal users get a message that their request was blocked.

5. **Optional:** In the top corner, on the right side of the icon, click the downward arrow and select the desired color.
6. In the top field, enter an object name.
7. **Optional:** In the **Comment** field, enter the applicable text.
8. In the left panel, click the **Message** page:
 - a. To select a language for the message (English is the default), above the message section, click the **Languages** button > select the required languages > click **OK**.

 **Note** - The corresponding tab appears for each language you select.

- b. To insert a variable field into the message, from the top toolbar, click **Insert Field** and click the applicable variable.

 Notes:

- When the **Ask**, **Inform**, or **Block** action occurs, the UserCheck Portal and UserCheck Client replaces these variables with applicable values in the message.
- To resolve the **Username** variable, you must enable the **Identity Awareness** Software Blade and configure the required settings. See the [R82.10 Identity Awareness Administration Guide](#).

- c. To add your logo, in the message body, click **Add Logo** > click  > click **Add new image** > browse to the required image file and select it > click **Open**.

 Notes:

- The height of the image must be 176 pixels or less.
- The width of the image must be 52 pixels or less.

- d. To insert special fields for user input, from the top toolbar, click **Insert User Input** and click the applicable option.

 Important:

- To change the view to raw HTML code, click **Source** at the top.
To go back, click **Design**.
- You can preview the final message after you save this object.

9. In the left panel, click the **Settings** page:

- a. In the **Languages** section:

Select the language for the UserCheck page, if a user did not configure a default language in their web browser.

b. In the **Fallback Action** section:

 **Note** - This section appears only in the UserCheck Interaction object of the type **Ask** and **Inform**.

Select the UserCheck action, if it is not possible to show a UserCheck notification on a user's computer:

Fallback Action	Behavior
Allow	Allows the user to access the website or application. The UserCheck Client (if installed) shows the notification.
Drop	The Security Gateway tries to show the notification in the application that caused the notification. If it cannot, and the UserCheck Client is installed, the UserCheck Client shows the notification. Blocks the website or application, even if the user does not see the notification.

c. In the **Conditions** section:

 **Note** - This section appears only in the UserCheck Interaction object of the type **Ask** and **Inform**.

Select the required condition that users must meet to send their data through the Security Gateway:

Condition	Behavior
User accepted and selected the confirm checkbox	This applies if on the Message page, from the Insert User Input menu you inserted the element Confirm Checkbox . In the message, users must select the checkbox before they can access the application.
User filled some textual input	This applies if on the Message page, from the Insert User Input menu you inserted the element Textual Input . Users must enter text in the text field before they can access the application. For example, you might require that users to enter an explanation for use of the application.

10. Click **OK**.

11. Preview this UserCheck Interaction in the right pane in each available language and each available view:
 - **Regular View**
 - **Mobile**
 - **Agent**
 - **Email**
 - **R80.10 and Higher Gateways**
 - **Earlier Gateways**
12. Install the Threat Prevention Policy.

Selecting "Approved" and "Cancel" UserCheck Messages

Procedure

Step	Instructions
1	From the left navigation panel, click Manage & Settings .
2	In the top panel, click Blades .
3	In the Threat Prevention section, click Advanced Settings .
4	In the left panel, click UserCheck .
5	In the field Approved Page field, select the applicable UserCheck Interaction object. This field applies only to the Threat Extraction Software Blade. When Threat Extraction sends you a clean file, you can select to download the original file. If a user chooses to download the original file, the user gets a UserCheck success message. If a user chooses not to download the original file, the user gets a UserCheck cancel message.
6	In the field Cancel Page field, select the applicable UserCheck Interaction object. This field applies to all the Threat Prevention Software Blades. This message appears after a user chooses not to receive access to a web page or a file.
7	Click OK .
8	Install the Access Control Policy.
9	Install the Threat Prevention Policy.

Send Email Notifications in Plain Text

Not all email clients can handle emails in rich text or HTML format.

To accommodate such clients, you can configure the Security Gateway to send email notification in plain text without images, in addition to the HTML format.

The user's email client decides which format to show.

1. Connect to the command line to the Security Gateway / each Cluster Member / Scalable Platform Security Group.
2. Log in to the Expert mode.
3. Back up the configuration file:

- On a Security Gateway / each Cluster Member:

```
cp -v $FWDIR/conf/usrchkd.conf{,_BKP}
```

- On a Scalable Platform Security Group:

```
g_all cp -v $FWDIR/conf/usrchkd.conf{,_BKP}
```

4. Edit the configuration file:

```
vi $FWDIR/conf/usrchkd.conf
```

5. Change the value of the applicable parameter:

from

```
:send_emails_with_no_images (false)
```

to

```
:send_emails_with_no_images (true)
```

6. Save the changes in the file and exit the editor..
7. On a Scalable Platform Security Group, copy the modified file to all Security Group Members:

```
asg_cp2blades $FWDIR/conf/usrchkd.conf
```

8. Kill the `usrchkd` process to load the new configuration:

- On a Security Gateway / each Cluster Member:

```
killall userchkd
```

- On a Scalable Platform Security Group:

```
g_all killall userchkd
```

The Security Gateway / Cluster Member / Security Group automatically restarts this process.

Localizing and Customizing the UserCheck Portal

For more information, see [sk83700](#).

Send Email Notifications in Plain Text

Not all emails clients can handle emails in rich text or HTML format.

To accommodate such clients, you can configure the Security Gateway to send email notification in plain text without images, in addition to the HTML format.

The user's email client decides which format to show.

1. Connect to the command line to the Security Gateway / each Cluster Member / Scalable Platform Security Group.
2. Log in to the Expert mode.
3. Back up the configuration file:

- On a Security Gateway / each Cluster Member:

```
cp -v $FWDIR/conf/usrchkd.conf{,_BKP}
```

- On a Scalable Platform Security Group:

```
g_all cp -v $FWDIR/conf/usrchkd.conf{,_BKP}
```

4. Edit the configuration file:

```
vi $FWDIR/conf/usrchkd.conf
```

5. Change the value of the applicable parameter:

from

```
:send_emails_with_no_images (false)
```

to

```
:send_emails_with_no_images (true)
```

6. Save the changes in the file and exit the editor..
7. On a Scalable Platform Security Group, copy the modified file to all Security Group Members:

```
asg_cp2blades $FWDIR/conf/usrchkd.conf
```

8. Kill the `userchkd` process to load the new configuration:

- On a Security Gateway / each Cluster Member:

```
killall userchkd
```

- On a Scalable Platform Security Group:

```
g_all killall userchkd
```

The Security Gateway / Cluster Member / Security Group automatically restarts this process.

Localizing and Customizing the UserCheck Portal

For more information, see [sk83700](#).

Cyber Attack View - Gateway

The **Cyber Attack View - Gateway** view shows cyber-attacks against your network based on attack vectors.


This view lets you pinpoint events that require attention.

Main Screen - SmartConsole


To open this view:

Step	Instructions
1	Connect with SmartConsole to your Security Management Server or Domain Management Server.
2	From the left navigation panel, click Logs & Events.
3	At the top, click the + tab. The New Tab tab opens.
4	In the left tree, click Views .
5	In the top search field, enter the word cyber .
6	The list of the views shows the available Cyber Attack View views.
7	Double-click the Cyber Attack View - Gateway (or select it and click Open).

Example: SmartConsole > New Tab > Logs & Events:

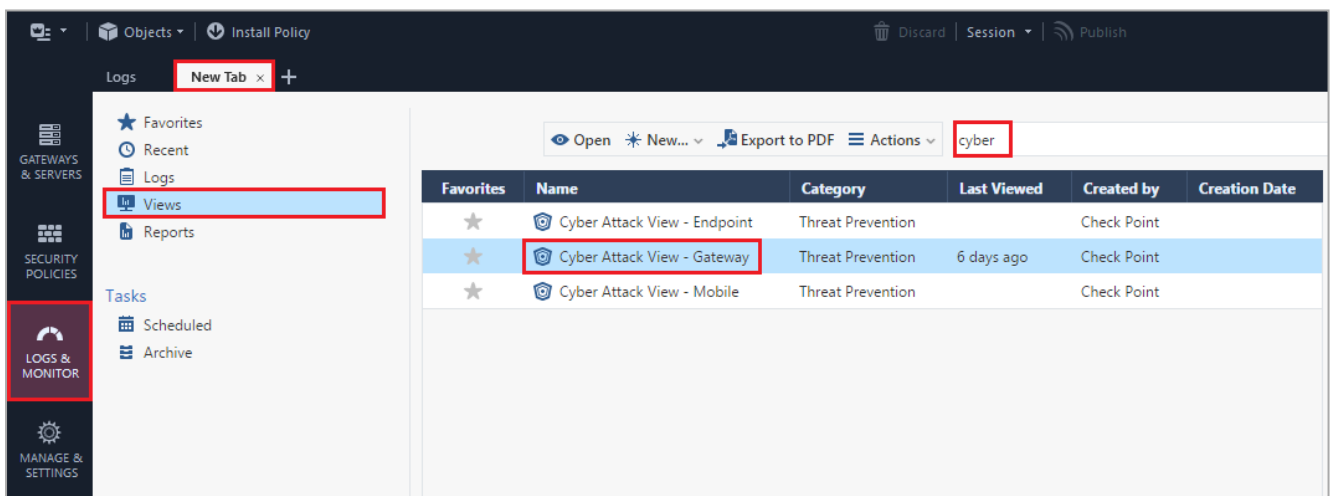

Example: Cyber Attack View - Gateway

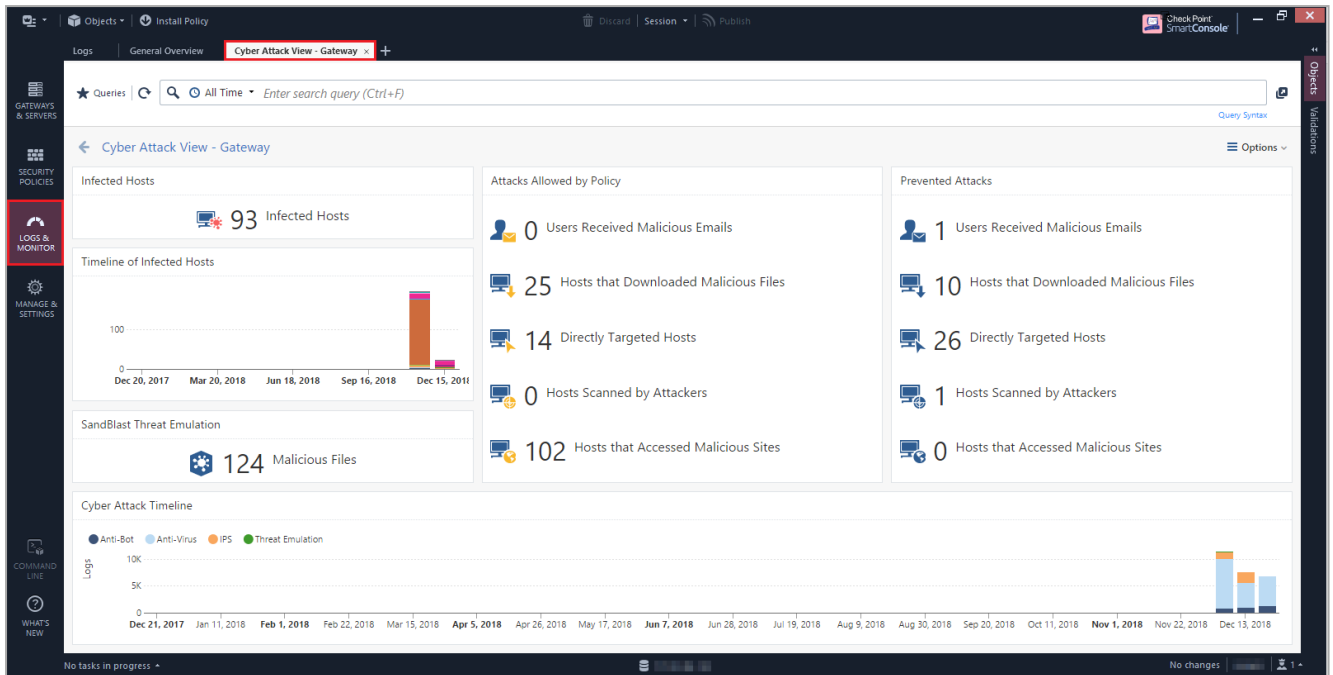

All the correlated events are tagged with a **Severity** and **Confidence Level** of **Medium** and above (Check Point assigns these tags, and users cannot change them). The queries that run in the background show events with these tags.


All the other events show in the **Additional Events** section.

Main Screen - SmartView


To open this view:

Step	Instructions
1	In your web browser, connect to the SmartView on your Security Management Server or Domain Management Server: <pre>https://<IP Address of Management Server>/smartview</pre>
2	At the top, click the + tab. The New Tab Catalog tab opens.
3	In the left tree, click Views .
4	In the top search field, enter the word cyber .
5	A list shows the available Cyber Attack View views.
6	Double-click the Cyber Attack View - Gateway (or select it and click Open).

Example: SmartView > New Tab Catalog > Views

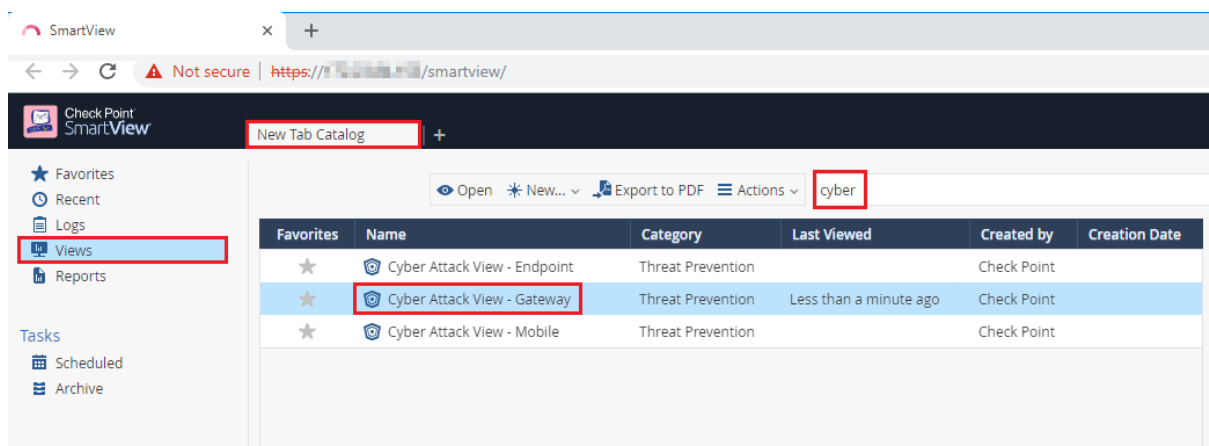

Example: Cyber Attack View - Gateway

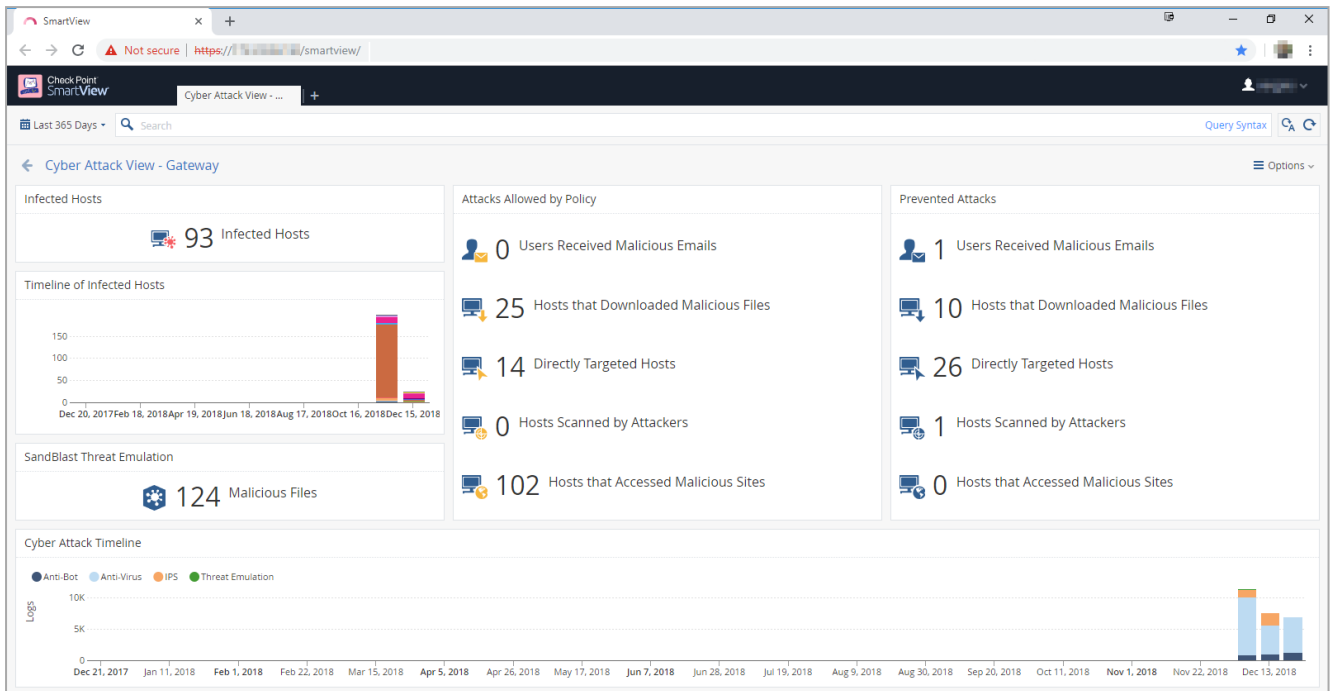

All the correlated events are tagged with a **Severity** and **Confidence Level** of **Medium** and above (Check Point assigns these tags, and users cannot change them). The queries that run in the background show events with these tags.

All the other events show in the **Additional Events** section.

Default Query

The view runs this query and presents the data in different widgets:

```
Pre-defined Filter > Log Type Filter  
Product Family > Equals > Threat  
Severity > Equals > Medium, High, Critical  
Confidence Level > Equals > Medium, Medium-High, High
```

Some widgets add their own filters to the default query.

Default widgets

These are the default widgets in this view:

Widget	Type	Description
Infected Hosts	Infographic	Shows the number of hosts in the network infected with malware over the selected report period.
Timeline of Infected Hosts	Timeline	Shows the dates and the number of logs for hosts in the network infected with malware over the selected report period.
Attacks Allowed by Policy	Infographic	Shows the number of attacks in different attack vectors that the current Security Policy allowed over the selected report period.
Prevented Attacks	Infographic	Shows the number of attacks in different attack vectors that the current Security Policy prevented over the selected report period.
SandBlast Threat Emulation	Infographic	Shows the number of blocked malicious files over the selected report period.
Cyber Attack Timeline	Timeline	Shows the number of logs from different Software Blade (Anti-Bot, Anti-Virus, IPS, and Threat Emulation) over the selected report period.

Editing the View and Widgets

To edit the view and its widgets, click **Options > Edit** in the top right corner.

On the top toolbar, these buttons become available:

Icon	Button	Description
 Add Widget	Add Widget	Add a new widget to this view. Available widget types are: ■ Table ■ Chart ■ Timeline ■ Map ■ Infographic ■ Container ■ Rich Text
 Undo	Undo	Undo the last action.
 Redo	Redo	Repeat the last action.
 Discard	Discard	Discard all changes and exit the edit mode.
 Done	Done	Save all changes and exit the edit mode.

In the top right corner of every widget, these buttons show according to the widget type:

Icon	Button	Description
 Remove	Remove	Deletes an element (that you added with the Add Widget button) from this widget.
 Add	Add	Adds more elements to this widget: ■ Chart ■ Timeline ■ Map ■ Infographic ■ Rich Text

Icon	Button	Description
	Chart Type	Selects the chart type: ▪ Columns ▪ Bars ▪ Pie ▪ Area ▪ Line
	Edit Filter	Edits the query filter.
	Settings	Configures the settings for this widget (Container) and for the elements of this widget. For the widget's Container, you can configure: ▪ Title ▪ Description ▪ Layout (Horizontal, Vertical, Grid, Tabs) For widget of type Infographic, you can configure: ▪ Title ▪ Field Name ▪ Filter ▪ Icon (search or hover the mouse cursor to see the tooltip with an icon's name) ▪ Primary Text (appears on the right of the icon) ▪ Secondary Text (appears in smaller font under the Primary Text) ▪ Icon template (controls the shape and size of the icon and whether to show the counter) ▪ Horizontal Alignment (Left, Center, Right) ▪ Vertical Alignment (Top, Middle, Bottom) ▪ Style (Normal, Small) For widget of type Table, you can configure: ▪ Title ▪ Description ▪ Table Type (Statistical Table, Logs Table) ▪ Columns (which log fields to analyze and how to present their data)

Icon	Button	Description
		For widget of type Chart, you can configure: ■ Title ■ Description ■ Chart Type ■ Values for Y-axis ■ Values for X-axis ■ Sort order ■ Number of values to show ■ Number of samples to show ■ Axis titles ■ Legend
	Remove Widget	Deletes the widget from the view.

To change the size of a widget:

1. Left-click and hold in the bottom right corner of the widget.
2. Drag the corner to the desired position.
3. Release the mouse button.

To restore the default settings:

In the top right corner, click **Options > Restore Defaults**.

Working with Widgets

Working with widgets of type Infographic

- Double-click anywhere on the headline or the icon.
- Right-click anywhere on the headline or the matching icon and click **Drill Down**.

Working with widgets of type Table:

- Click once on the column header to sort in ascending or descending order.
- Hover the mouse cursor over a value to see a full-text tooltip.
- To open the next drill-down level, you can:
 - Double-click on a row inside the table.
 - Right-click on a row inside the table and click **Drill Down**.
- To filter the applicable logs only for a specific value, right-click on the value inside the table and click **Filter: "<VALUE>"**.
- To filter a specific value out of the applicable logs, right-click on the value inside the table and click **Filter Out: "<VALUE>"**.

Working with widgets of type Chart:

- Hover the mouse cursor over the chart area to see a full-text tooltip.
- To open the next drill-down level, you can:
 - Double-click on a chart bar inside the graph.
 - Right-click on a chart bar inside the graph and click **Drill Down**.
- To filter the applicable logs only for a specific value, right-click on the value inside the table and click **Filter: "<VALUE>"**.
- To filter a specific value out of the applicable logs, right-click on the value inside the table and click **Filter Out: "<VALUE>"**.

Working with widgets of type Timeline:

- Hover the mouse cursor over the chart area to see a full-text tooltip.
- To open the next drill-down level, you can:
 - Double-click on a chart bar inside the graph.
 - Right-click on a chart bar inside the graph and click **Drill Down**.

- In the legend, you can:
 - Double-click on a specific category to show only its data on the graph
 - Single-click on a specific category to remove its data from the graph
 - Single-click on the same specific category to show its data again on the graph

If you disabled two or more specific categories in the legend, then to enable all categories again:

- Single-click on each disabled category until the legend shows all categories as enabled
- Double-click a specific category to show only its data on the graph and then single-click on the same specific category

Working with widgets of type Map:

- Hover the mouse cursor over the circled country to see a full-text tooltip.
- To open the next drill-down level, you can:
 - Double-click on a circled country inside the map.
 - Right-click on a circled country inside the map and click **Drill Down**.
- To filter the applicable logs only for a specific value, right-click on the circled country and click **Filter: "<VALUE>"**.
- To filter a specific value out of the applicable logs, right-click on the circled country and click **Filter Out: "<VALUE>"**.

Infected Hosts

Description

This widget shows the number of hosts in the network infected with malware over the selected report period.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

The Security Gateway treats a host as infected when it detects an outbound malicious communication or propagation event (lateral movement) from that host.

Anti-Bot and **IPS** events show this malware communication. The events shown have a **Severity** and **Confidence Level** of **Medium** and above.

Example:




To open the next drill-down level, double-click a headline or matching icon.

The drill-down view shows summarized data about infected hosts on your internal network.

Drill-Down View

This is an obfuscated example of the drill-down view:

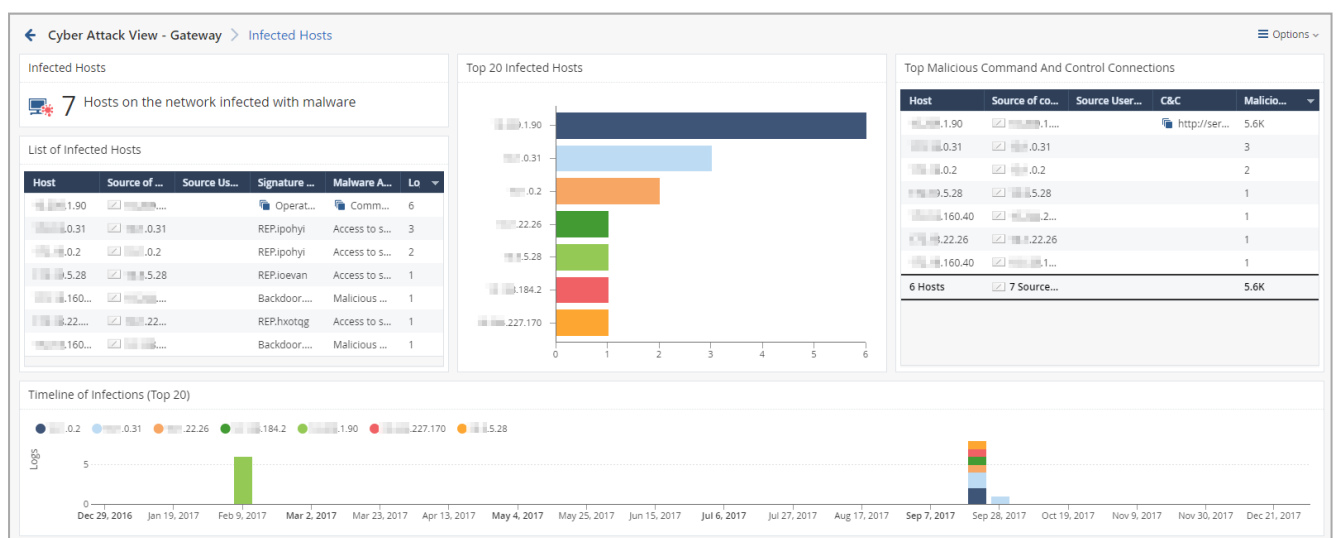

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Infected Hosts	Infographic	Shows the number of hosts on the network infected with malware.
Top 20 Infected Hosts	Chart	Shows top hosts (based on the logs count) that connected to Command and Control (C&C) servers. Shows: ■ The source IP addresses of the top 20 infected hosts ■ The number of detected malicious connections Different colors show different infected hosts.
Top Malicious Command And Control Connections	Table	Shows top hosts (based on the connection rates) that connected to Command and Control (C&C) servers. Shows: ■ Hostnames of the infected hosts ■ Source IP addresses of the infected hosts ■ Source usernames ■ C&C server IP addresses ■ Number of malicious C&C connections
List of Infected Hosts	Table	Shows the list of infected hosts. Shows: ■ Hostnames of the infected hosts ■ Source IP addresses of the infected hosts ■ Source usernames ■ Signature names of the detected malware (based on Check Point ThreatWiki and Check Point Research) ■ Malware action ■ Number of logs

Widget	Type	Description
Timeline of Infections (Top 20)	Timeline	Shows the timeline of malicious connections to Command and Control (C&C) servers across all infected hosts. Shows: ▪ Source IP addresses of the top 20 infected hosts ▪ Number of logs for the top 20 infected hosts ▪ Dates and times Different colors show different infected hosts.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
(blade:Anti-Bot AND severity:(Medium OR High OR Critical) AND confidence_level:(Medium OR Medium-High OR High) NOT "Mail analysis") OR (blade:IPS AND "Malware Traffic")
```

Best Practices

1. To see which internal hosts initiate the most malicious connections with Command and Control (C&C) servers:
 - Examine the **Top Malicious Command And Control Connections**.
 - Examine the Threat Prevention logs from the Security Gateway about the internal hosts that initiate the most malicious connections with C&C servers. To do so, double-click the host entry. In the Threat Prevention logs, examine the **Suppressed Logs** column (see ["Log Fields" on page 504](#)).
2. For every infected host, query for its IP address to see all threat events related to that host.

This lets you better understand the malicious behavior of the infected host.

To query an IP address for all related threat events:

- a. Right-click an IP address.
- b. In the context menu, click **Filter: "<IP Address>"**
- c. At the top, click **Cyber Attack View - Gateway**.

3. If you configured the Anti-Bot Software Blade based on Check Point recommendations, the Security Gateway generates both **Detect** and **Prevent** logs.

The Anti-Bot **Detect** logs do not mean that the Security Gateway allowed malicious connections.

The Anti-Bot can generate the **Detect** logs, if you enabled the DNS trap feature.

For more information, see:

- [sk74060: Anti-Virus Malware DNS Trap feature](#)
- [sk74120: Why Anti-Bot and Anti-Virus connections may be allowed even in Prevent mode](#)

Timeline of Infected Hosts

Description

This widget shows the dates and the number of logs for hosts in the network infected with malware over the selected report period.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

This information helps you understand the infections trend in your network.

Different colors show different infected hosts.

Example:



To see the applicable logs (the next drill-down level), double-click on a chart bar inside the graph.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Customer Filter = NOT "Mail analysis"
```

```
Blade > Equals > Anti-Bot
```


Attacks Allowed By Policy

This widget shows the number of attacks using different attack vectors that the current Security Policy allowed (because it was not configured to prevent them) over the selected report period.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

Understand the different vectors and types of attacks to improve your network protection.

Example:

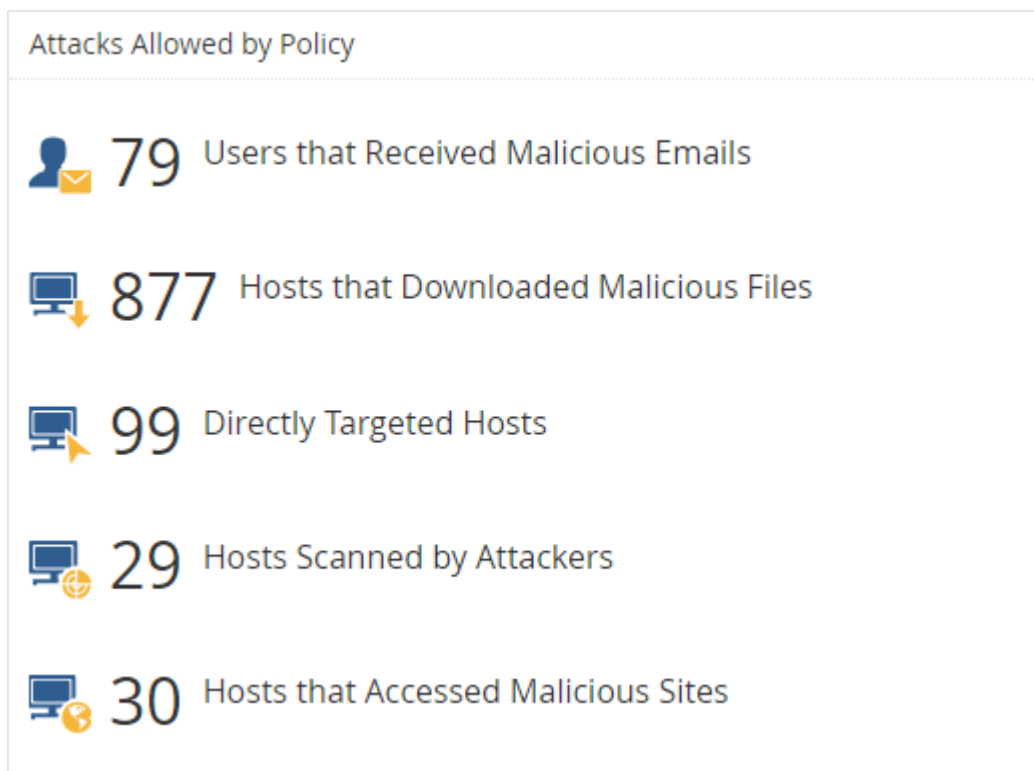

To open the next drill-down level, double-click a headline or matching icon. See the sections below.

Widget Query:

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Action > Equals > Bypass, Detect
```

```
Action > Equals > Bypass, Detect
```

Users that Received Malicious Emails (Attacks Allowed By Policy)

Description

In the main **Cyber Attack View**, in the **Attacks Allowed By Policy** section, double-click **Users that Received Malicious Emails**.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.


The email vector is the common vector used to deliver a malicious payload.

This drill-down view shows a summary of email attack attempts.

The IPS, Anti-Virus, Threat Emulation and Threat Extraction Software Blades work in parallel to determine if an email is malicious and provide multi-layer protection.

Drill-Down View

This is an obfuscated example of the drill-down view:

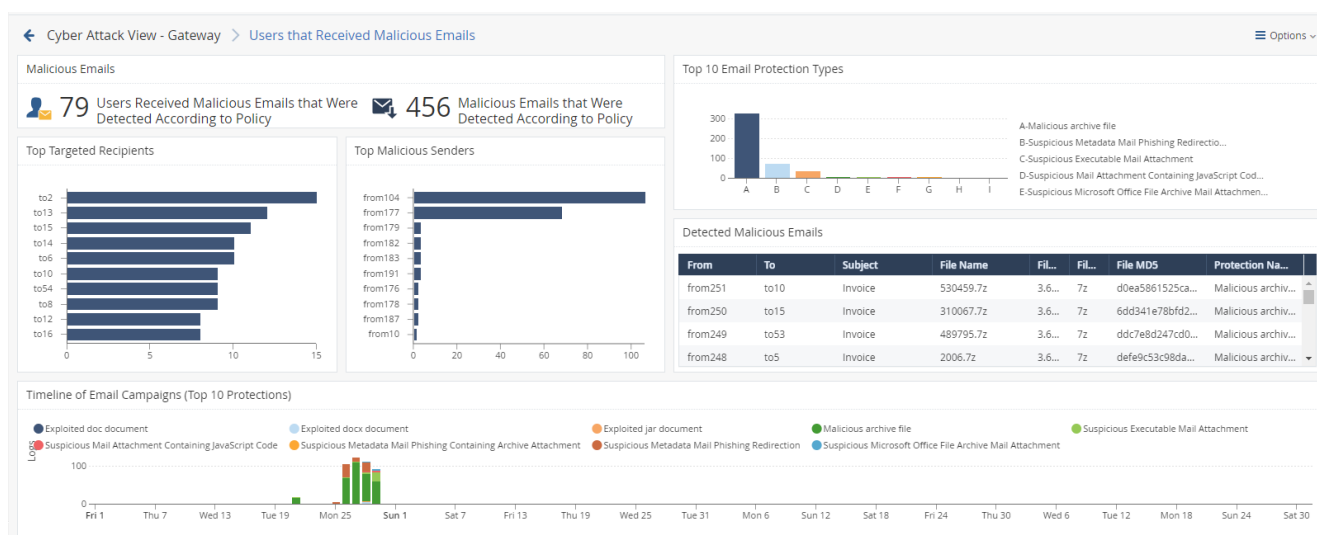

To see the applicable logs (the next drill-down level), double-click a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Malicious Emails	Infographic	Shows the total number of emails with content that the Security Gateway found as malicious.

Widget	Type	Description
Top 10 Email Protection Types	Chart	Shows top Check Point protections that found malicious emails. Shows: ■ The names of the top protections on (from all the Software Blades) that found malicious emails. ■ The number of malicious emails the top protections found. Different colors show different protection types.
Top Targeted Recipients	Chart	Shows the recipients of malicious emails sorted by the number of emails they received. Shows: ■ Users, who received the largest number of malicious emails. ■ The number of malicious emails they received. Different colors show different recipients.
Top Malicious Senders	Chart	Shows the senders of malicious emails sorted by the number of emails they sent. Shows: ■ Users, who sent the largest number of malicious emails. ■ The number of malicious emails they sent. Different colors show different senders.
Detected Malicious Emails	Table	Shows malicious emails. Shows this information about the detected malicious emails: ■ From ■ To ■ Subject ■ File Name ■ File Size ■ File MD5 ■ Protection Name

Widget	Type	Description
Timeline of Email Campaigns (Top 10 Protections)	Timeline	Shows the number of detected malicious emails and their timeline. The timeline is divided into different protection types. Different colors show different campaigns.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Calculated Service > Equals > SMTP
```

```
Custom Filter = ((blade:ips AND ("Adobe Reader Violation" OR
"Content Protection Violation" OR "Mail Content Protection
Violation" OR "SMTP Protection Violation" OR "Phishing Enforcement
Protection" OR "Adobe Flash Protection Violation"))) OR
(blade:"Threat Emulation") OR (blade:Anti-Virus ) OR
(blade:"Threat Extraction" AND content_risk ("Medium" OR "High" OR
"Critical"))) AND service:("pop3" OR "smtp" OR "imap")
```

Best Practices

Best practices against malicious emails:

- Examine the **Detected Malicious Emails** to see the number of emails with malicious content that the current Security Policy detected, but did not prevent.
- Examine the **Top 10 Email Protection Types** to see the top attack types.
Pay attention to protections configured to work in **Detect** mode instead of **Prevent** mode. Fine-tune your email policy accordingly.
- In the Threat Prevention logs from the Security Gateway, examine the **Description** field (see ["Log Fields" on page 504](#)) to see if the Anti-Virus Software Blade work is in the **Background** or **Hold** mode.

To do so, in the **Detected Malicious Emails**, double-click on one of the counters > open the log > refer to the **Description** field.

In addition, read [sk74120: Why Anti-Bot and Anti-Virus connections may be allowed even in Prevent mode](#).

Hosts that Downloaded Malicious Files (Attacks Allowed By Policy)

Description

In the main **Cyber Attack View**, in the **Attacks Allowed By Policy** section, double-click **Hosts that Downloaded Malicious Files**.


Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

This drill-down view shows a summary of attacks that used malicious files.

This drill-down view shows all the malicious files caught by Check Point Threat Prevention's multi-layer protections.

Drill-Down View

This is an obfuscated example of the drill-down view:

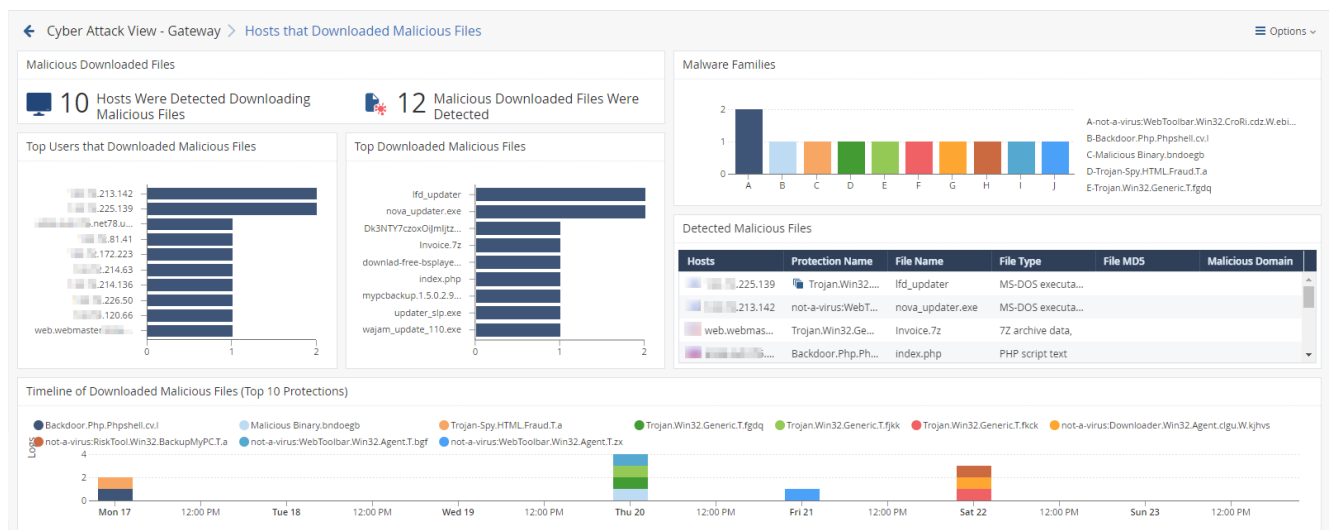

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Malicious Downloaded Files	Infographic	Shows: ■ The number of hosts that downloaded malicious files. ■ The number of downloaded malicious files.
Malware Families	Chart	Shows the top downloaded malware families (based on Check Point ThreatWiki and Check Point Research). Different colors show different families.
Top Users that Downloaded Malicious Files	Chart	Shows hosts that downloaded the largest number of malicious files. The chart is sorted by the number of downloaded malicious files.
Top Downloaded Malicious Files	Chart	Shows the number of downloads for the top malicious files. The chart is sorted by the number of appearances of downloaded malicious files.
Detected Malicious Files	Table	Shows the downloaded malicious files. Shows: ■ Hosts that downloaded malicious files ■ The name of the protection that detected the malicious files ■ The name of the malicious file ■ The type of the malicious file ■ The MD5 of the malicious file ■ Malicious Domain
Timeline of Downloaded Malicious Files (Top 10 Protections)	Timeline	Shows the number of logs for downloaded malicious files. Different colors show different files.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = ((blade:"threat emulation") OR (blade:"anti-virus"
AND "signature") OR (blade:ips AND ("Adobe Reader Violation" OR
"Content Protection Violation" OR "Instant Messenger" OR "Adobe
Flash Protection Violation"))))
```

Best Practices

Best practices against malicious files:

- In the **Attacks Allowed By Policy** section, click **Hosts that Downloaded Malicious Files**.

1. In the **Malicious Downloaded Files** widget, double-click the **Hosts Were Detected Downloading Malicious Files** infographic.
2. Locate events from the IPS Software Blade only.
3. Examine the IPS protections currently configured in **Detect** mode and decide if you can change them to **Prevent** mode.

To configure IPS protections in SmartConsole: From the left navigation panel, click **Security Policies** > click the **Threat Prevention** section > at the bottom, click **IPS Protections** > edit the applicable IPS protection > install the Threat Prevention Policy.

- In the Threat Prevention logs from the Security Gateway, examine the **Description** field (see ["Log Fields" on page 504](#)) to see if the Anti-Virus Software Blade work is in the **Background** or **Hold** mode.

In addition, read [sk74120: Why Anti-Bot and Anti-Virus connections may be allowed even in Prevent mode](#).

Directly Targeted Hosts (Attacks Allowed By Policy)

Description

In the main **Cyber Attack View**, in the **Attacks Allowed By Policy** section, double-click **Directly Targeted Hosts**.


Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

This drill-down view shows a summary of network and hosts exploit attempts.

Host exploit attempts generate the majority of Threat Prevention events.

Drill-Down View

This is an obfuscated example of the drill-down view:

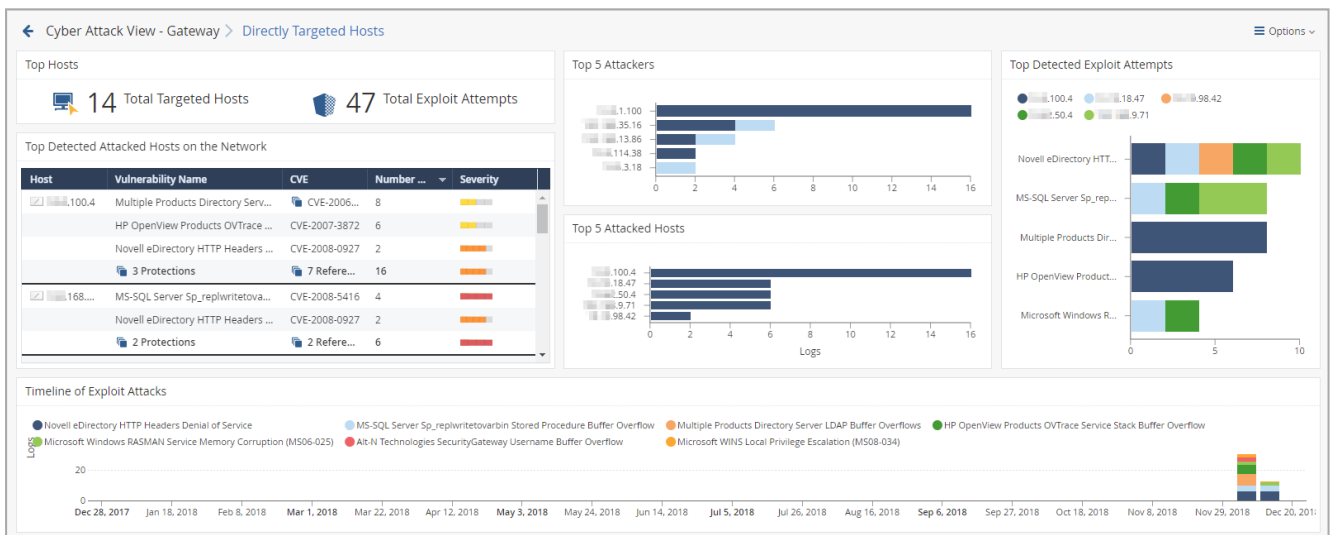

To see the applicable logs (the next drill-down level), double-click on the desired value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Top Hosts	Infographic	Shows: - The total number of attacked internal hosts. - The total number of detected exploit attempts.

Widget	Type	Description
Top 5 Attackers	Chart	Shows the top attackers sorted by the number of their exploit attempts. Shows: ▪ The source IP addresses of top attackers. ▪ The number of logs for exploit attempts. Different colors show different exploited vulnerabilities. For more information, see the Top Detected Exploits Attempts widget.
Top 5 Attacked Hosts	Chart	Shows the top attacked hosts sorted by the number of attempted exploits. Shows: ▪ The IP addresses of top attacked internal hosts. ▪ The number of logs for attempted exploits.
Top Detected Exploit Attempts	Chart	Shows the top exploit attempts on internal hosts. Shows: ▪ The names of the top detected exploits. ▪ The number of logs for these exploits. Different colors show different exploited vulnerabilities.
Top Detected Attacked Hosts on the Network	Table	Shows the list of internal hosts and the exploit attempts they encountered. Shows: ▪ The IP addresses of your attacked internal hosts. ▪ Names of exploited vulnerabilities. ▪ CVE ▪ Amount of reported events for each attacked internal host. ▪ Severity.
Timeline of Exploit Attacks	Timeline	Shows the names of exploited vulnerabilities and their timeline. The timeline is divided into different exploit attempts. Different colors show different exploited vulnerabilities.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = blade:IPS NOT ("SMTP" OR "Adobe Reader Violation"  
OR "Content Protection Violation" OR "Mail Content Protection  
Violation" OR "SMTP Protection Violation" OR "Phishing Enforcement  
Protection" OR "Adobe Flash Protection Violation" OR "Adobe Reader  
Violation" OR "Content Protection Violation" OR "Instant  
Messenger" OR "Adobe Flash Protection Violation" OR "Scanner  
Enforcement Violation" OR "Port Scan" OR "Novell NMAP Protocol  
Violation" OR "Adobe Flash Protection Violation" OR "Adobe  
Shockwave Protection Violation" OR "Web Client Enforcement  
Violation" OR "Exploit Kit")
```

Best Practices

Best practices against network and host exploits:

Category	Description
General Best Practices	■ Examine the Top Detected Exploit Attempts widget to understand what are the top exploits and vulnerabilities used to attack your network. This lets you determine if your network is under a specific massive attack, or if this is a false positive. This widget also shows the top attacked hosts. This lets you plan a "patch procedure" for your hosts based on the current exploit attempts. ■ To understand if an attacker performed a reconnaissance of a specific host: a) In the Top 5 Attacked Hosts widget, right-click a chart bar for a host. b) In the context menu, click Filter: "<IP Address>". c) At the top, click Cyber Attack View - Gateway. d) Pay attention to the Hosts Scanned by Attackers counter. ■ Examine the Timeline of Exploit Attacks for trends. This lets you understand if your network is under a specific massive attack, or if this is a false positive. ■ Examine the Top 5 Attackers widget. Double-click on each IP address to see the applicable logs. In the logs, examine the source countries. Decide if you need to block these countries with a Geo Policy. ■ In the logs examine the Resource field (see "Log Fields" on page 504), which may contain the malicious request. This is the full path the attacker tried to access on your attacked internal host. ■ You can perform the detected attack by yourself (for example, you can use a local penetration tester). This provides a real test if the ability to exploit your internal host exists.

Category	Description
Best Practices for events that the Security Gateway detected, but did not prevent	■ Schedule SmartView to send an email with data regarding Directly Targeted Hosts attacks in your network. This is one of the most important steps to avoid exploits. This important email will expose incomplete or insecure security configurations. ■ Examine the current IPS configuration in SmartConsole and change the applicable settings to increase the security. ■ Examine the Top 5 Attacked Hosts and Top Detected Exploit Attempts widgets to find vulnerable internal hosts. Examine if there is a correlation between the software type and software version of the attacked internal hosts and the exploit attempt. Connect to the attacked internal hosts and determine if the exploit was successful. ■ For the attacked internal hosts, examine: • Time of the detected events. • Time the attacked internal hosts sent their traffic. • Amount of traffic the attacked internal hosts sent. • Geo location of the destination IP addresses, to which the attacked internal hosts sent their traffic. • Protocol and port the attacked internal hosts used to send their traffic. • Reputation of the destination IP addresses and domains, to which the attacked internal hosts sent their traffic. If you enable the Anti-Bot Software Blade on the Security Gateway, the logs can show connections with Command and Control (C&C) servers from your network.

Host Scanned by Attackers (Attacks Allowed By Policy)

Description


In the main **Cyber Attack View**, in the **Attacks Allowed By Policy** section, click **Host Scanned by Attackers**.

This drill-down view shows the scanned hosts on your internal network.

Network scanners are common. Expect to see many events related to this stage of an attack.

Drill-Down View

This is an obfuscated example of the drill-down view:

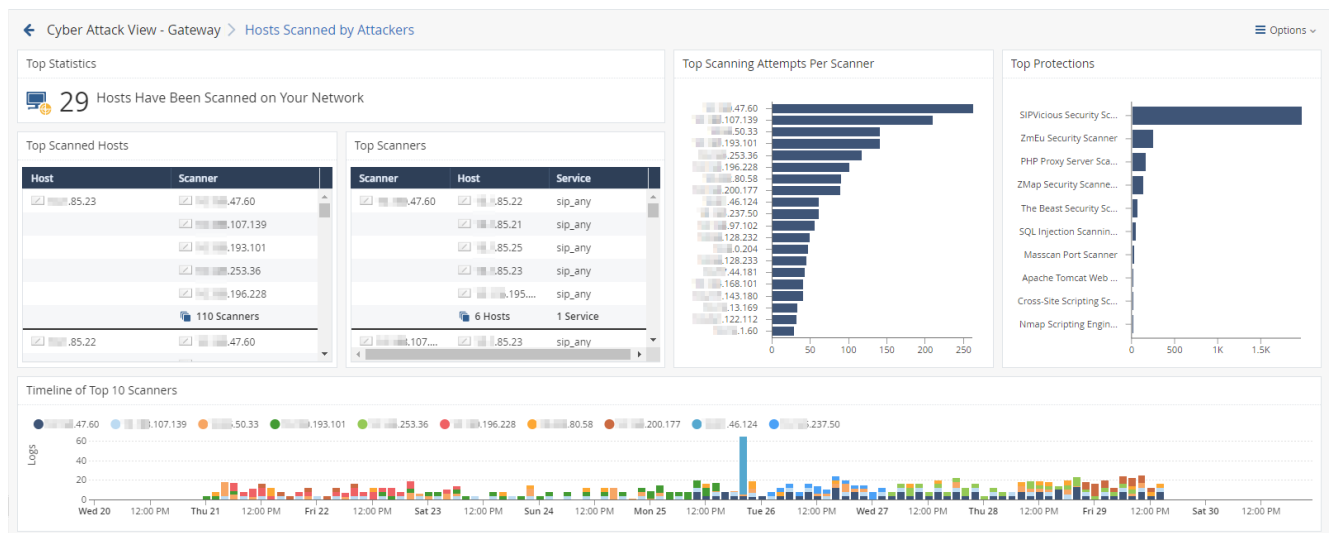

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Top Statistics	Infographic	Shows the number of internal hosts scanned the most.

Widget	Type	Description
Top Scanning Attempts Per Scanner	Chart	Shows the scanners and the number of their scan attempts. The chart is ordered by the by number of scan attempts. Shows: ■ The scanner source IP addresses. ■ The number of scan attempts for each scanner.
Top Protections	Chart	Shows the top protections that reported the scan events. Shows: ■ The names of protections that reported the largest number of scan events. ■ The number of detected scan events for each protection.
Top Scanned Hosts	Table	Shows information about the most scanned internal hosts: ■ Destination (host) IP addresses. ■ Source (scanner) IP addresses. ■ The total number of destinations and sources.
Top Scanners	Table	Shows information about the scanners: ■ Source (scanner) IP address. ■ Destination (host) IP addresses and total number of scanned destinations. ■ Check Point services, to which these scan attempts matched (Protocols and Ports).
Timeline of Top 10 Scanners	Timeline	Shows the number of scanned hosts for each detected scanner and their timeline. Different colors show different scanners.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = "Scanner Enforcement Violation" OR "Port Scan" OR
"Novell NMAP Protocol Violation"
```

Best Practices

Best practices against network reconnaissance attempts:

1. Find the hosts that are able to connect to external networks **through** the Security Gateway.

Configure the applicable Access Control rules for hosts that you do not want to connect to external networks.

2. If you use your own vulnerability scanner, you have two options:
 - Add an exception to your policy, so that the Security Gateway does not enforce protections against this scanner.
 - If you still want the Security Gateway to report events generated by your scanner, then run an explicit query that excludes your scanner and shows only the external scanners.
3. Use logs generated by scanning events to determine if new hosts on the network are connecting to the outside world.

Hosts that Accessed Malicious Sites (Attacks Allowed By Policy)


Description

In the main **Cyber Attack View**, in the **Attacks Allowed By Policy** section, double-click **Hosts that Accessed Malicious Sites**.

The drill-down view summarizes access attempts to malicious sites from the internal network.

Drill-Down View

This is an obfuscated example of the drill-down view:

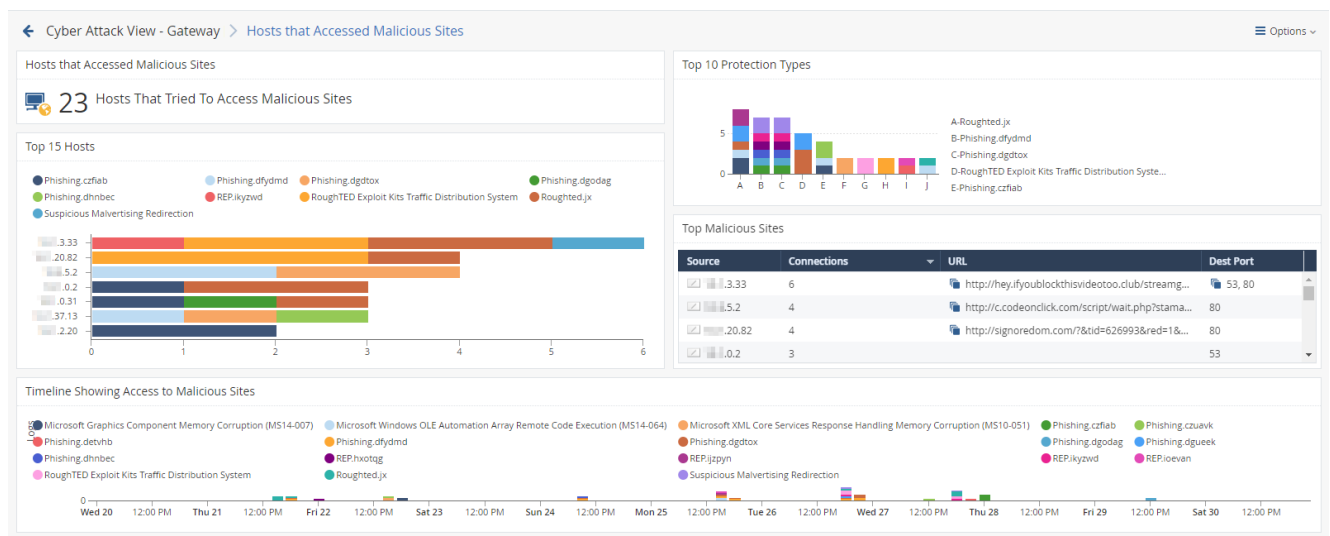

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Hosts that Accessed Malicious Sites	Infographic	Shows the number of internal hosts that accessed malicious websites.
Top 10 Protection Types	Chart	Shows the number of events reported by web attack protections for the detected malware families (based on Check Point ThreatWiki and Check Point Research). Different colors show different malware families.

Widget	Type	Description
Top 15 Hosts	Chart	Shows the internal hosts that accessed malicious websites. The chart is ordered by the number of connections from each host. Shows: ■ The source IP addresses of internal hosts that accessed malicious websites. ■ The detected malware families (based on Check Point ThreatWiki and Check Point Research). ■ The number of logged connections from each host. Different colors show different malware families.
Top Malicious Sites	Table	Shows the information about malicious websites. Shows: ■ The source IP addresses of internal hosts. ■ The number of logged connections from each host. ■ URLs of malicious sites. ■ Destination ports of malicious sites.
Timeline Showing Access to Malicious Sites	Timeline	Shows the detected malware families and their timeline. The timeline is divided into protection types. Different colors show different malware families.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = ((blade:IPS AND ("Adobe Flash Protection Violation" OR "Adobe Shockwave Protection Violation" OR "Web Client Enforcement Violation" OR "Exploit Kit")) OR (blade:Anti-Virus AND ("URL Reputation" OR "DNS Reputation")))
```

```
Calculated Service > Not equals > smtp
```

Best Practices

Best practices against malicious sites:

- Examine the Threat Prevention logs to determine how much data (if at all) your internal hosts sent to and received from malicious websites.

If these logs show extremely low, or zero, amount of data, read [sk74120: Why Anti-Bot and Anti-Virus connections may be allowed even in Prevent mode](#).

- In the Threat Prevention logs from the Security Gateway, examine the **Description** field (see *"Log Fields" on page 504*) to see if the Anti-Virus Software Blade work is in the **Background** or **Hold** mode.


In addition, read [sk74120: Why Anti-Bot and Anti-Virus connections may be allowed even in Prevent mode](#).

Attacks Prevented By Policy

This widget shows the number of attacks using different attack vectors that the Security Policy prevented over the selected report period.

 **Note** - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

Example:

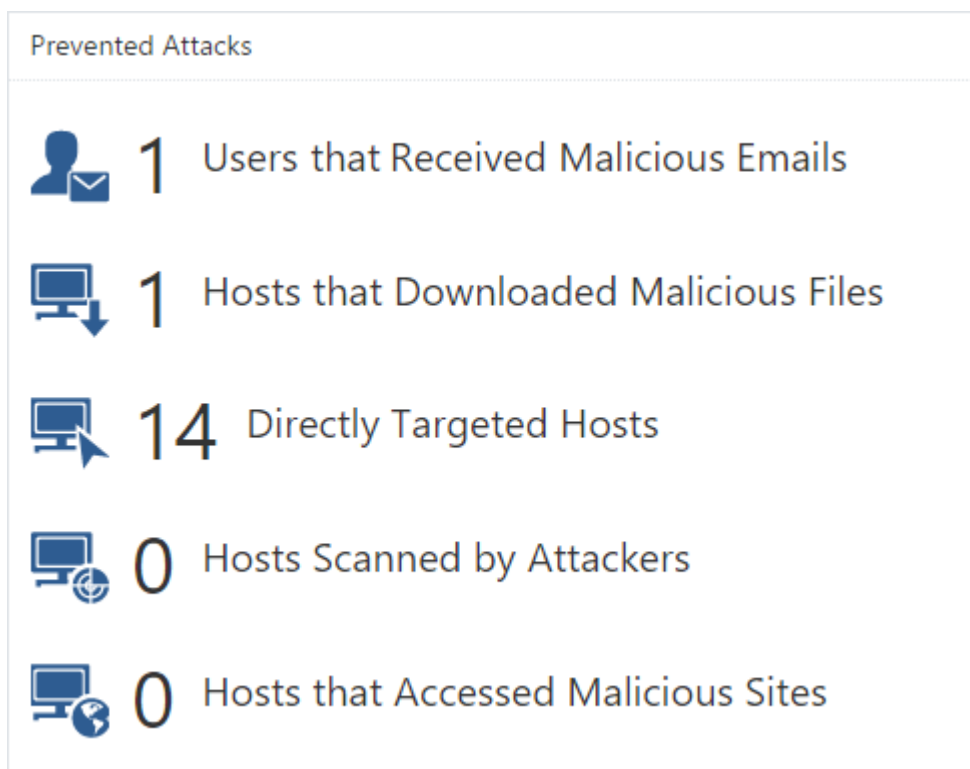

To open the next drill-down level, double-click a headline or matching icon. See the sections below.

Widget Query:

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Action > Equals > Drop,Reject,Block,Prevent,Redirect
```


Users that Received Malicious Emails (Prevented Attacks)

Description

In the main **Cyber Attack View**, in the **Prevented Attacks** section, double-click **Users that Received Malicious Emails**.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.


The email vector is the common vector used to deliver a malicious payload.

This drill-down view shows a summary of email attack attempts.

The IPS, Anti-Virus, Threat Emulation and Threat Extraction Software Blades work in parallel to determine if an email is malicious and provide multi-layer protection.

Drill-Down View

This is an obfuscated example of the drill-down view:

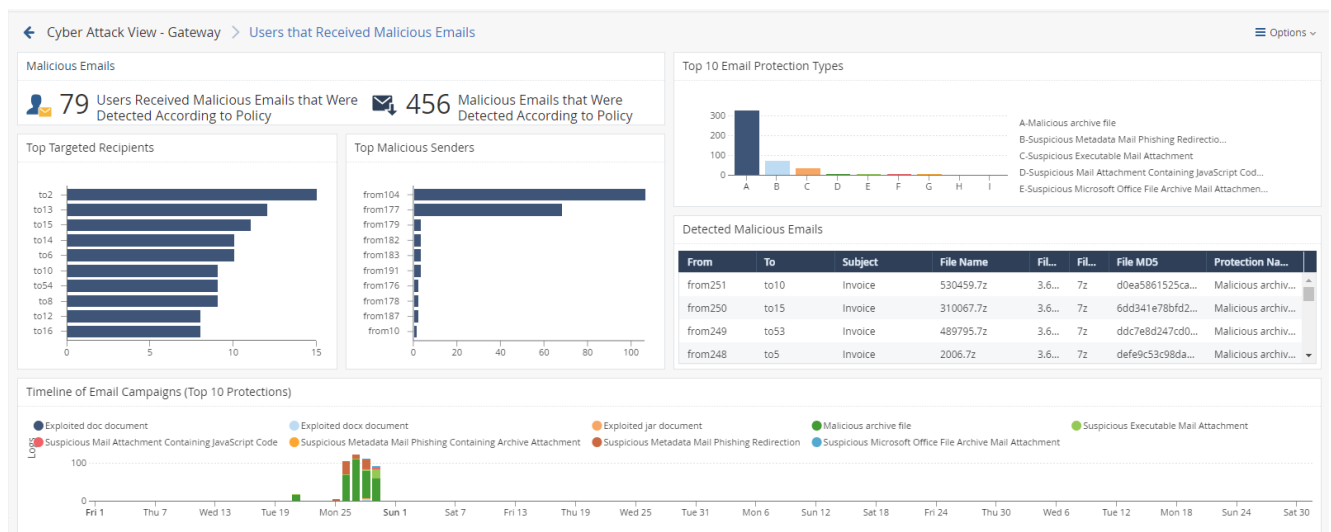

To see the applicable logs (the next drill-down level), double-click a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Malicious Emails	Infographic	Shows the total number of emails with content that the Security Gateway found as malicious.
Top 10 Email Protection Types	Chart	Shows top Check Point protections that found malicious emails. Shows: ■ The names of the top protections on (from all the Software Blades) that found malicious emails. ■ The number of malicious emails the top protections found. Different colors show different protection types.
Top Targeted Recipients	Chart	Shows the recipients of malicious emails sorted by the number of emails they received. Shows: ■ Users, who received the largest number of malicious emails. ■ The number of malicious emails they received. Different colors show different recipients.
Top Malicious Senders	Chart	Shows the senders of malicious emails sorted by the number of emails they sent. Shows: ■ Users, who sent the largest number of malicious emails. ■ The number of malicious emails they sent. Different colors show different senders.

Widget	Type	Description
Detected Malicious Emails	Table	Shows malicious emails. Shows this information about the detected malicious emails: ■ From ■ To ■ Subject ■ File Name ■ File Size ■ File MD5 ■ Protection Name
Timeline of Email Campaigns (Top 10 Protections)	Timeline	Shows the number of detected malicious emails and their timeline. The timeline is divided into different protection types. Different colors show different campaigns.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Calculated Service > Equals > SMTP
```

```
Custom Filter = ((blade:ips AND ("Adobe Reader Violation" OR
"Content Protection Violation" OR "Mail Content Protection
Violation" OR "SMTP Protection Violation" OR "Phishing Enforcement
Protection" OR "Adobe Flash Protection Violation"))) OR
(blade:"Threat Emulation") OR (blade:Anti-Virus ) OR
(blade:"Threat Extraction" AND content_risk ("Medium" OR "High" OR
"Critical")) AND service:("pop3" OR "smtp" OR "imap"))
```

Best Practices

Best practices against malicious emails:

- Examine the **Timeline of Email Campaigns (Top 10 Protections)** to see email attack trends against your organization.
- To fine-tune your email protection policy, examine the **Top 10 Email Protection Types** to see the top attack types.

For example, if you see that the top protection that detected malicious emails is **Malicious archive file**, you need to decide if your Security Policy needs to allow archives in emails.

If you need to allow archives in emails, change your policy accordingly to prevent malicious files and not detect them. This includes enabling more Software Blades, if needed (such as Threat Emulation and Threat Extraction).

- Examine the **Top Targeted Recipients** to understand:
 - Why are these internal email addresses exposed outside of your organization?
 - Should these internal email addresses be known outside of your organization from a business perspective?

Hosts that Downloaded Malicious Files (Prevented Attacks)

Description

In the main **Cyber Attack View**, in the **Prevented Attacks** section, double-click **Hosts that Downloaded Malicious Files**.


Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

This drill-down view shows a summary of attacks that used malicious files.

This drill-down view shows all the malicious files caught by Check Point Threat Prevention's multi-layer protections.

Drill-Down View

This is an obfuscated example of the drill-down view:

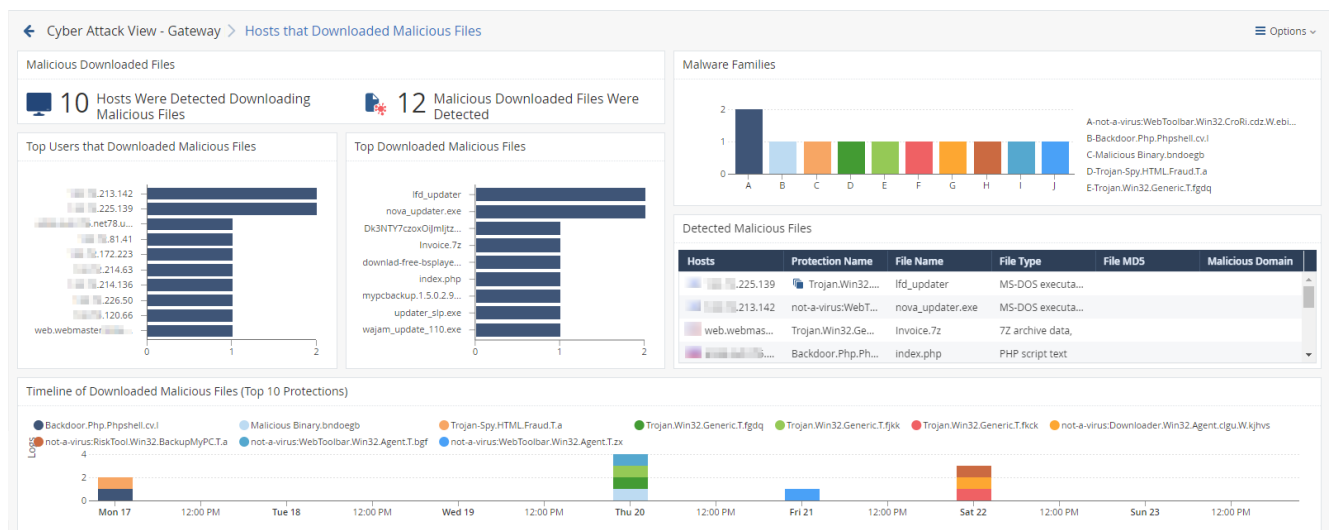

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Malicious Downloaded Files	Infographic	Shows: - The number of hosts that downloaded malicious files. - The number of downloaded malicious files.

Widget	Type	Description
Malware Families	Chart	Shows the top downloaded malware families (based on Check Point ThreatWiki and Check Point Research). Different colors show different families.
Top Users that Downloaded Malicious Files	Chart	Shows hosts that downloaded the largest number of malicious files. The chart is sorted by the number of downloaded malicious files.
Top Downloaded Malicious Files	Chart	Shows the number of downloads for the top malicious files. The chart is sorted by the number of appearances of downloaded malicious files.
Detected Malicious Files	Table	Shows the downloaded malicious files. Shows: ■ Hosts that downloaded malicious files ■ The name of the protection that detected the malicious files ■ The name of the malicious file ■ The type of the malicious file ■ The MD5 of the malicious file ■ Malicious Domain
Timeline of Downloaded Malicious Files (Top 10 Protections)	Timeline	Shows the number of logs for downloaded malicious files. Different colors show different files.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = ((blade:"threat emulation") OR (blade:"anti-virus"
AND "signature")) OR (blade:ips AND (("Adobe Reader Violation" OR
"Content Protection Violation" OR "Instant Messenger" OR "Adobe
Flash Protection Violation"))))
```

Best Practices

Best practices against malicious files:

- Examine the **Top Downloaded Malicious Files**.

If you see a specific malicious file downloaded many times, treat it as attack campaign against your network.

- Examine the **Detected Malicious Files** widget.
- Look for the common malicious domains related to the malicious files. In case a domain appears many times:
 1. If this is an unknown website, add this site to your black list (with the URL Filtering blade).
 2. If this is a known website, contact the site owner to alert them about a possible attack on their website.
 3. If this is your website, investigate the issue and contact [Check Point Incident Response Team](#).

Directly Targeted Hosts (Prevented Attacks)

Description

In the main **Cyber Attack View**, in the **Prevented Attacks** section, double-click **Directly Targeted Hosts**.


Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

This drill-down view shows a summary of network and hosts exploit attempts.

Host exploit attempts generate the majority of Threat Prevention events.

Drill-Down View

This is an obfuscated example of the drill-down view:

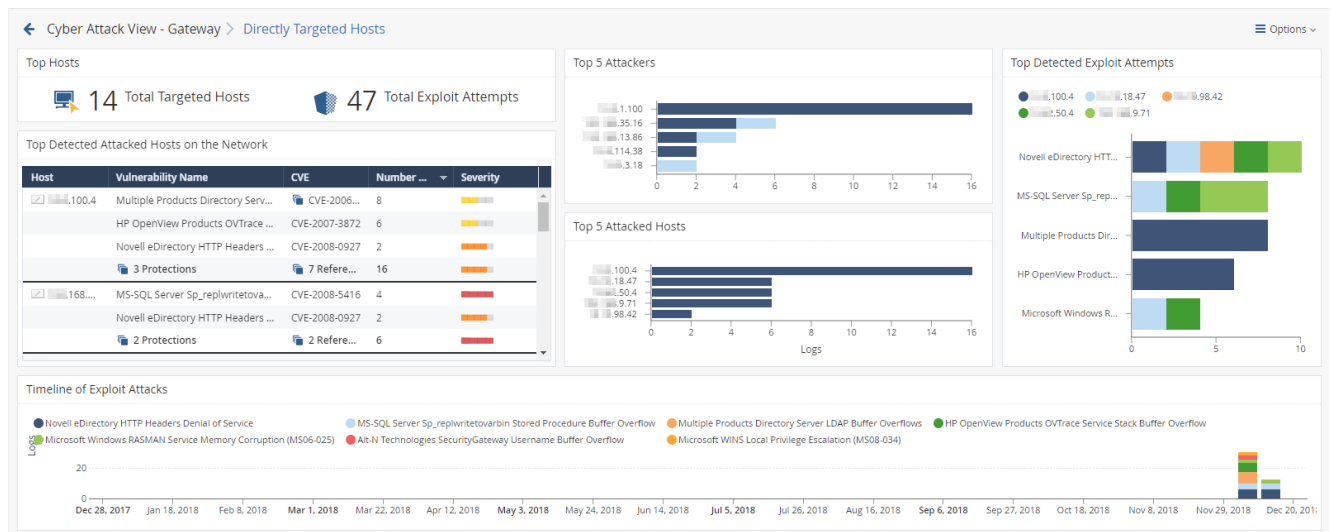

To see the applicable logs (the next drill-down level), double-click on the desired value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Top Hosts	Infographic	Shows: ▪ The total number of attacked internal hosts. ▪ The total number of detected exploit attempts.
Top 5 Attackers	Chart	Shows the top attackers sorted by the number of their exploit attempts. Shows: ▪ The source IP addresses of top attackers. ▪ The number of logs for exploit attempts. Different colors show different exploited vulnerabilities. For more information, see the Top Detected Exploits Attempts widget.
Top 5 Attacked Hosts	Chart	Shows the top attacked hosts sorted by the number of attempted exploits. Shows: ▪ The IP addresses of top attacked internal hosts. ▪ The number of logs for attempted exploits.
Top Detected Exploit Attempts	Chart	Shows the top exploit attempts on internal hosts. Shows: ▪ The names of the top detected exploits. ▪ The number of logs for these exploits. Different colors show different exploited vulnerabilities.

Widget	Type	Description
Top Detected Attacked Hosts on the Network	Table	Shows the list of internal hosts and the exploit attempts they encountered. Shows: ■ The IP addresses of your attacked internal hosts. ■ Names of exploited vulnerabilities. ■ CVE ■ Amount of reported events for each attacked internal host. ■ Severity.
Timeline of Exploit Attacks	Timeline	Shows the names of exploited vulnerabilities and their timeline. The timeline is divided into different exploit attempts. Different colors show different exploited vulnerabilities.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = blade:IPS NOT ("SMTP" OR "Adobe Reader Violation"
OR "Content Protection Violation" OR "Mail Content Protection
Violation" OR "SMTP Protection Violation" OR "Phishing Enforcement
Protection" OR "Adobe Flash Protection Violation" OR "Adobe Reader
Violation" OR "Content Protection Violation" OR "Instant
Messenger" OR "Adobe Flash Protection Violation" OR "Scanner
Enforcement Violation" OR "Port Scan" OR "Novell NMAP Protocol
Violation" OR "Adobe Flash Protection Violation" OR "Adobe
Shockwave Protection Violation" OR "Web Client Enforcement
Violation" OR "Exploit Kit")
```

Best Practices

Best practices against network and host exploits:

Category	Description
General Best Practices	- Examine the Top Detected Exploit Attempts widget to understand what are the top exploits and vulnerabilities used to attack your network. This lets you determine if your network is under a specific massive attack, or if this is a false positive. This widget also shows the top attacked hosts. This lets you plan a "patch procedure" for your hosts based on the current exploit attempts. - To understand if an attacker performed a reconnaissance of a specific host: a) In the Top 5 Attacked Hosts widget, right-click a chart bar for a host. b) In the context menu, click Filter: "<IP Address>". c) At the top, click Cyber Attack View - Gateway. d) Pay attention to the Hosts Scanned by Attackers counter. - Examine the Timeline of Exploit Attacks for trends. This lets you understand if your network is under a specific massive attack, or if this is a false positive. - Examine the Top 5 Attackers widget. Double-click on each IP address to see the applicable logs. In the logs, examine the source countries. Decide if you need to block these countries with a Geo Policy. - In the logs examine the Resource field (see "Log Fields" on page 504), which may contain the malicious request. This is the full path the attacker tried to access on your attacked internal host. - You can perform the detected attack by yourself (for example, you can use a local penetration tester). This provides a real test if the ability to exploit your internal host exists.
Best Practices for events that the Security Gateway prevented	- Examine the Top Detected Exploit Attempts to determine if the Security Gateway prevented an attack campaign against you network. - Examine (once a month) what are the top exploit attempts against your network. The Check Point Security CheckUp report uses the same queries and shows a full list of attacks and assets in your organization.

Host Scanned by Attackers (Prevented Attacks)

Description


In the main **Cyber Attack View**, in the **Prevented Attacks** section, click **Host Scanned by Attackers**.

This drill-down view shows the scanned hosts on your internal network.

Network scanners are common. Expect to see many events related to this stage of an attack.

Drill-Down View

This is an obfuscated example of the drill-down view:

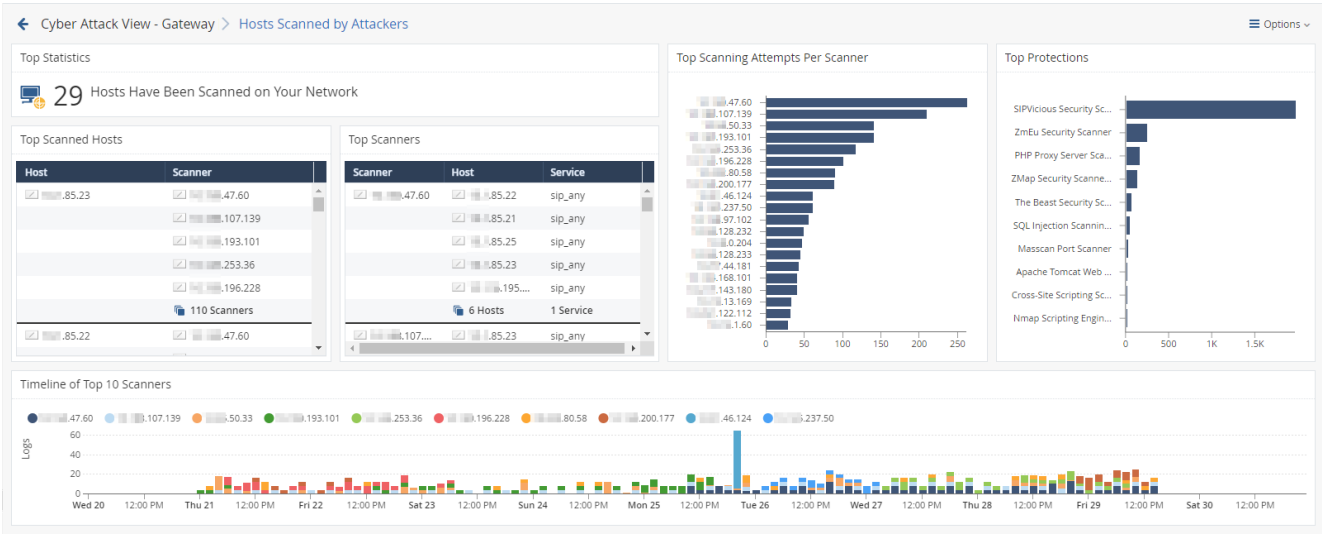

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Top Statistics	Infographic	Shows the number of internal hosts scanned the most.

Widget	Type	Description
Top Scanning Attempts Per Scanner	Chart	Shows the scanners and the number of their scan attempts. The chart is ordered by the by number of scan attempts. Shows: ■ The scanner source IP addresses. ■ The number of scan attempts for each scanner.
Top Protections	Chart	Shows the top protections that reported the scan events. Shows: ■ The names of protections that reported the largest number of scan events. ■ The number of detected scan events for each protection.
Top Scanned Hosts	Table	Shows information about the most scanned internal hosts: ■ Destination (host) IP addresses. ■ Source (scanner) IP addresses. ■ The total number of destinations and sources.
Top Scanners	Table	Shows information about the scanners: ■ Source (scanner) IP address. ■ Destination (host) IP addresses and total number of scanned destinations. ■ Check Point services, to which these scan attempts matched (Protocols and Ports).
Timeline of Top 10 Scanners	Timeline	Shows the number of scanned hosts for each detected scanner and their timeline. Different colors show different scanners.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = "Scanner Enforcement Violation" OR "Port Scan" OR
"Novell NMAP Protocol Violation"
```

Best Practices

Best practices against network reconnaissance attempts:

1. Find the hosts that are able to connect to external networks **through** the Security Gateway.

Configure the applicable Access Control rules for hosts that you do not want to connect to external networks.

2. If you use your own vulnerability scanner, you have two options:
 - Add an exception to your policy, so that the Security Gateway does not enforce protections against this scanner.
 - If you still want the Security Gateway to report events generated by your scanner, then run an explicit query that excludes your scanner and shows only the external scanners.
3. Use logs generated by scanning events to determine if new hosts on the network are connecting to the outside world.

Hosts that Accessed Malicious Sites (Prevented Attacks)


Description

In the main **Cyber Attack View**, in the **Prevented Attacks** section, double-click **Hosts that Accessed Malicious Sites**.

The drill-down view summarizes access attempts to malicious sites from the internal network.

Drill-Down View

This is an obfuscated example of the drill-down view:

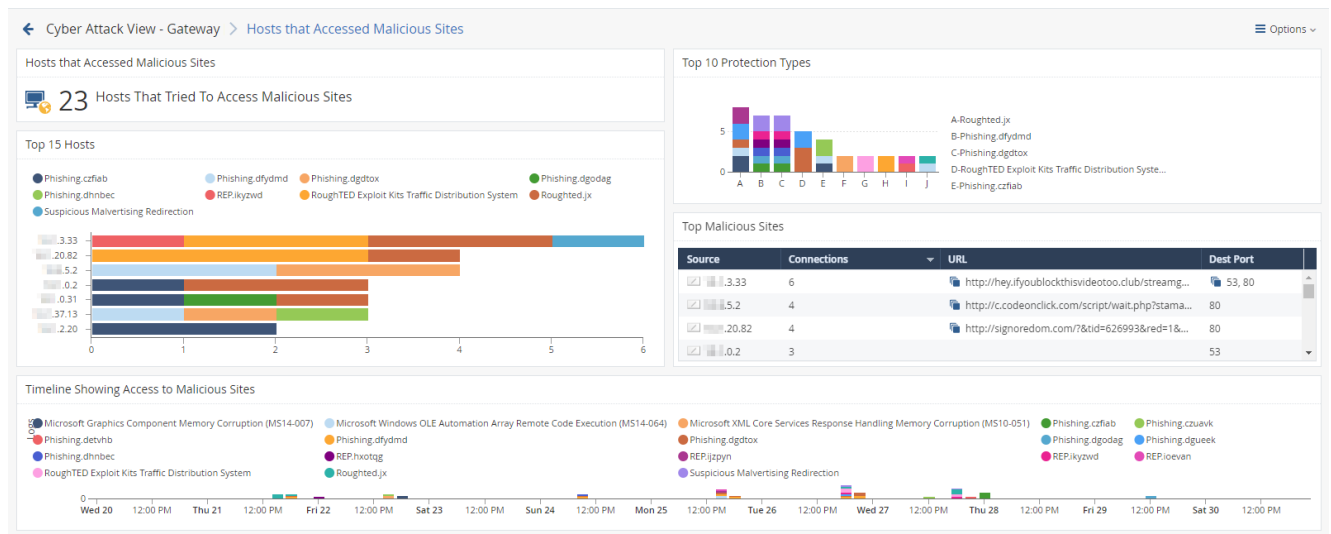

To see the applicable logs (the next drill-down level), double-click on a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Hosts that Accessed Malicious Sites	Infographic	Shows the number of internal hosts that accessed malicious websites.
Top 10 Protection Types	Chart	Shows the number of events reported by web attack protections for the detected malware families (based on Check Point ThreatWiki and Check Point Research). Different colors show different malware families.

Widget	Type	Description
Top 15 Hosts	Chart	Shows the internal hosts that accessed malicious websites. The chart is ordered by the number of connections from each host. Shows: ■ The source IP addresses of internal hosts that accessed malicious websites. ■ The detected malware families (based on Check Point ThreatWiki and Check Point Research). ■ The number of logged connections from each host. Different colors show different malware families.
Top Malicious Sites	Table	Shows the information about malicious websites. Shows: ■ The source IP addresses of internal hosts. ■ The number of logged connections from each host. ■ URLs of malicious sites. ■ Destination ports of malicious sites.
Timeline Showing Access to Malicious Sites	Timeline	Shows the detected malware families and their timeline. The timeline is divided into protection types. Different colors show different malware families.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

```
Custom Filter = ((blade:IPS AND ("Adobe Flash Protection Violation" OR "Adobe Shockwave Protection Violation" OR "Web Client Enforcement Violation" OR "Exploit Kit")) OR (blade:Anti-Virus AND ("URL Reputation" OR "DNS Reputation")))
```

```
Calculated Service > Not equals > smtp
```

Best Practices

Best practices against malicious sites:

- Examine the **Top 15 Hosts** to determine if these hosts are at risk and if you need to clean and reconfigure them.
- Examine the **Top 10 Protection Types** to understand if the websites your internal hosts accessed are compromised.

SandBlast Threat Emulation

Description

This widget shows the number of prevented malicious files over the selected report period.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.


Example:



To open the next drill-down level, double-click a headline or matching icon.

Drill-Down View

This is an obfuscated example of the drill-down view:

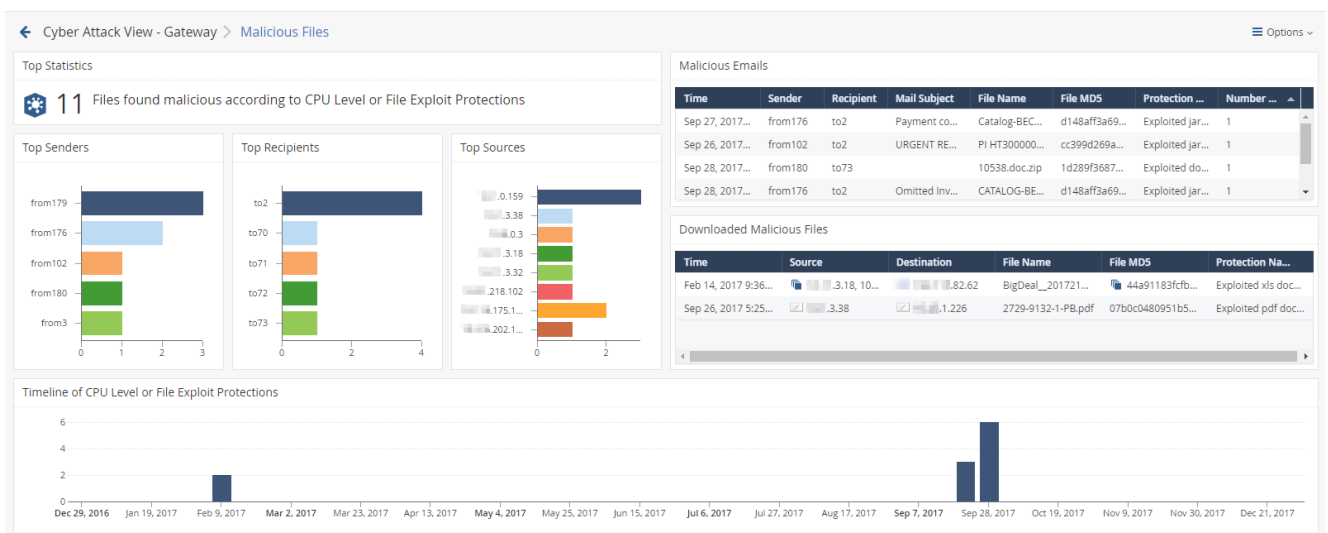

To see the applicable logs (the next drill-down level), double-click a value.

Available Widgets

Widgets available in the drill-down view:

Widget	Type	Description
Top Statistics	Infographic	Shows the number of files that were found malicious according to CPU Level or File Exploit protections.

Widget	Type	Description
Malicious Emails	Table	Shows the malicious emails. Shows: ▪ Date and Time ▪ Sender email ▪ Recipient email ▪ Email subject ▪ Name of attached file ▪ MD5 of attached file ▪ Protection Name ▪ Number of logged emails
Top Senders	Chart	Shows the senders of the malicious emails. The chart is sorted by the number of logs. Shows: ▪ Who sent the largest number of malicious emails. ▪ The number of the malicious emails these users sent.
Top Recipients	Chart	Shows the recipients of the malicious emails. The chart is sorted by the number of logs. Shows: ▪ Who received the largest number of malicious emails. ▪ The number of the malicious emails these users received.
Top Sources	Chart	Shows the source hosts of the malicious emails. The chart is sorted by the sources that sent the largest number of malicious emails. Shows: ▪ Hosts that sent the largest number of malicious emails. ▪ The number of the malicious emails these hosts sent.

Widget	Type	Description
Downloaded Malicious Files	Table	Shows the information about the detected malicious emails: ■ From ■ To ■ Subject ■ File Name ■ File Size ■ File MD5 ■ Protection Name
Timeline of CPU Level and File Exploit Protections	Timeline	Shows number of protection logs and their timeline.

Widget Query

In addition to the ["Default Query" on page 446](#), the widget runs this query:

Custom Filter = "*CPU-Level Detection Event*" OR Exploited

Blade > Equals > Threat Emulation

Product Family > Equals > Threat

Cyber Attack Timeline


Description

This widget shows the number of logs from different Software Blade (Anti-Bot, Anti-Virus, IPS, and Threat Emulation) over the selected report period.

Note - Select the report period in the top left corner of this view. For example, **Last 7 Days**, **This Month**, and so on.

This information helps you determine if a massive attack has occurred.

Example:

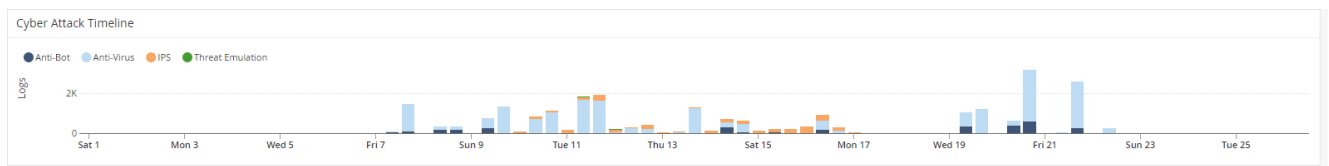

To open the next drill-down level, double-click on a chart bar.

Widget Query

The widget runs the *"Default Query" on page 446*.

MITRE ATT&CK

MITRE ATT&CK is a knowledge base used for the development of threat models and methodologies for the global cybersecurity community.

MITRE ATT&CK lets Check Point customers review the security incidents in their network in a way that exposes the top techniques and tactics used by attackers against their network.

For each malicious file that is found, Threat Emulation (SandBlast technology) adds the techniques and tactics that were used in the attack to the relevant log.



Note - The Threat Emulation blade must be enabled if you want to add MITRE ATT&CK information to the logs.

Configuring Threat Emulation Logs with MITRE ATT&CK Data


1. Open SmartConsole.
2. In the **Gateways & Servers** view, enable the **Threat Emulation** blade on the relevant Security Gateway.
3. Select the Security Gateway, click **Actions > Open Shell**.
4. Run:

```
tecli advanced engine version
```

The Threat Emulation engine version must be higher than 58.990001056

5. Open the Threat Prevention profile in use in the Threat Prevention policy (for example

Optimized), and make sure the Threat Emulation blade is activated.

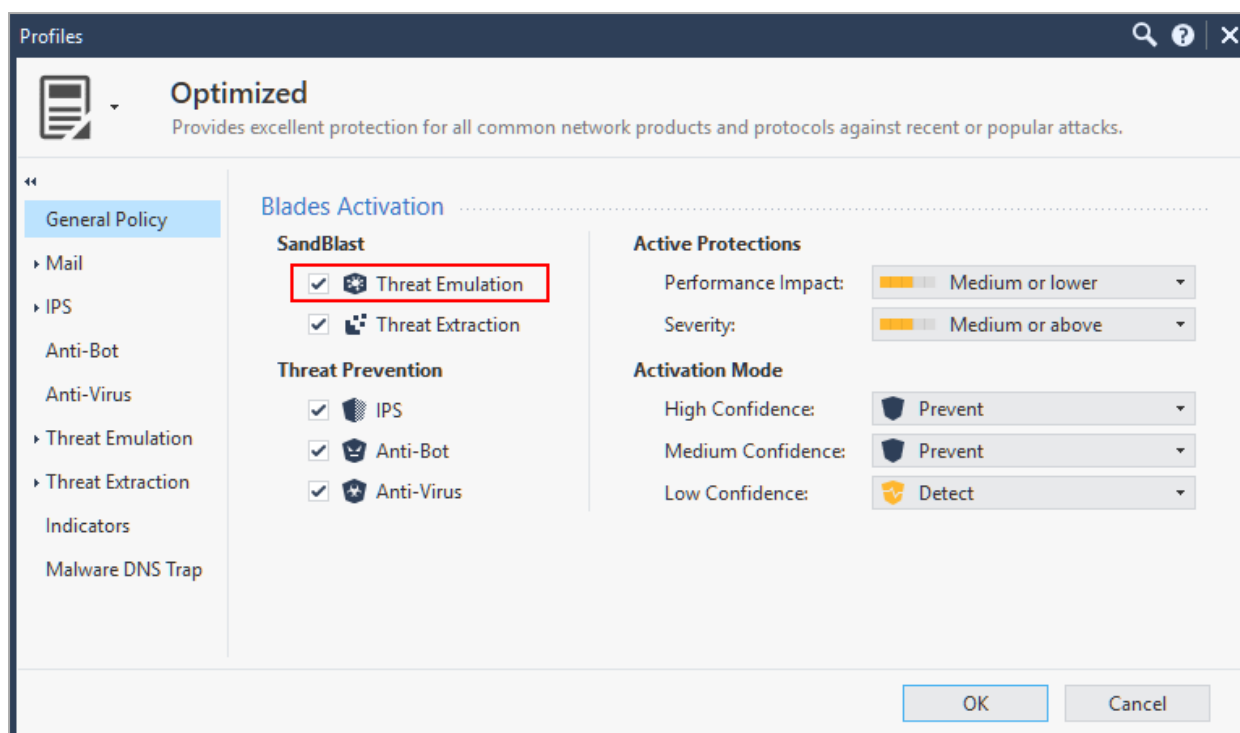


MITRE Logs

To view logs with the added MITRE data:


1. In the **Logs & Events** view, open the **Logs** tab.
2. In the search box, enter this query to find malicious files found by Threat Emulation:

```
Blade:"threat Emulation" AND type:"log" AND NOT severity:
"informational"
```

3. Open one of the logs.

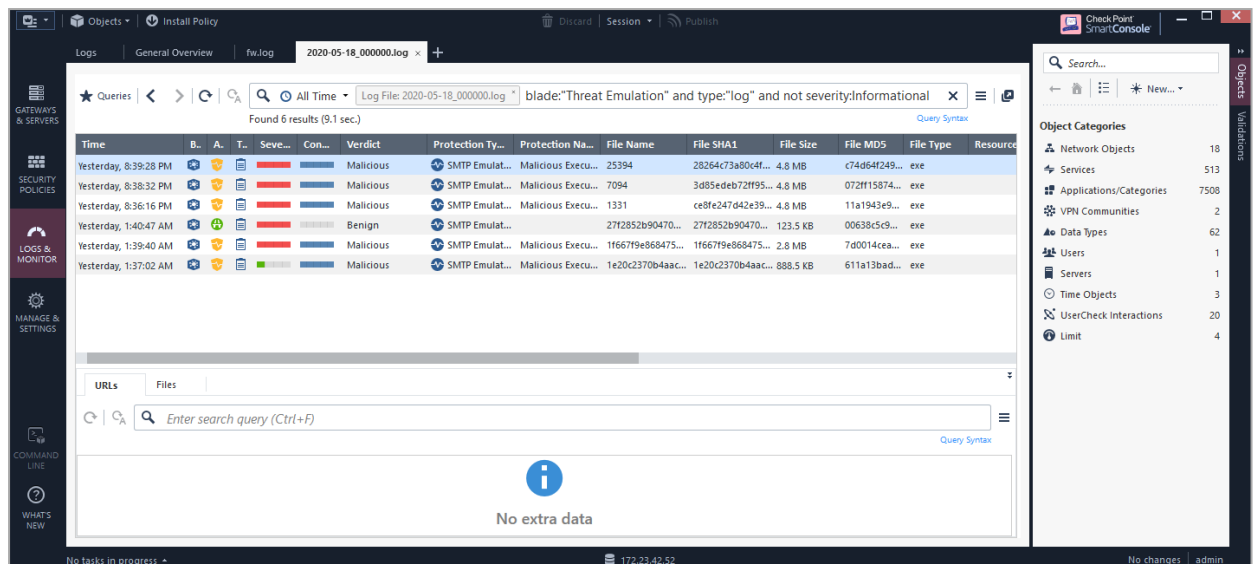

The log shows the MITRE ATT&CK Techniques and Tactics used in the specific attack.

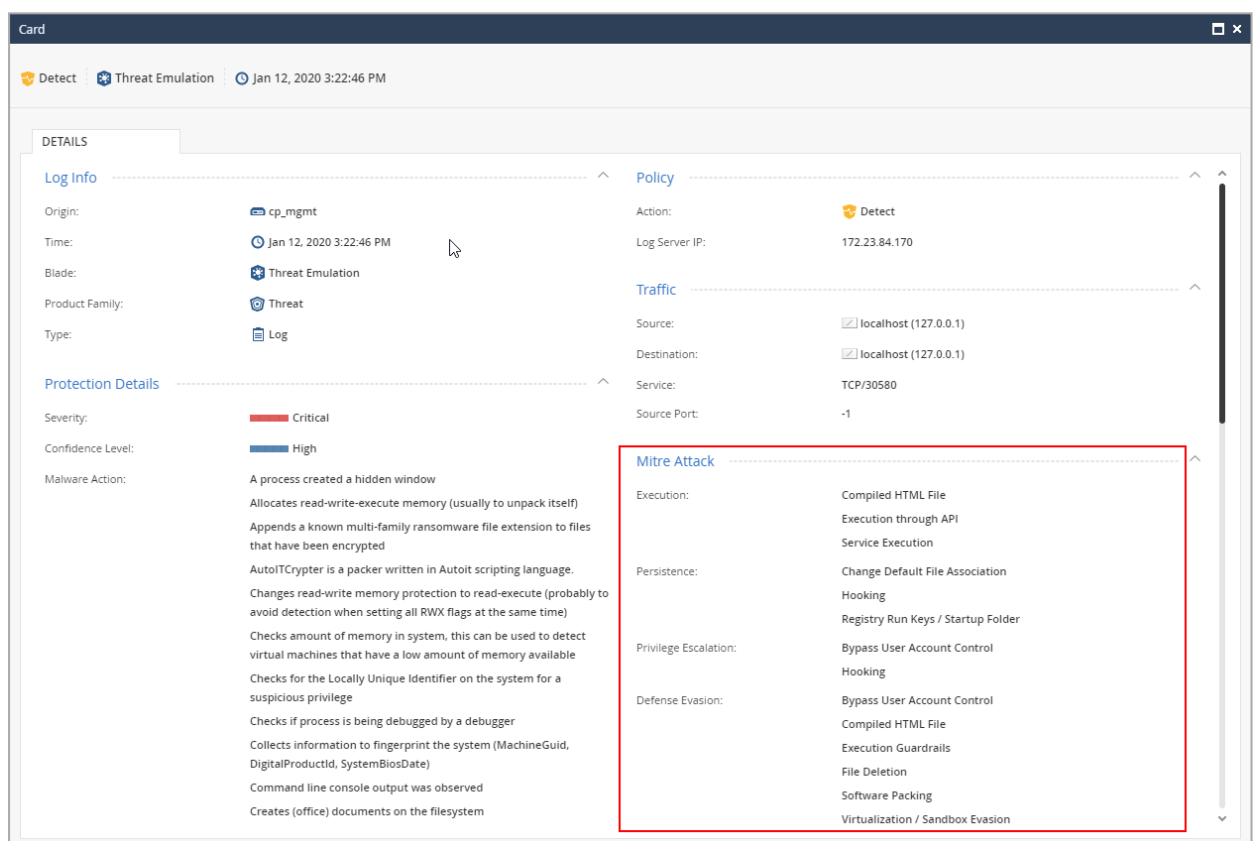

The log may show multiple actions such as execution and persistence. For more on each technique as well as mitigation advice, visit the [MITRE ATT&CK web site](https://www.mitre.org/attack).


MITRE ATT&CK in SmartView

Focusing on malicious files, the **MITRE ATT&CK** view in **Logs & Events** gives you a high level overview of the techniques used by attackers against your network.

Check Point SmartView											
General Overview Logs Mitre Attack											
Last 7 Days Search											
Mitre Attack											
Initial Access 0	Execution 24	Persistence 24	Privilege Escalation 18	Defense Evasion 24	Credential Access 24	Discovery 24	Lateral Movement 6	Collection 24	Exfiltration 18	Command and Control 0	Impact 12
Drive-by Compromise (0)	AppleScript (0)	.bash_profile and .bashrc (0)	Access Token Manipulation (0)	Access Token Manipulation (0)	Account Manipulation (0)	Account Discovery (0)	AppleScript (0)	Audio Capture (0)	Automated Exfiltration (0)	Commonly Used Port (0)	Account Access Removal (0)
Exploit Public-Facing Application (0)	CMSTP (0)	Accessibility Features (0)	Accessibility Features (0)	Binary Padding (0)	Bash History (0)	Application Window Discovery (18)	Application Deployment Software (0)	Automated Collection (0)	Data Compressed (0)	Communication Through Removable Media (0)	Data Destruction (0)
External Remote Services (0)	Command Line Interface (6)	Account Manipulation (0)	AppCert DLLs (0)	BITs Jobs (0)	Brute Force (0)	Browser Bookmark Discovery (18)	Component Object Model and Distributed COM (0)	Clipboard Data (12)	Data Encrypted (18)	Connection Proxy (0)	Data Encrypted for Impact (12)
Hardware Additions (0)	Compiled HTML File (12)	AppCert DLLs (0)	AppInit DLLs (0)	Bypass User Account Control (6)	Credential Dumping (0)	Browser Bookmark Discovery (18)	Component Object Model and Distributed COM (0)	Data from Information Repositories (0)	Data Transfer Size Limits (0)	Custom Command and Control Protocol (0)	Defacement (0)
Replication Through Removable Media (0)	Component Object Model and Distributed COM (0)	AppInit DLLs (0)	Application Shimming (0)	Clear Command History (0)	Credentials from Web Browsers (6)	Domain Trust Discovery (0)	Exploitation of Remote Services (0)	Data from Local System (18)	Exfiltration Over Alternative Protocol (0)	Custom Cryptographic Protocol (0)	Disk Content Wipe (0)
Spearphishing Attachment (0)	Control Panel Items (0)	Authentication Package (0)	Bypass User Account Control (6)	CMSTP (0)	Credentials in Files (6)	File and Directory Discovery (0)	Internal Spearphishing (0)	Data from Network Shared Drive (0)	Exfiltration Over Command and Control Channel (0)	Data Encoding (0)	Disk Structure Wipe (0)
Spearphishing Link (0)	Dynamic Data Exchange (0)	BITs Jobs (0)	DLL Search Order Hijacking (0)	Code Signing (0)	Credentials in Registry (6)	Network Service Scanning (0)	Logon Scripts (0)	Data from Removable Media (0)	Exfiltration Over Other Network Medium (0)	Data Obfuscation (0)	Endpoint Denial of Service (0)
Spearphishing via Service (0)	Execution through API (24)	Bootkit (0)	Dylib Hijacking (0)	Compile After Delivery (0)	Exploitation for Credential Access (0)	Network Share Discovery (0)	Pass the Hash (0)	Data Staged (0)	Exfiltration Over Physical Medium (0)	Domain Fronting (0)	Firmware Corruption (0)
Supply Chain Compromise (0)	Execution through Module Load (0)	Browser Extensions (0)	Elevated Execution with Prompt (0)	Compiled HTML File (12)	Forced Authentication (0)	Remote Desktop Protocol (6)	Pass the Ticket (0)	Email Collection (12)	Scheduled Transfer (0)	Domain Generation Algorithms (0)	Inhibit System Recovery (6)
Trusted Relationship (0)	Exploitation for Client Execution (0)	Change Default File Association (18)	Emond (0)	Component Firmware (0)	Hooking (12)	Remote File Copy (0)	Remote Services (0)	Input Capture (18)	Man in the Browser (0)	Fallback Channels (0)	Network Denial of Service (0)
Valid Accounts (0)	Graphical User Interface (0)	Component Firmware (0)	Exploitation for Privilege Escalation (0)	Component Object Model Hijacking (0)	Input Prompt (0)	Remote Services (0)	Replication Through Removable Media (0)	Input Capture (18)	Screen Capture (0)	Multi-hop Proxy (0)	Resource Hijacking (0)
	InstallUtil (0)	Component Object Model Hijacking (0)	Extra Window Memory Injection (0)	Connection Proxy (0)	Kerberoasting (0)	Remote Services (0)	Shared Webroot (0)	Video Capture (0)	Video Capture (0)	Multi-Stage Channels (0)	Runtime Data Manipulation (0)
	Launchctl (0)	Create Account (0)	File System Permissions Weakness (0)	Control Panel Items (0)	Keychain (0)	Peripheral Device Discovery (0)	SSH Hijacking (0)			Multiband Communication (0)	Service Stop (0)
	Local Job Scheduling (0)	DLL Search Order Hijacking (0)	Hooking (12)	DCShadow (0)	LLMNR/NBT-NS Poisoning and Relay (0)	Permission Groups Discovery (0)	Taint Shared Content (0)			Port Knocking (0)	Stored Data Manipulation (0)
	LSASS Driver (0)	Dylib Hijacking (0)	Image File Execution Options Injection (0)	Deobfuscate/Decode Files or Information (0)	Network Sniffing (0)	Process Discovery (0)	Third-party Software (0)			Remote Access Tools (0)	System Shutdown/Reboot (0)
	Mahta (0)	Emond (0)	Disabling Security Tools (6)	Image File Execution Options Injection (0)	Password Filter DLL (0)	Query Registry (0)	Windows Admin Shares (0)			Remote File Copy (0)	Transmitted Data Manipulation (0)
	PowerShell (0)	External Remote Services (0)	DLL Search Order Hijacking (0)	Launch Daemon (0)	Private Keys (0)	Remote System Discovery (6)	Windows Remote Management (0)			Standard Application Layer Protocol (0)	
	Revsics/Reasms (0)	Now Service (6)	DLL Side-Loadin (0)	Steal Web Session Cookie (0)	Security Software Discovery (12)						

1. Review the top techniques that were used.
2. Double click on one of them.
3. Use the sub-views identity the target of the attack and the attack vector.

Example:

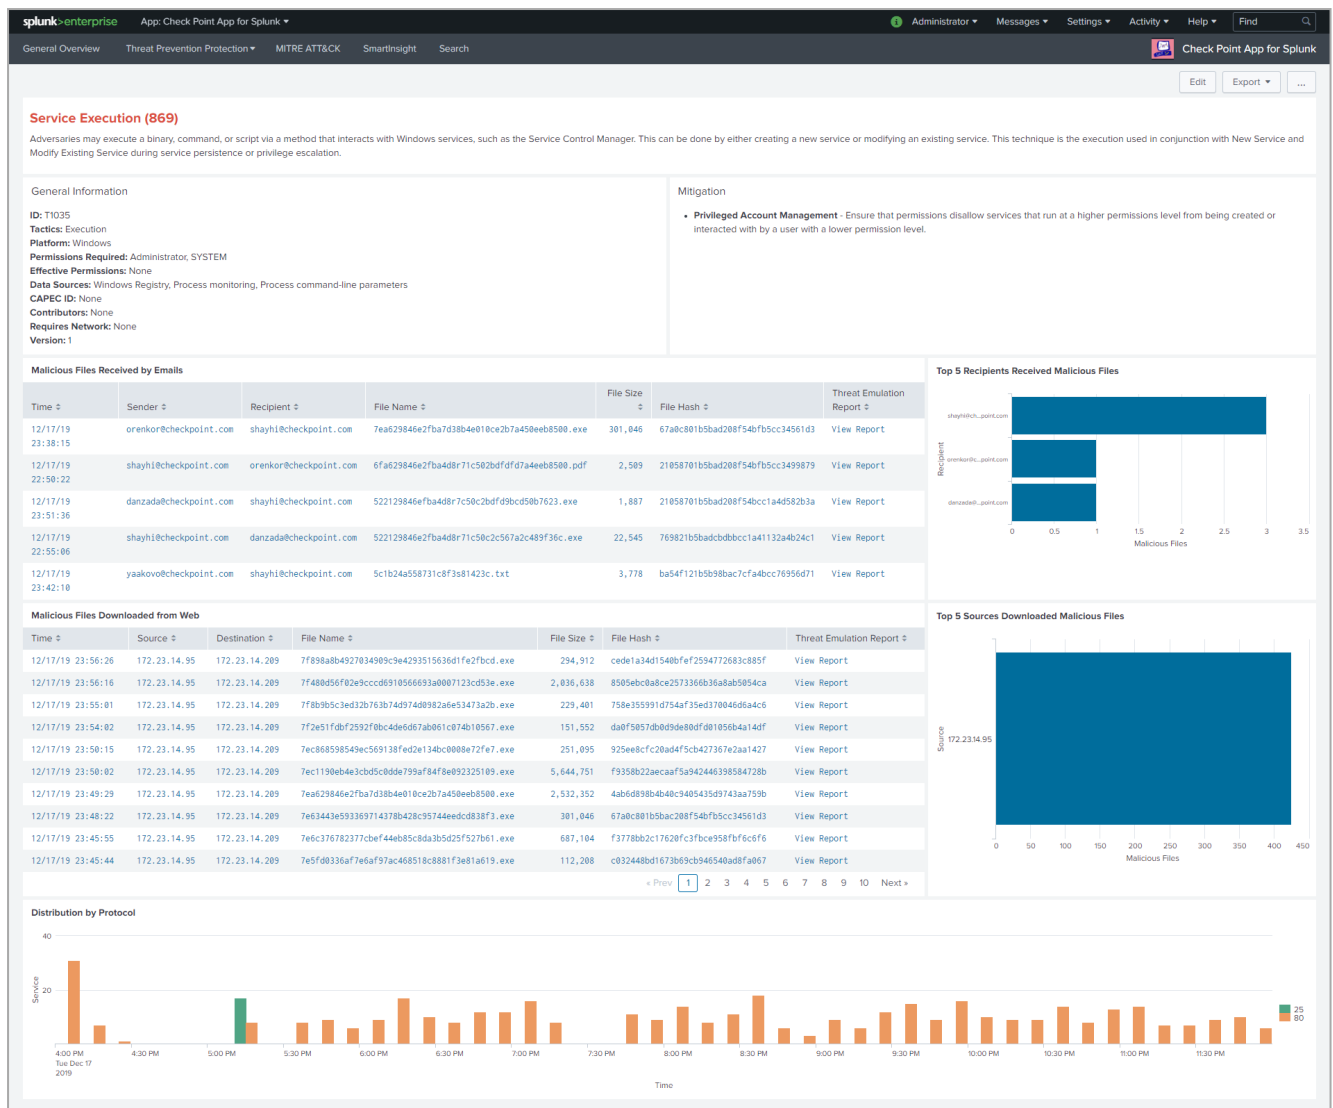

Note - The MITRE ATT&CK view is only available in R81 and higher.

MITRE ATT&CK Best Practices

Adding MITRE ATT&CK data to your logs lets you:

- Understand your unique attack landscape**

Focus on the top techniques used by your attackers. By gaining a high level view of your attackers intent, you can identify attack trends against your network.

Use MITRE ATT&CK to verify that your Threat Prevention policy is protecting your network against all types of tactics and techniques.

For additional information about the Check Point coverage of the MITRE ATT&CK, see [Enterprise matrix](#).

- Take action according to your attacker's intent**

Review the mitigation options offered by MITRE. These mitigation options are related to the specific type of attack launched against your network.

Log Fields

For the most recent description of the fields, see: [sk144192](#)

Command Line Reference

See the [R82.10 CLI Reference Guide](#).

Working with Kernel Parameters

See the [R82.10 Security Gateway Guide](#) > Chapter "Working with Kernel Parameters".

Kernel Debug

See the [R82.10 Security Gateway Guide](#) > Chapter "Kernel Debug on Security Gateway".

Glossary

A

Anti-Bot

Software Blade on a Check Point Firewall that blocks botnet behavior and communication to Command and Control (C&C) centers. Acronyms: AB, ABOT.

Anti-Spam

Software Blade on a Check Point Firewall that provides comprehensive protection for email inspection. Synonym: Anti-Spam & Email Security. Acronyms: AS, ASPAM.

Anti-Virus

Software Blade on a Check Point Firewall that uses real-time virus signatures and anomaly-based protections from ThreatCloud to detect and block malware at the Check Point Firewall before users are affected. Acronym: AV.

Application Control

Software Blade on a Check Point Firewall that allows granular control over specific web-enabled applications by using deep packet inspection. Acronym: APPI.

Ask

UserCheck rule action that blocks traffic and files and shows a UserCheck message. The user can agree to allow the activity.

Audit Log

Log that contains administrator actions on a Management Server (login and logout, creation or modification of an object, installation of a policy, and so on).

B

Bot

Malicious software that neutralizes Anti-Virus defenses, connects to a Command and Control center for instructions from cyber criminals, and carries out the instructions.

Bridge Mode

Check Point Firewall or Virtual System that works as a Layer 2 bridge device for easy deployment in an existing topology.

C

Check Point Firewall

Dedicated Check Point server that runs Check Point software to inspect traffic and enforce Security Policies for connected network resources. Formerly: Security Gateway.

Cluster

Two or more Check Point Firewalls that work together in a redundant configuration - High Availability, or Load Sharing.

Cluster Member

Check Point Firewall that is part of a cluster.

Compliance

Software Blade on a Management Server to view and apply the Security Best Practices to the managed Check Point Firewalls. This Software Blade includes a library of Check Point-defined Security Best Practices to use as a baseline for good Check Point Firewall and Policy configuration.

Content Awareness

Software Blade on a Check Point Firewall that provides data visibility and enforcement. Acronym: CTNT.

CoreXL

Performance-enhancing technology for Check Point Firewalls on multi-core processing platforms. Multiple Check Point Firewall instances are running in parallel on multiple CPU cores.

CoreXL Firewall Instance

On a Check Point Firewall with CoreXL enabled, the Firewall kernel is copied multiple times. Each replicated copy, or firewall instance, runs on one processing CPU core. These firewall instances handle traffic at the same time, and each firewall instance is a complete and independent firewall inspection kernel. Synonym: CoreXL FW Instance.

CoreXL SND

Secure Network Distributor. Part of CoreXL that is responsible for: Processing incoming traffic from the network interfaces; Securely accelerating authorized packets (if SecureXL is enabled); Distributing non-accelerated packets between Firewall kernel instances (SND maintains global dispatching table, which maps connections that were assigned to CoreXL Firewall instances). Traffic distribution between CoreXL Firewall instances is statically based on Source IP addresses, Destination IP addresses, and the IP 'Protocol' type. The CoreXL SND does not really "touch" packets. The decision to stick to a particular FWK daemon is done at the first packet of connection on a very high level, before anything else. Depending on the SecureXL settings, and in most of the cases, the SecureXL can be offloading decryption calculations. However, in some other cases, such as with Route-Based VPN, it is done by FWK daemon.

CPUSE

Check Point Upgrade Service Engine for Gaia Operating System. With CPUSE, you can automatically update Check Point products for the Gaia OS, and the Gaia OS itself.

D

DAIP Firewall

Check Point Firewall with a Dynamically Assigned IP (DAIP) is a server, on which the IP address of the external interface is assigned dynamically (by a DHCP server, by an ISP).

Data Loss Prevention

Software Blade on a Check Point Firewall that detects and prevents the unauthorized transmission of confidential information outside the organization. Acronym: DLP.

Data Type

Classification of data in a Check Point Security Policy for the Content Awareness Software Blade.

Detect

UserCheck rule action that allows traffic and files to enter the internal network and logs them.

Distributed Deployment

Configuration in which the Check Point Firewall and the Security Management Server products are installed on different servers.

Dynamic Object

Special object type, whose IP address is not known in advance. The Check Point Firewall resolves the IP address of this object in real time.

E

Endpoint Policy Management

Software Blade on a Management Server to manage an on-premises Endpoint Security environment.

Expert Mode

The name of the elevated command line shell that gives full system root permissions in the Check Point Gaia operating system.

G

Gaia

Check Point security operating system that combines the strengths of both SecurePlatform and IPSO operating systems.

Gaia Clish

The name of the default command line shell in Check Point Gaia operating system. This is a restricted shell (role-based administration controls the number of commands available in the shell).

Gaia Portal

Web interface for the Check Point Gaia operating system.

H

Hotfix

Software package installed on top of the current software version to fix a wrong or undesired behavior, and to add a new behavior.

HTTPS Inspection

Feature on a Check Point Firewall that inspects traffic encrypted by the Secure Sockets Layer (SSL) protocol for malware or suspicious patterns. Synonym: SSL Inspection. Acronyms: HTTPSI, HTTPSi.

I

ICA

Internal Certificate Authority. A component on Check Point Management Server that issues certificates for authentication.

ICAP Client

The ICAP Client functionality in a Check Point Firewall that enables it to interact with an ICAP Server responses (see RFC 3507), modify their content, and block the matched HTTP connections.

ICAP Server

The ICAP Server functionality in a Check Point Firewall that enables it to interact with an ICAP Client requests, send the files for inspection, and return the verdict.

Identity Awareness

Software Blade on a Check Point Firewall that enforces network access and audits data based on network location, the identity of the user, and the identity of the computer.
Acronym: IDA.

Identity Logging

Software Blade on a Management Server to view Identity Logs from the managed Check Point Firewalls with enabled Identity Awareness Software Blade.

Indicator

Pattern of relevant observable malicious activity in an operational cyber domain, with relevant information on how to interpret it and how to handle it.

Internal Network

Computers and resources protected by the Firewall and accessed by authenticated users.

IoC

Indicator of Compromise. Artifact observed on a network or in an operating system that, with high confidence, indicates a computer intrusion. Typical IoCs are virus signatures and IP addresses, MD5 hashes of Malware files, or URLs or domain names of botnet command and control servers. Identified through a process of incident response and computer forensics, intrusion detection systems and anti-virus software can use IoC's to detect future attacks.

IPS

Software Blade on a Check Point Firewall that inspects and analyzes packets and data for numerous types of risks (Intrusion Prevention System).

IPsec VPN

Software Blade on a Check Point Firewall that provides a Site to Site VPN and Remote Access VPN access.

J

Jumbo Hotfix Accumulator

Collection of hotfixes combined into a single package. Acronyms: JHA, JHF, JHFA.

K

Kerberos

An authentication server for Microsoft Windows Active Directory Federation Services (ADFS).

L

Log Server

Dedicated Check Point server that runs Check Point software to store and process logs.

Logging & Status

Software Blade on a Management Server to view Security Logs from the managed Check Point Firewalls.

M

Mail Transfer Agent

Feature on a Check Point Firewall that intercepts SMTP traffic and forwards it to the applicable inspection component. Acronym: MTA.

Malware Database

The Check Point database of commonly used signatures, URLs, and their related reputations, installed on a Check Point Firewall and used by the ThreatSpect engine.

Management Interface

(1) Interface on a Gaia Check Point Firewall or Cluster Member, through which Management Server connects to the Check Point Firewall or Cluster Member. (2) Interface on Gaia computer, through which users connect to Gaia Portal or CLI.

Management Server

Check Point Single-Domain Security Management Server or a Multi-Domain Security Management Server.

Manual NAT Rules

Manual configuration of NAT rules by the administrator of the Check Point Management Server.

Mirror and Decrypt

The Mirror and Decrypt feature on a Check Point Firewall that performs these actions: (1) Mirror only of all traffic - Clones all traffic (including HTTPS without decryption) that passes through, and sends it out of the designated physical interface. (2) Mirror and Decrypt of HTTPS traffic - Clones all HTTPS traffic that passes through, decrypts it, and sends it in clear-text out of the designated physical interface. Acronym: M&D.

Mobile Access

Software Blade on a Check Point Firewall that provides a Remote Access VPN access for managed and unmanaged clients. Acronym: MAB.

Multi-Domain Log Server

Dedicated Check Point server that runs Check Point software to store and process logs in a Multi-Domain Security Management environment. The Multi-Domain Log Server consists of Domain Log Servers that store and process logs from [tp_cpfws] that are managed by the corresponding Domain Management Servers. Acronym: MDLS.

Multi-Domain Security Management Server

Dedicated Check Point server that runs Check Point software to host virtual Security Management Servers called Domain Management Servers. Synonym: Multi-Domain Security Management Server. Acronym: MDS.

N

Network Object

Logical object that represents different parts of corporate topology - computers, IP addresses, traffic protocols, and so on. Administrators use these objects in Security Policies.

Network Policy Management

Software Blade on a Management Server to manage an on-premises environment with an Access Control and Threat Prevention policies.

O

Observable

Event or stateful property that can be observed in an operational cyber domain.

Open Server

Physical computer manufactured and distributed by a company, other than Check Point.

P

Prevent

UserCheck rule action that blocks traffic and files and can show a UserCheck message.

Provisioning

Software Blade on a Management Server that manages large-scale deployments of Check Point Firewalls using configuration profiles. Synonyms: SmartProvisioning, SmartLSM, Large-Scale Management, LSM.

Q

QoS

Software Blade on a Check Point Firewall that provides policy-based traffic bandwidth management to prioritize business-critical traffic and guarantee bandwidth and control latency.

R

Rule

Set of traffic parameters and other conditions in a Rule Base (Security Policy) that cause specified actions to be taken for a communication session.

Rule Base

All rules configured in a given Security Policy. Synonym: Rulebase.

S

SecureXL

Performance-enhancing technology on a Check Point Firewall that accelerates IPv4 and IPv6 traffic that passes through the Check Point Firewall.

Security Management Server

Dedicated Check Point server that runs Check Point software to manage the objects and policies in a Check Point environment within a single management Domain. Synonym: Single-Domain Security Management Server.

Security Policy

Collection of rules that control network traffic and enforce organization guidelines for data protection and access to resources with packet inspection.

SIC

Secure Internal Communication. The Check Point proprietary mechanism with which Check Point computers that run Check Point software authenticate each other over SSL, for secure communication. This authentication is based on the certificates issued by the ICA on a Check Point Management Server.

SmartConsole

Check Point GUI application used to manage a Check Point environment - configure Security Policies, configure devices, monitor products and events, install updates, and so on.

SmartDashboard

Legacy Check Point GUI client used to create and manage the security settings in versions R77.30 and lower. In versions R80.X and higher is still used to configure specific legacy settings.

SmartProvisioning

Software Blade on a Management Server (the actual name is "Provisioning") that manages large-scale deployments of Check Point Firewalls using configuration profiles. Synonyms: Large-Scale Management, SmartLSM, LSM.

SmartUpdate

Legacy Check Point GUI client used to manage licenses and contracts in a Check Point environment.

Software Blade

Specific security solution (module): (1) On a Check Point Firewall, each Software Blade inspects specific characteristics of the traffic (2) On a Management Server, each Software Blade enables different management capabilities.

Standalone

Configuration in which the Check Point Firewall and the Security Management Server products are installed and configured on the same server.

STIX

Structured Threat Information eXpression™. A language that describes cyber threat information in a standardized and structured way.

T

Threat Emulation

Software Blade on a Check Point Firewall that monitors the behavior of files in a sandbox to determine whether or not they are malicious. Acronym: TE.

Threat Emulation Private Cloud Appliance

Check Point appliance that is certified to support the Threat Emulation Software Blade.

Threat Extraction

Software Blade on a Check Point Firewall that removes malicious content from files. Acronym: TEX.

ThreatCloud

The cyber intelligence center of all of Check Point products. Dynamically updated based on an innovative global network of threat sensors and invites organizations to share threat data and collaborate in the fight against modern malware.

ThreatCloud Repository

Cloud database with more than 250 million Command and Control (C&C) IP, URL, and DNS addresses and over 2,000 different botnet communication patterns, used by the ThreatSpect engine to classify bots and viruses. See: <https://www.checkpoint.com/infinity-vision/threatcloud/>

ThreatSpect Engine

Unique multi-tiered engine that analyzes network traffic and correlates data across multiple layers (reputation, signatures, suspicious mail outbreaks, behavior patterns) to detect bots and viruses.

Traditional VSX Firewall

Physical server that hosts Traditional VSX virtual networks, including all Virtual Devices that provide the functionality of physical network devices. It holds at least one Virtual System, which is called VS0.

U

Updatable Object

Network object that represents an external service, such as Microsoft 365, AWS, Geo locations, and more.

URL Filtering

Software Blade on a Check Point Firewall that allows granular control over which web sites can be accessed by a given group of users, computers or networks. Acronym: URLF.

User Directory

Software Blade on a Management Server that integrates LDAP and other external user Management Servers with Check Point products and security solutions.

UserCheck

Functionality in a Check Point Firewall and endpoint clients that gives users a warning when there is a potential risk of data loss or security violation. This helps users to prevent security incidents and to learn about the organizational security policy.

V

VSX

Virtual System Extension. Check Point virtual networking solution, hosted on a computer or cluster with virtual abstractions of Check Point Firewalls and other network devices. These Virtual Devices provide the same functionality as their physical counterparts.

Z

Zero Phishing

Software Blade on a Check Point Firewall (R81.20 and higher) that provides real-time phishing prevention based on URLs. Acronym: ZPH.